



STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

ROY COOPER
GOVERNOR

J. ERIC BOYETTE
SECRETARY

November 18, 2022

Addendum No. 1

RE: **DD00404**
Johnston County

To Whom It May Concern:

Reference is made to the above-mentioned project. The following changes/additions have been made:

1. An error was made on the Summary of Quantities on Maps 4 and 8 in reference to the Typical Section numbers. Widening is only required on Map 4. Also, the Typical Section 8 has been to correctly show S9.5C. Please replace the Summary of Quantity Sheets, Typical Section 8 and the Proposal Item Sheets in the proposal with the attached sheets dated Nov 18, 2022.

This sheet and attachments shall be made a part of the plans and bid documents and shall be submitted with the bid. Bids submitted without the addenda and attachments will be considered non-responsive.

If there are any questions, please contact me at (252) 640-6433.

Sincerely,

DocuSigned by:
Vickie P. Gardner

BD9FE36C1AA642B...

11/18/2022


Vickie P. Gardner
Division Four Contract Engineer

VPG/
Attachments


PROJECT NO.	SHEET NO.	TOTAL NO.
2023CPT.04.09.10511.1, 2023CPT.04.09.20511.1,	2	2
48879.3.1		

THERMOPLASTIC AND PAINT QUANTITIES

PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	TYP NO	LANES	LANE TYPE	LENGTH	WIDTH	4413000000-E	4420000000-N	4457000000-N	4688000000-E		4720000000-E	4725000000-E			4847100000-E		4890000000-E		4709000000-E				
										WORK ZONE ADVANCE/GENERAL WARNING SIGNING	PORTABLE CHANGEABLE MESSAGE SIGN	TEMPORARY TRAFFIC CONTROL	6" X 90 M YELLOW THERMO	6" X 90 M WHITE THERMO	THERMO MSG ONLY 90 M	THERMO LT ARROW 90 M	THERMO RT ARROW 90 M	THERMO STR ARROW 90 M	THERMO LT STR RT ARROW 90 M	THERMO STR & LT ARROW 90 M	6" WHITE POLYUREA (HIGHLY REFLECTIVE ELEMENTS)	6" YELLOW POLYUREA (HIGHLY REFLECTIVE ELEMENTS)	GENERIC PAVEMENT MARKING ITEM 4" X 50 M WHITE HOT SPRAY THERMOPLASTIC	GENERIC PAVEMENT MARKING ITEM 4" X 50 M YELLOW HOT SPRAY THERMOPLASTIC	GENERIC PAVEMENT MARKING ITEM 24" X 90 M WHITE THERMO		
								MI	FT	SF	EA	LS	LF	LF	EA	EA	EA	EA	EA	EA	EA	EA	EA	EA			
2023CPT.04.09.10511.1	Johnston	15	US 701	SR 1242 - NC 96	7	2	2WU	0.76	34	73	2	0.02	7,625	8,026		5	5							60			
TOTAL FOR MAP NO. 15								0.76		73	2	0.02	7,625	8,026		5	5							60			
2023CPT.04.09.10511.1	Johnston	16	NC 210	SR 1010 - US 70	7	2	2WU	1.53	26	147	2	0.05	15,041	16,463		2		4				1,700	1,700	260			
TOTAL FOR MAP NO. 16								1.53		147	2	0.05	15,041	16,463		2		4				1,700	1,700		260		
2023CPT.04.09.10511.1	Johnston	19	US 70 BUS WB	JOINT EAST OF SHOTWELL RD - JOINT WEST OF SHOTWELL RD	8	3	MD	0.52	44	50	2	0.03	2,746	6,315		1	3	11						300			
TOTAL FOR MAP NO. 19								0.52		50	2	0.03	2,746	6,315		1	3	11							300		
2023CPT.04.09.10511.1	Johnston	18	US 70 BUS EB	JOINT EAST OF SHOTWELL RD - JOINT WEST OF SHOTWELL RD	8	2	MD	0.5	30	48	2	0.03	2,640	5,555	4	3	3	4						300			
TOTAL FOR MAP NO. 18								0.5		48	2	0.03	2,640	5,555	4	3	3	4							300		
TOTAL FOR PROJ NO. 2023CPT.04.09.10511.1								3.31		318	8	0.13	28,052	36,359	4	11	11	19					1,700	1,700		920	
													64,411					41					3,400				
2023CPT.04.09.20511.1	Johnston	1	SR 1913 - WILSONS MILL RD	FROM SR 1923 TO US 70 BUS	1	2	2WU	0.99	20	95		0.03					2						10,454	10,454	100		
TOTAL FOR MAP NO. 1								0.99		95		0.03					2							10,454	10,454	100	
2023CPT.04.09.20511.1	Johnston	2	SR 1900 - W NOBLE ST	US 301 TO SR 1003	2 & 7	2	2WD	1.43	20	137		0.05				1			1			15,101	14,723				
TOTAL FOR MAP NO. 2								1.43		137		0.05				1			1				15,101	14,723			
2023CPT.04.09.20511.1	Johnston	3	A SR 1555 - BARBER MILL RD	SR 1010 - SR 1559	3	2	2WU	2.19	24	210		0.07										23,126	20,814				
TOTAL FOR MAP NO. 3								2.19		210		0.07												23,126	20,814		
2023CPT.04.09.20511.1	Johnston	4	SR 1723 - EARPSBORO RD	NASH CO LINE - WAKE CO LINE	4	2	2WU	3.61	20	347		0.12										38,844	32,400	60			
TOTAL FOR MAP NO. 4								3.61		347		0.12												38,844	32,400	60	
2023CPT.04.09.20511.1	Johnston	5	SR 1546 - PIERCE RD	SR 1010 - NC 50	3	2	2WU	1.6	20	154		0.06										16,900	15,800	20			
TOTAL FOR MAP NO. 5								1.6		154		0.06												16,900	15,800	20	
2023CPT.04.09.20511.1	Johnston	6	SR 1524 - OLD DRUG STORE RD	NC 42 - NC 50	3	2	2WU	2.55	20	531	2	0.08				20	15			3		27,000	28,000				
TOTAL FOR MAP NO. 6								2.55		531	2	0.08				20	15			3				27,000	28,000		
2023CPT.04.09.20511.1	Johnston	7	SR 1242 - HEATH RD	NC 96 - US 701	3	2	2WU	0.79	20	76		0.02				20	15			3		8,350	7,500				
TOTAL FOR MAP NO. 7								0.79		76		0.02				20	15			3				8,350	7,500		
2023CPT.04.09.20511.1	Johnston	8	SR 1305 - PLEASANT HILL CHURCH RD	SR 1303 - NC 50	3	2	2WU	1.23	18	118		0.04										13,000	11,500				
TOTAL FOR MAP NO. 8								1.23		118		0.04													13,000	11,500	
2023CPT.04.09.20511.1	Johnston	9	SR 2522 - MARTIN LIVESTOCK RD	SR 2530 - US 70	3	2	2WU	0.67	20	64		0.02										7,100	6,000				
TOTAL FOR MAP NO. 9								0.67		64		0.02												7,100	6,000		
2023CPT.04.09.20511.1	Johnston	10	SR 1115 - T-BAR RD	SR 1113 - SR 1116	3	2	2WU	1.49	20	143		0.06										15,750	13,400				
TOTAL FOR MAP NO. 10								1.49		143		0.06													15,750	13,400	
2023CPT.04.09.20511.1	Johnston	11	SR 1120 - LEE-JOHNSON RD	NC 55 - SR 1113	3	2	2WU	1.5	20	322		0.04										15,900	13,500				
TOTAL FOR MAP NO. 11								1.5		322		0.04													15,900	13,500	
2023CPT.04.09.20511.1	Johnston	12	SR 1193 - LANGSTON RD	SR 1192 - SR1192	3	2	2WU	1.52	20	146		0.04										16,051	13,644				
TOTAL FOR MAP NO. 12								1.52		146		0.04												16,051	13,644		
2023CPT.04.09.20511.1	Johnston	13	SR 1216 - HUMMINGBIRD RD	SR 1166 - SR 1229	3	2	2WU	0.87	20	84		0.03										9,187	7,350				
TOTAL FOR MAP NO. 13								0.87		84		0.03													9,187	7,350	
2023CPT.04.09.20511.1	Johnston	17	SR 1845 - SANDLEBROOK DR	SR 1570 - END	5	2	2WU	0.2	20	19		0.01															
TOTAL FOR MAP NO. 17								0.2		19		0.01															
2023CPT.04.09.20511.1	Johnston	14	SR 1586 - W. OLIVE RD	US 70 BUS - SR 1573	3	2	2WU	0.83	20	80		0.02										10,032	10,032				
TOTAL FOR MAP NO. 14								0.83		80		0.02													10,032	10,032	
TOTAL FOR PROJ NO. 2023CPT.04.09.20511.1								21.47		2,526	2	0.69					21	17	42			1	3		226,795	205,117	180
													64,411					83					3,400		431,912		
48879.3.1	Johnston	3	B SR 1555 - BARBER MILL RD	SR 1559 - NC 42	6	2	2WU	5.7	20	547		0.18															
TOTAL FOR MAP NO. 3								5.7		547		0.18															
TOTAL FOR PROJ NO. 48879.3.1								5.7		547		0.18															
GRAND TOTAL								30.48		3,391	10	1.00	28,052	36,359	4	32	28	19	1	3	1,700	1,700	226,795	205,117	1,100		
													64,411					83					3,400		431,912		

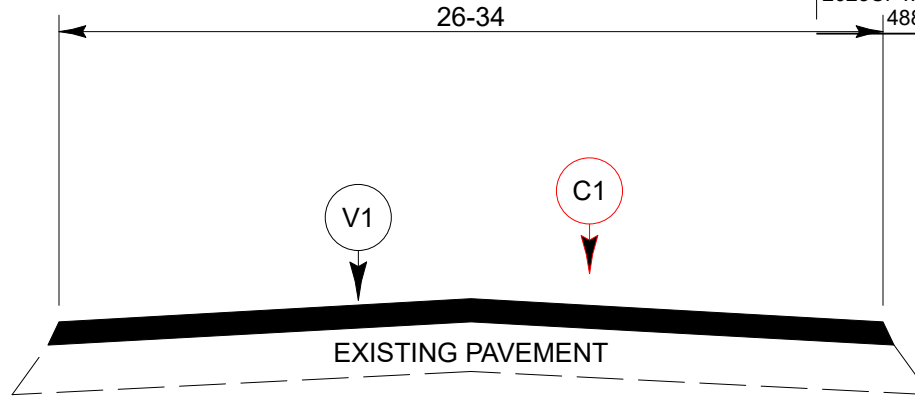

TYPICAL SECTION NO. 7

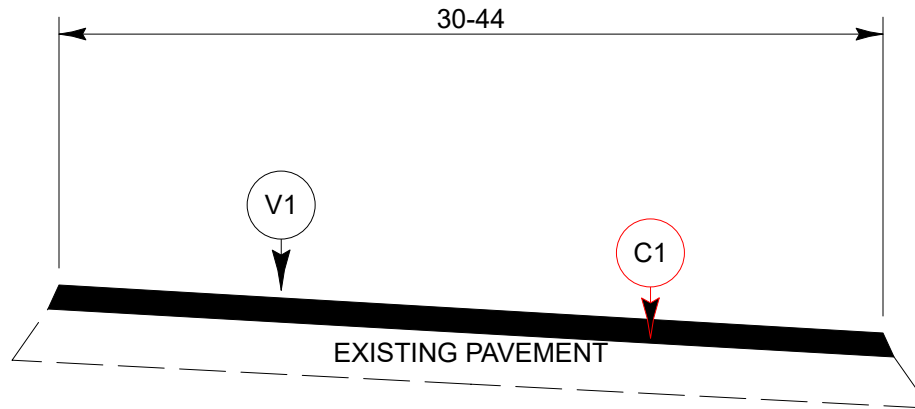

TYPICAL SECTION NO. 8

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.5" OF S9.5C AT AN AVERAGE RATE OF 168 LBS. PER SQ. YARD
C2	PROP. APPROX. 1.25" OF S9.5B AT AN AVERAGE RATE OF 138 LBS. PER SQ. YARD
C3	PROP. APPROX. 1.5" OF S9.5B AT AN AVERAGE RATE OF 165 LBS. PER SQ. YARD
E1	ASPHALT CONCRETE BASE COURSE B25.0C, AT AN AVERAGE RATE OF 456 LBS PER SQ YD (4")
E2	ASPHALT CONCRETE INTERMEDIATE COURSE I19.0C, AT AN AVERAGE RATE OF 456 LBS PER SQ YD (4")
V1	MILL ASPHALT PAVEMENT, 1 1/2" DEPTH

County: JOHNSTON

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
ROADWAY ITEMS						
0001	0000100000-N	800	MOBILIZATION	Lump Sum	L.S.	
0002	1220000000-E	545	INCIDENTAL STONE BASE	198 TON		
0003	1297000000-E	607	MILLING ASPHALT PAVEMENT, **** DEPTH (1.5")	94,233 SY		
0004	1330000000-E	607	INCIDENTAL MILLING	4,435 SY		
0005	1491000000-E	610	ASPHALT CONC BASE COURSE, TYPE B25.0C	2,092 TON		
0006	1503000000-E	610	ASPHALT CONC INTERMEDIATE COURSE, TYPE I19.0C	3,304 TON		
0007	1519000000-E	610	ASPHALT CONC SURFACE COURSE, TYPE S9.5B	21,111 TON		
0008	1523000000-E	610	ASPHALT CONC SURFACE COURSE, TYPE S9.5C	7,157 TON		
0009	1575000000-E	620	ASPHALT BINDER FOR PLANT MIX	2,119 TON		
0010	1704000000-E	SP	PATCHING EXISTING PAVEMENT	430 TON		
0011	2830000000-N	858	ADJUSTMENT OF MANHOLES	6 EA		
0012	2845000000-N	858	ADJUSTMENT OF METER BOXES OR VALVE BOXES	2 EA		
0013	4413000000-E	SP	WORK ZONE ADVANCE/GENERAL WARNING SIGNING	3,391 SF		
0014	4420000000-N	1120	PORTABLE CHANGEABLE MESSAGE SIGN	10 EA		
0015	4457000000-N	SP	TEMPORARY TRAFFIC CONTROL	Lump Sum	L.S.	
0016	4688000000-E	1205	THERMOPLASTIC PAVEMENT MARKING LINES (6", 90 MILS)	64,411 LF		
0017	4709000000-E	1205	THERMOPLASTIC PAVEMENT MARKING LINES (24", 90 MILS)	1,100 LF		

County: JOHNSTON

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0018	4720000000-E	1205	THERMOPLASTIC PAVEMENT MARKING CHARACTER (90 MILS)	4 EA		
0019	4725000000-E	1205	THERMOPLASTIC PAVEMENT MARKING SYMBOL (90 MILS)	83 EA		
0020	4847040000-E	1205	POLYUREA PAVEMENT MARKING LINES (6", 30 MILS)	3,400 LF		
0021	4890000000-E	SP	GENERIC PAVEMENT MARKING ITEM THERMOPLASTIC PAVEMENT MARKING LINES (4", 50 MILS)	431,912 LF		
0022	5255000000-N	1413	PORTABLE LIGHTING	Lump Sum	L.S.	
0023	7444000000-E	1725	INDUCTIVE LOOP SAWCUT	3,200 LF		

1124/Nov18/Q642601/D73405140000/E23

Total Amount Of Bid For Entire Project :