




STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION

PAT MCCRORY  
GOVERNOR

ANTHONY J. TATA  
SECRETARY


June 2, 2014

TO: Prospective Bidders  
FROM: W. Jeff Turner,  Division Proposals Engineer  
SUBJECT: Contract DI00061  
**Addendum #1 -**  
Resurfacing on Various Roads in Davie County

The subject contract proposal contains the following addendum:

1. Replace Sheet No. 5.


This addendum officially becomes part of the contract.

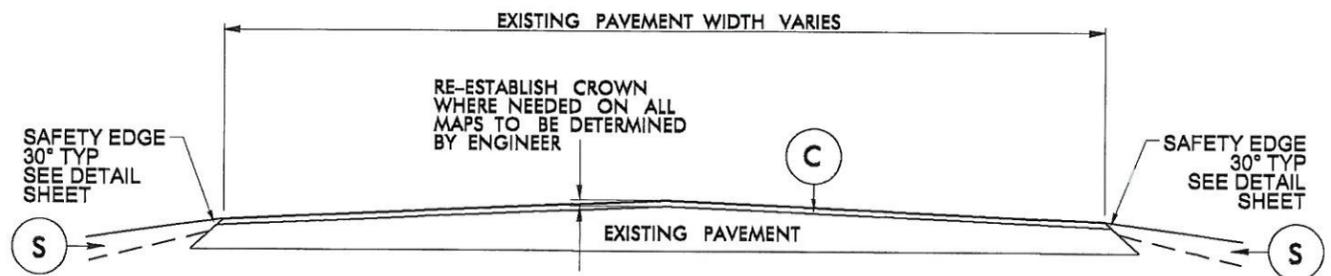

Shoulder reconstruction in areas only with no outside curb (typ.)

Shoulder reconstruction in areas only with no outside curb (typ.)


**TYPICAL SECTION NO. 1**  
 MAP NO.1 NC 801  
 MAP NO.4 SR 1147 DAVIE ACADEMY RIDGE ROAD  
 MAP NO.5 SR 1116 GREENHILL ROAD

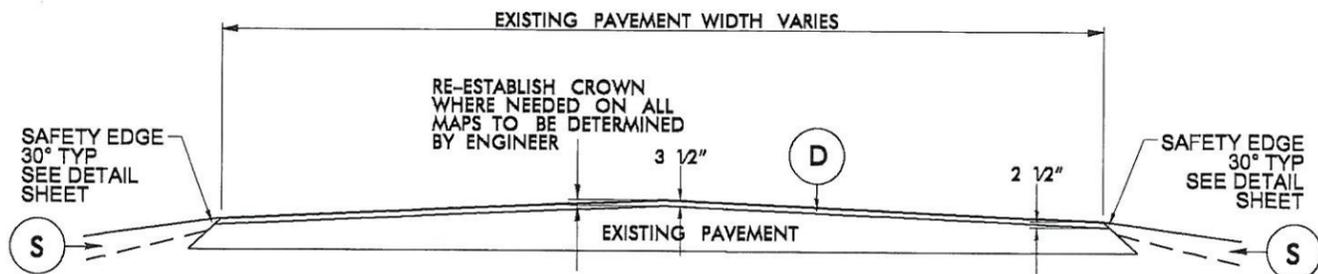

Shoulder reconstruction in areas only with no outside curb (typ.)

Shoulder reconstruction in areas only with no outside curb (typ.)

**TYPICAL SECTION NO. 2**  
 MAP NO.2 SR 1338 COUNTY LINE ROAD  
 MAP NO.3 SR 1307 JAMES CHURCH ROAD

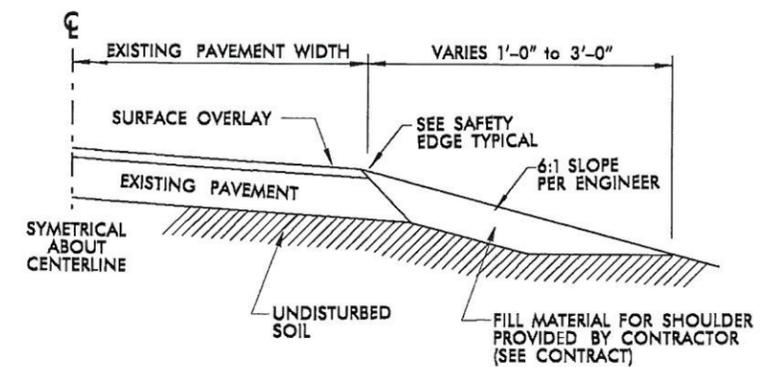

**SHOULDER RECONSTRUCTION**

PAVEMENT SCHEDULE	
C	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, TO BE APPLIED AT AN AVERAGE RATE OF 168 LBS PER SQ YD
D	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 2 1/2" IN DEPTH TO BE APPLIED AT AN AVERAGE RATE OF 342 LBS PER SQ YD
S	SHOULDER RECONSTRUCTION (SEE DETAIL)
U	EXISTING PAVEMENT