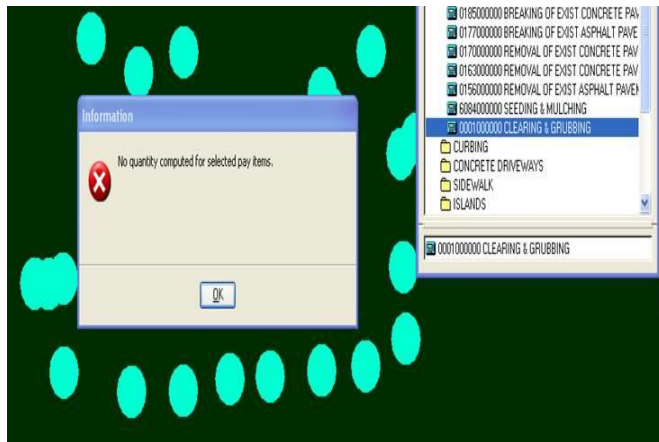## 12_09 Clearing and Grubbing D&C Tolerance
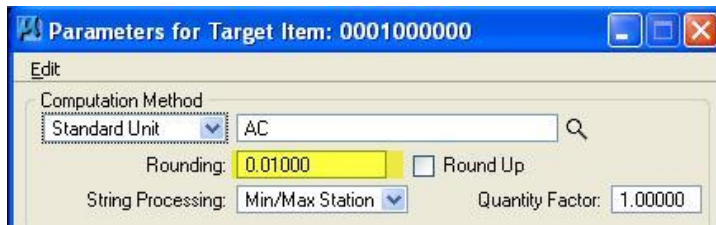
Question:

I'm using the Roadway Payitem DDB to compute clearing and grubbing. I'm getting the below error message in certain areas of the project. The individual tree circular shapes are being highlighted but not computed during the harvest process. What is the cause of the problem and how can it be fixed?

Answer:

The average shape diameter is approximately 12' (area = $\pi(r)^2$ = 0.0026 acre). The rounding tolerance for clearing grubbing is set to 0.01 Acre.

Changing this value to 0.001 (Acre) resolved the issue.