


14_25 Non-Standard Berm Ditch (STD 240.01)

Question:

Hydro has recommended a non-standard berm ditch that is 10' wide with a 3:1 front slope. There are no define statements in the Criteria Library to specify this criteria. How can I use criteria to draw these non-standard berm ditches?

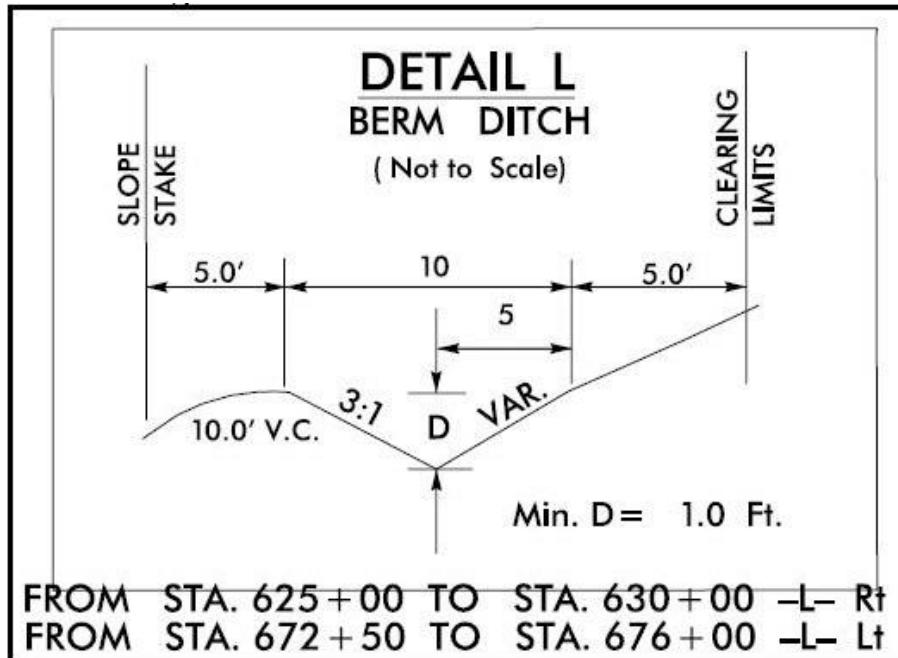

Answer:

Drawing Standards 240.01 calls for a 2:1 front slope for a 6' wide ditch. You can override the standard default values with the inclusion of these two variables in your criteria input file.

```
DEFINE "BRM01 FRONT SLOPE" 3  
DEFINE "BRM01 DITCH WIDTH" 5  
DEFINE "BRM01 BACKSLOPE WIDTH" 5
```