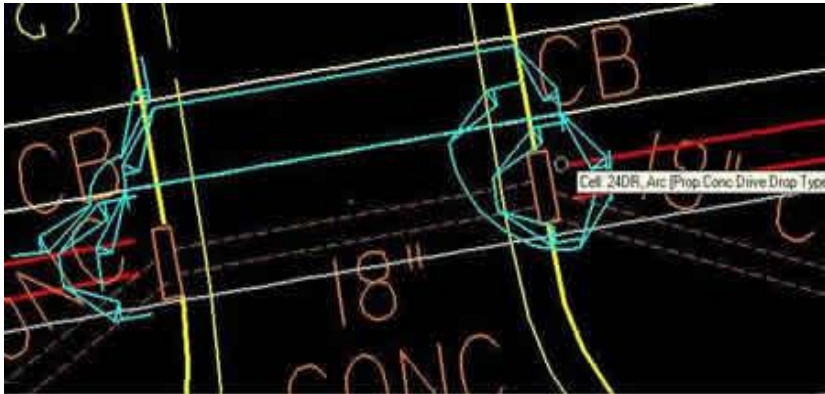**17_15 Plotting Concrete Driveways**

Question:
My concrete driveway cells are not plotted out correctly. What could be the problem?

Answer:
The combination of the older cells having new level line style is the problem.

To get concrete driveways to plot:

- If the driveways were originally place as cells (pre-v8), then the level should left as "Old_Level_#" with line style of zero and cell name "#DR" or "#DRP".
- If driveways are placed as line styles (new method), then leave them with the correct level name and line style (RDY Drive Drop Type).

One should not combine the two methods like the picture above.