



NCDOT Prioritization 3.0 Project Summary

SPOT ID: H090090

Mode: Highway

Status: Submitted

NC-16

From/Cross Street: Catawba River

Specific Improvement Type: 16 - Modernize Roadway

To: Wilkes County Line

Project Category: Regional Impact

Length: 16.68

TIP#: R-2403

Fully Funded in Draft STIP? No

Cost to NCDOT: \$49,362,000

Description:


Catawba River to Wilkes County Line. Upgrade Two Lane Roadway.

Division(s): Division 12

County(s): ALEXANDER

MPOS(s)/RPO(s): Unifour RPO, Greater Hickory MPO

Project Location

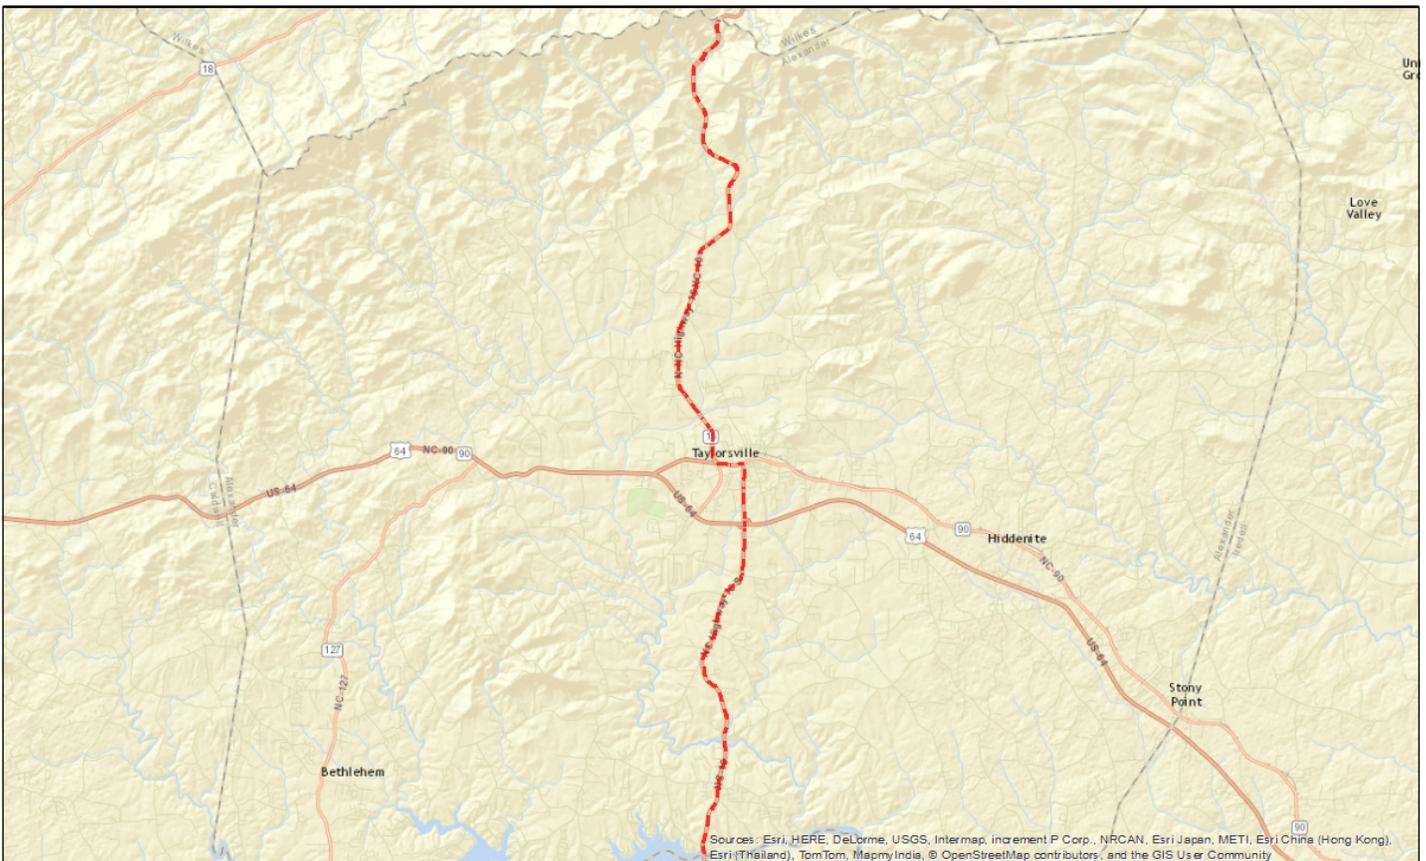

Statewide Mobility Total Score: 0

Quantitative Score	Division Engineer Local Input Points	MPO/RPO Local Input Points
	N/A	N/A
Totals: Weight: 0% Weighted Score: 0		

Regional Impact Total Score: 30.29

Quantitative Score	Division Engineer Local Input Points	MPO/RPO Local Input Points
Safety (10%) 55.96	Percent: 15% Points: 0	Percent: 15% Points: 100
[Travel Time] Benefit/Cost (25%) 0.00		
Accessibility / Connectivity (10%) 11.36		
Congestion (V/C) (25%) 34.24		
Totals: Weight: 70% Weighted Score: 15.29		

Division Needs Total Score: 34.44

Quantitative Score	Division Engineer Local Input Points	MPO/RPO Local Input Points
Congestion (V/C) (20%) 34.24	Percent: 25% Points: 0	Percent: 25% Points: 88
Safety (10%) 55.96		
[Travel Time] Benefit/Cost (20%) 0.00		
Totals: Weight: 50% Weighted Score: 12.44		

Project Data ***Existing Conditions**

Existing Cross-Section:	
Speed Limit:	51
Length (miles);	16.68
Facility Type:	Two Lane Highway
Access Control:	None
Functional Classification:	Minor Arterial
Terrain Type:	Rolling
Lane Width:	12
Paved Shoulder Width:	1
Roadway has Curb & Gutter?	No
Volume (AADT):	8036.2
Capacity:	15543.3
Volume/Capacity Ratio:	0.52
% Autos:	92%
% Trucks:	8%
Truck Volume:	668.83
Crash Density:	62.56
Crash Severity:	63.72
Critical Crash Rate:	41.63
Crash Frequency:	0
Severity Index:	0
County Tier Designation:	2
Non-Interstate STRAHNET Route?	No
Average Commuting Time:	23
Existing Median Type (for Cost Estimation):	Undivided
Pavement Condition Rating:	83
Actual Congested Speed:	44.28
Travel Time Index:	1.11

Project Benefits

Project Cross-Section:	
Speed Limit:	51
Length (miles):	16.68
Facility Type:	Two Lane Highway
Access Control:	None
Functional Classification:	Minor Arterial
TerrainType:	Rolling
DOT Design Lane Width:	12
DOT Design Paved Shoulder Width:	4
Travel Time Savings for 30 Years (Total):	0
Travel Time Savings for 30 Years (Autos):	0
Travel Time Savings for 30 Years (Trucks):	0
Long-Term Employment:	
% Change in Economy:	
Provides Direct Connection to Transportation Terminal?	No
Does project upgrade how the roadway functions?	No
In CTP or LRTP?	
CTP/LRTP Name:	
CTP/LRTP Completion Year:	
Submitted by:	Division 12

* Data reflects calculations which include weighted averages (where applicable) and represent raw output from the Department's SPOT On!ine tool and associated databases.

Project Ownership

Division

Division	Percent	Regional Impact	Division Needs
Division 12	100%	0	0
	0%	0	0
	0%	0	0
TOTAL Division Points		0	0

MPO/RPO

MPO/RPO	Percent	Regional Impact	Division Needs
Unifour RPO	88%	88	88
Greater Hickory MPO	12%	12	0
	0%	0	0
TOTAL MPO/RPO Points		100	88

Project Cost and Source

Construction Cost:	\$49,362,000	TIP Unit
Right-of-Way Cost:	\$0	Cost Estimation Tool
Utilities Cost:	\$0	Cost Estimation Tool
Total Project Cost:	\$49,362,000	
Other Funding:	\$0	None
Cost to NCDOT :	\$49,362,000	