



NCDOT Prioritization 3.0 Project Summary

SPOT ID: H090711

Mode: Highway

Status: Submitted

US-117, NC-132 (College Road)

From/Cross Street: SR 2048 (Gordan Road)

Specific Improvement Type: 4 - Upgrade Arterial to Superstreet

To: SR 1272 (New Centre Drive)

Project Category: Statewide Mobility

Length: 2.86

TIP#:

Fully Funded in Draft STIP? No

Cost to NCDOT: \$84,213,000

Description:


Upgrade College Road from Gordon Road to the SR 1272 (New Centre Drive).

Division(s): Division 3

County(s): NEW HANOVER

MPOS(s)/RPO(s): Wilmington Urban Area MPO

Project Location

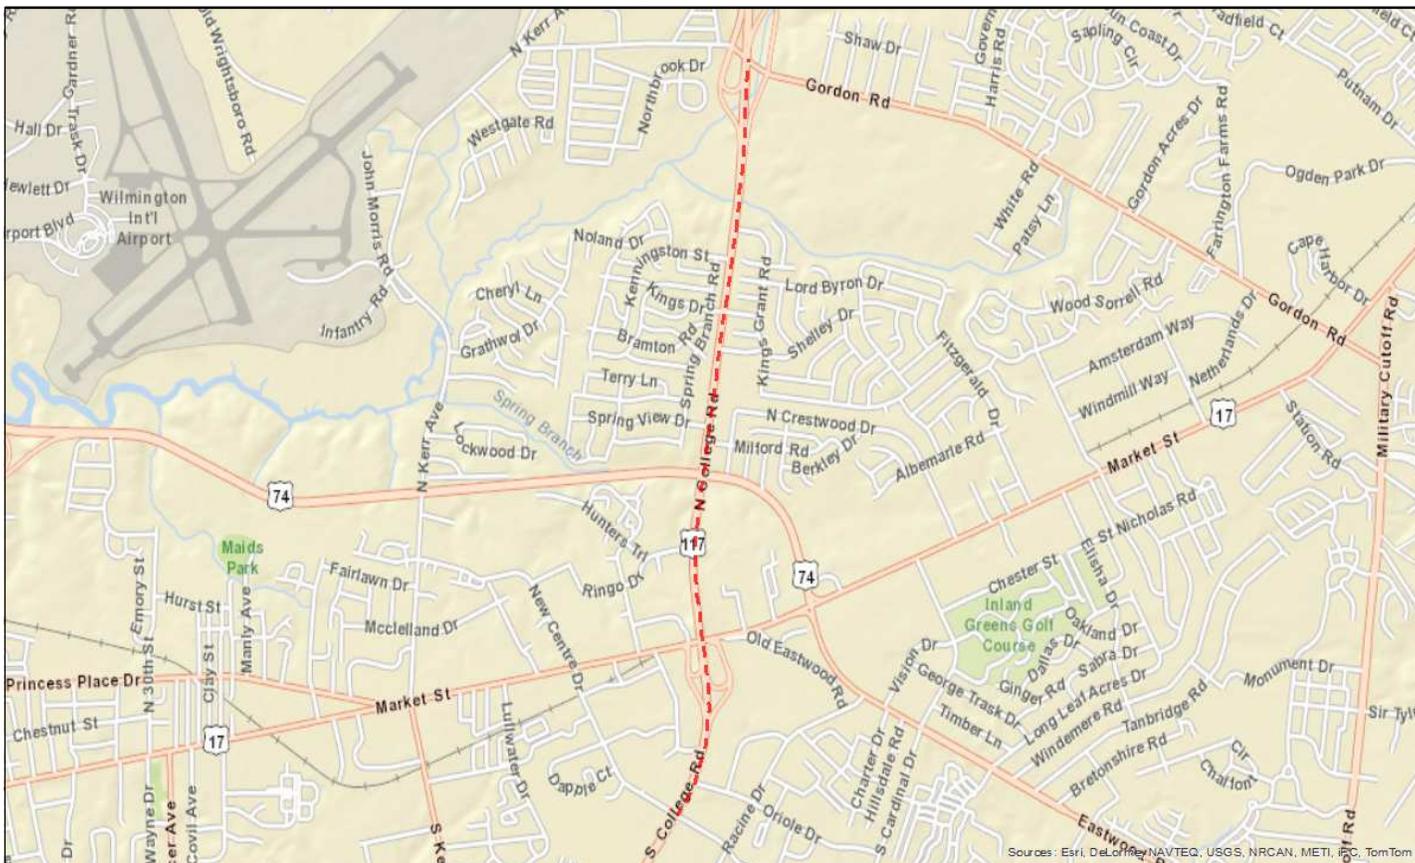

Sources: Esri, DeLorme, NAVTEQ, USGS, NRCAN, METI, IPC, TomTom

Statewide Mobility Total Score: 43.61

Quantitative Score	Division Engineer Local Input Points	MPO/RPO Local Input Points
Congestion (V/C) (30%) 77.25 Safety (10%) 83.30 Economic Competitiveness (10%) 38.83 Multimodal + [Freight & Military] (20%) 32.30 [Travel Time] Benefit/Cost (30%) 5.88	N/A	N/A
Totals: Weight: 100% Weighted Score: 43.61		

Regional Impact Total Score: 0

Quantitative Score	Division Engineer Local Input Points	MPO/RPO Local Input Points
Safety (25%) 83.30 Multimodal + [Freight & Military] (25%) 32.30 [Travel Time] Benefit/Cost (20%) 5.88	Percent: 15% Points:	Percent: 15% Points:
Totals: Weight: 70% Weighted Score: 30.08		

Division Needs Total Score: 0

Quantitative Score	Division Engineer Local Input Points	MPO/RPO Local Input Points
Congestion (V/C) (20%) 77.25 Safety (20%) 83.30 Multimodal + [Freight & Military] (10%) 32.30	Percent: 25% Points:	Percent: 25% Points:
Totals: Weight: 50% Weighted Score: 35.34		

Project Data ***Existing Conditions**

Existing Cross-Section:	
Speed Limit:	54
Length (miles);	2.86
Facility Type:	Arterial
Access Control:	Limited
Functional Classification:	Other Principal Arterial
Terrain Type:	Level
Lane Width:	12
Paved Shoulder Width:	4
Roadway has Curb & Gutter?	No
Volume (AADT):	40543.6
Capacity:	39857.24
Volume/Capacity Ratio:	1.02
% Autos:	97%
% Trucks:	3%
Truck Volume:	1373.6
Crash Density:	93.99
Crash Severity:	67.78
Critical Crash Rate:	88.17
Crash Frequency:	0
Severity Index:	0
County Tier Designation:	3
Non-Interstate STRAHNET Route?	Yes
Average Commuting Time:	16
Existing Median Type (for Cost Estimation):	Divided
Pavement Condition Rating:	47
Actual Congested Speed:	7.5
Travel Time Index:	0.95

Project Benefits

Project Cross-Section:	6A - 6 Lane Divided (46' Depressed Median) with Paved Shoulders
Speed Limit:	55
Length (miles):	2.86
Facility Type:	Superstreet
Access Control:	Partial
Functional Classification:	Other Principal Arterial
Terrain Type:	Level
DOT Design Lane Width:	12
DOT Design Paved Shoulder Width:	10
Travel Time Savings for 30 Years (Total):	22211940.48
Travel Time Savings for 30 Years (Autos):	21459410.4
Travel Time Savings for 30 Years (Trucks):	752530.08
Long-Term Employment:	328
% Change in Economy:	0.00044866
Provides Direct Connection to Transportation Terminal?	No
Does project upgrade how the roadway functions?	Yes
In CTP or LRTP?	No
CTP/LRTP Name:	
CTP/LRTP Completion Year:	
Submitted by:	Division 3

* Data reflects calculations which include weighted averages (where applicable) and represent raw output from the Department's SPOT On!ine tool and associated databases.

Project Ownership

Division

Division	Percent	Regional Impact	Division Needs
Division 3	100%	0	0
	0%	0	0
	0%	0	0
TOTAL Division Points		0	0

MPO/RPO

MPO/RPO	Percent	Regional Impact	Division Needs
Wilmington Urban Area MPO	100%	0	0
	0%	0	0
	0%	0	0
TOTAL MPO/RPO Points		0	0

Project Cost and Source

Construction Cost:	\$62,700,000	TIP Unit
Right-of-Way Cost:	\$19,208,000	Cost Estimation Tool
Utilities Cost:	\$2,305,000	Cost Estimation Tool
Total Project Cost:	\$84,213,000	
Other Funding:	\$0	None
Cost to NCDOT :	\$84,213,000	