



NCDOT Prioritization 3.0 Project Summary

SPOT ID: H090882

Mode: Highway

Status: Submitted

SR-1207 (McNair Road)

From/Cross Street: US 64

Specific Improvement Type: 1 - Widen Existing Roadway

To: US 64 Alternate

Project Category: Division Needs

Length: 2.99

TIP#: -

Fully Funded in Draft STIP? No

Cost to NCDOT: \$16,077,000

Description:


Widen McNair Road to Three (3) Lanes from US64 to US 64 Alternate in Edgecombe County.

Division(s): Division 4

County(s): EDGECOMBE

MPOS(s)/RPO(s): Upper Coastal Plain RPO

Project Location

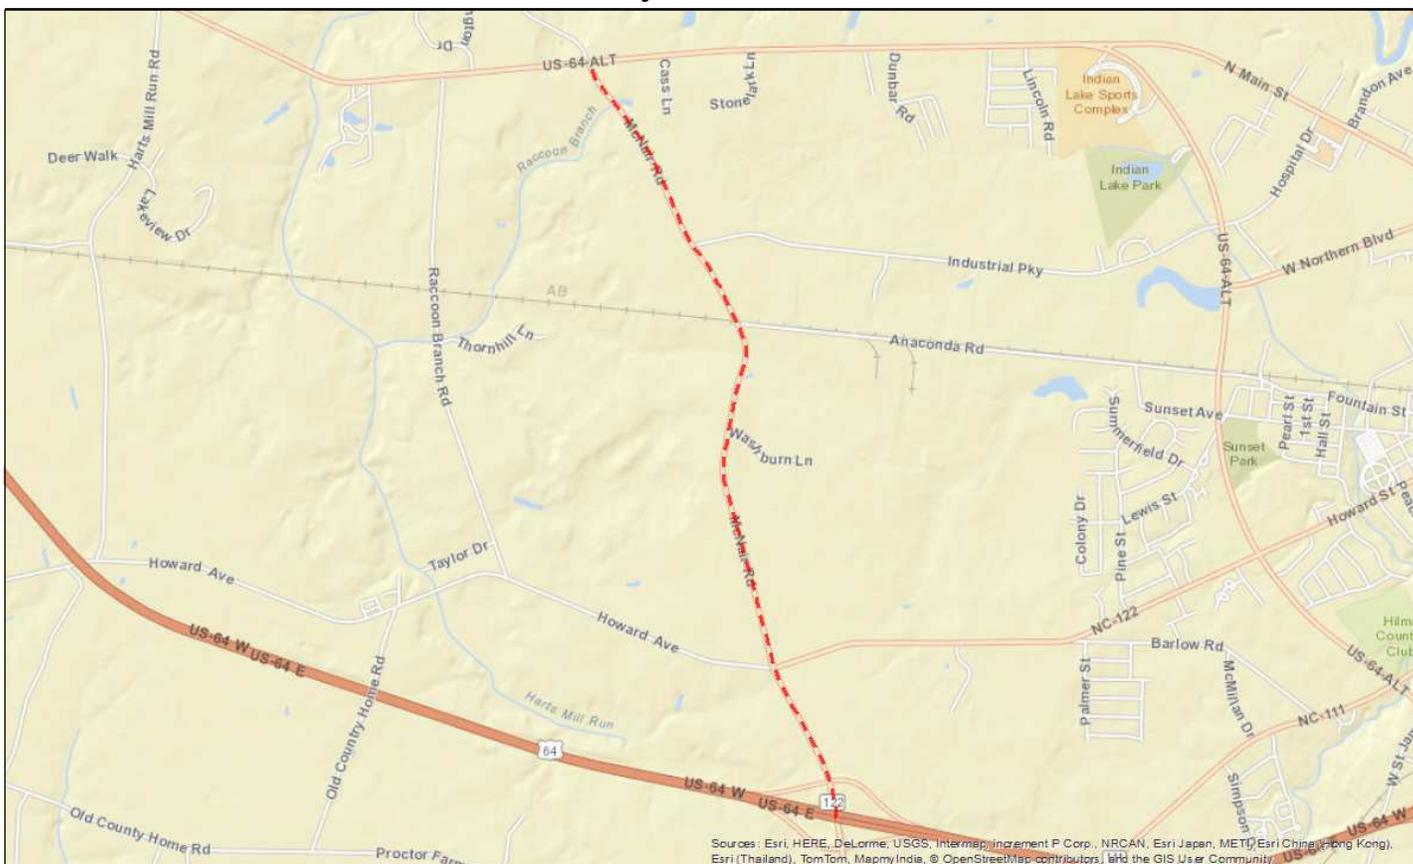

Sources: Esri, HERE, DeLorme, USGS, Intermap, Ingeopartner P Corp., NRCAN, Esri Japan, METI, Esri China (Hong Kong), Esri (Thailand), TomTom, MapmyIndia, © OpenStreetMap contributors, and the GIS User Community

Statewide Mobility Total Score: 0

Quantitative Score	Division Engineer Local Input Points	MPO/RPO Local Input Points
	N/A	N/A
Totals: Weight: 0% Weighted Score: 0		

Regional Impact Total Score: 0

Quantitative Score	Division Engineer Local Input Points	MPO/RPO Local Input Points
	Percent: 15% Points: 0	Percent: 15% Points: 0
Totals: Weight: 0% Weighted Score: 0		

Division Needs Total Score: 31.9

Quantitative Score	Division Engineer Local Input Points	MPO/RPO Local Input Points
Congestion (V/C) (10%) 9.57	Percent: 25% Points: 0	Percent: 25% Points: 100
Safety (10%) 9.46		
Lane Width (10%) 50.00		
[Paved] Shoulder Width (10%) 0.00		
[Travel Time] Benefit/Cost (10%) 0.00		
Totals: Weight: 50% Weighted Score: 6.9		

Project Data ***Existing Conditions**

Existing Cross-Section:	
Speed Limit:	53
Length (miles):	2.99
Facility Type:	Two Lane Highway
Access Control:	None
Functional Classification:	Minor Arterial
Terrain Type:	Level
Lane Width:	10
Paved Shoulder Width:	0
Roadway has Curb & Gutter?	No
Volume (AADT):	2248.48
Capacity:	15563.99
Volume/Capacity Ratio:	0.14
% Autos:	97%
% Trucks:	3%
Truck Volume:	66.69
Crash Density:	8.46
Crash Severity:	18.1
Critical Crash Rate:	1.82
Crash Frequency:	0
Severity Index:	0
County Tier Designation:	1
Non-Interstate STRAHNET Route?	No
Average Commuting Time:	19
Existing Median Type (for Cost Estimation):	Undivided
Pavement Condition Rating:	99
Actual Congested Speed:	0
Travel Time Index:	

Project Benefits

Project Cross-Section:	3B - 2 Lane with Two Way Left Turn Lane, Curb & Gutter, and Sidewalks
Speed Limit:	45
Length (miles):	2.99
Facility Type:	Arterial
Access Control:	None
Functional Classification:	Minor Arterial
Terrain Type:	Level
DOT Design Lane Width:	12
DOT Design Paved Shoulder Width:	0
Travel Time Savings for 30 Years (Total):	-954158.53
Travel Time Savings for 30 Years (Autos):	-925857.06
Travel Time Savings for 30 Years (Trucks):	-28301.47
Long-Term Employment:	
% Change in Economy:	
Provides Direct Connection to Transportation Terminal?	No
Does project upgrade how the roadway functions?	No
In CTP or LRTP?	No
CTP/LRTP Name:	
CTP/LRTP Completion Year:	
Submitted by:	Division 4

* Data reflects calculations which include weighted averages (where applicable) and represent raw output from the Department's SPOT On!ine tool and associated databases.

Project Ownership

Division

Division	Percent	Regional Impact	Division Needs
Division 4	100%	0	0
	0%	0	0
	0%	0	0
TOTAL Division Points		0	0

MPO/RPO

MPO/RPO	Percent	Regional Impact	Division Needs
Upper Coastal Plain RPO	100%	0	100
	0%	0	0
	0%	0	0
TOTAL MPO/RPO Points		0	100

Project Cost and Source

Construction Cost:	\$15,504,000	TIP Unit
Right-of-Way Cost:	\$512,000	Cost Estimation Tool
Utilities Cost:	\$61,000	Cost Estimation Tool
Total Project Cost:	\$16,077,000	
Other Funding:	\$0	None
Cost to NCDOT :	\$16,077,000	