



NCDOT Prioritization 3.0 Project Summary

SPOT ID: H140475

Mode: Highway

Status: Submitted

SR-1003 (Rolesville Road)

From/Cross Street: US 64/264

Specific Improvement Type: 1 - Widen Existing Roadway

To: SR 2234 (Mark's Creek Road)

Project Category: Division Needs

Length: 2.48

TIP#:

Fully Funded in Draft STIP? No

Cost to NCDOT: \$24,308,000

Description:


Widen existing roadway from 2 to 4 lanes.

Division(s): Division 5

County(s): WAKE

MPOS(s)/RPO(s): Capital Area MPO

Project Location

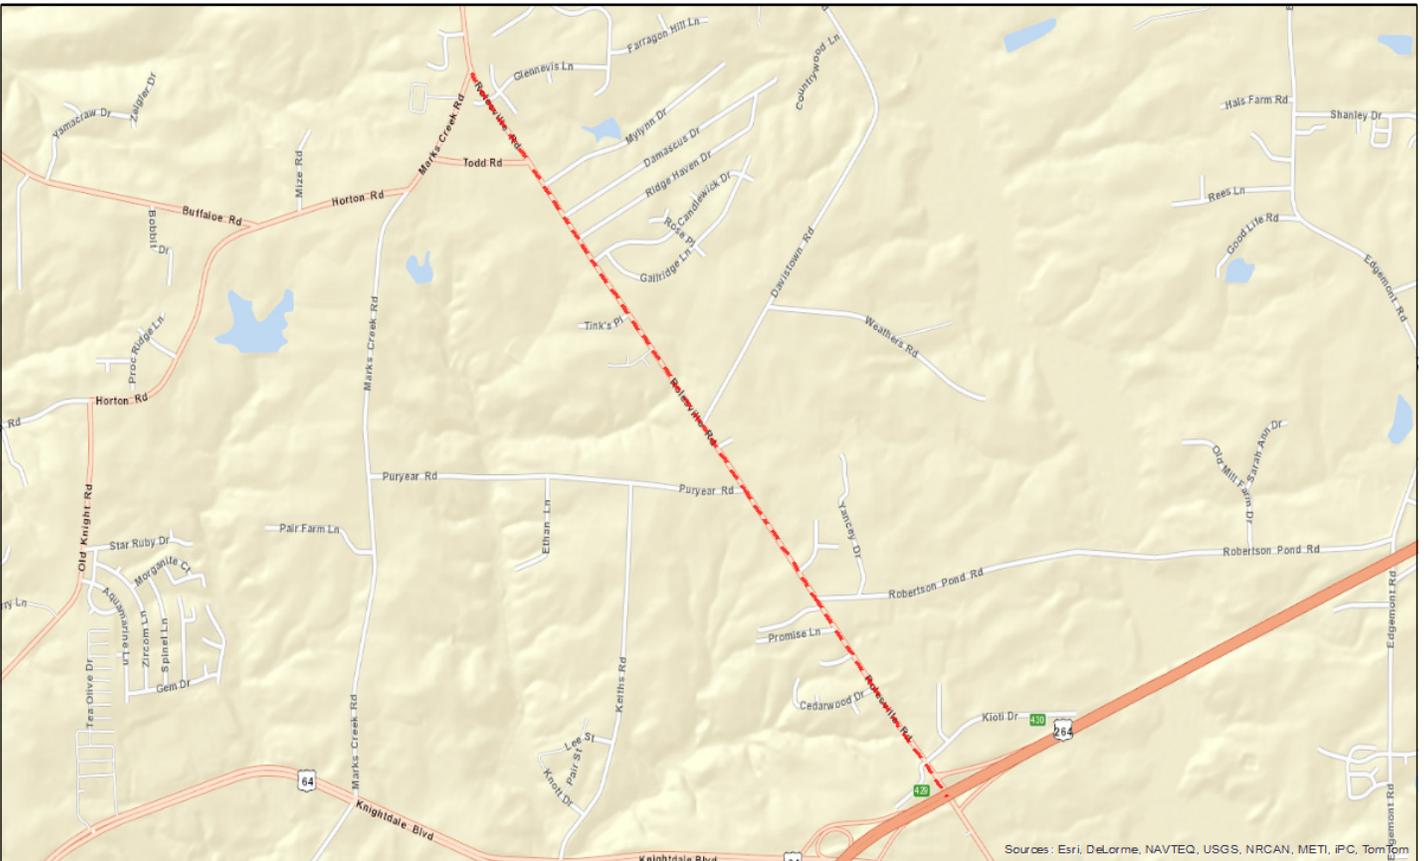

Statewide Mobility Total Score: 0

Quantitative Score	Division Engineer Local Input Points	MPO/RPO Local Input Points
	N/A	N/A
Totals: Weight: 0% Weighted Score: 0		

Regional Impact Total Score: 0

Quantitative Score	Division Engineer Local Input Points	MPO/RPO Local Input Points
	Percent: 15% Points:	Percent: 15% Points:
Totals: Weight: 0% Weighted Score: 0		

Division Needs Total Score: 0

Quantitative Score	Division Engineer Local Input Points	MPO/RPO Local Input Points
Congestion (V/C) (20%) 10.49	Percent: 25% Points:	Percent: 25% Points:
Safety (10%) 61.22		
[Travel Time] Benefit/Cost (20%) 0.00		
Totals: Weight: 50% Weighted Score: 8.22		

Project Data ***Existing Conditions**

Existing Cross-Section:	
Speed Limit:	45
Length (miles):	2.48
Facility Type:	Arterial
Access Control:	None
Functional Classification:	Minor Arterial
Terrain Type:	Rolling
Lane Width:	10
Paved Shoulder Width:	0
Roadway has Curb & Gutter?	No
Volume (AADT):	2999.96
Capacity:	19379.01
Volume/Capacity Ratio:	0.15
% Autos:	100%
% Trucks:	0%
Truck Volume:	0
Crash Density:	79.67
Crash Severity:	55.35
Critical Crash Rate:	48.67
Crash Frequency:	0
Severity Index:	0
County Tier Designation:	3
Non-Interstate STRAHNET Route?	No
Average Commuting Time:	29
Existing Median Type (for Cost Estimation):	Undivided
Pavement Condition Rating:	85
Actual Congested Speed:	39.05
Travel Time Index:	1.15

Project Benefits

Project Cross-Section:	4B - 4 Lane Divided (23' Raised Median) with Paved Shoulders and Sidewalks
Speed Limit:	45
Length (miles):	2.48
Facility Type:	Arterial
Access Control:	None
Functional Classification:	Minor Arterial
Terrain Type:	Rolling
DOT Design Lane Width:	12
DOT Design Paved Shoulder Width:	0
Travel Time Savings for 30 Years (Total):	0
Travel Time Savings for 30 Years (Autos):	0
Travel Time Savings for 30 Years (Trucks):	0
Long-Term Employment:	
% Change in Economy:	
Provides Direct Connection to Transportation Terminal?	No
Does project upgrade how the roadway functions?	No
In CTP or LRTP?	Yes
CTP/LRTP Name:	CAMPO 2040 MTP
CTP/LRTP Completion Year:	2013
Submitted by:	Capital Area MPO

* Data reflects calculations which include weighted averages (where applicable) and represent raw output from the Department's SPOT On!ine tool and associated databases.

Project Ownership**Division**

Division	Percent	Regional Impact	Division Needs
Division 5	100%	0	0
	0%	0	0
	0%	0	0
TOTAL Division Points		0	0

MPO/RPO

MPO/RPO	Percent	Regional Impact	Division Needs
Capital Area MPO	100%	0	0
	0%	0	0
	0%	0	0
TOTAL MPO/RPO Points		0	0

Project Cost and Source

Construction Cost:	\$18,805,000	Cost Estimation Tool
Right-of-Way Cost:	\$4,913,000	Cost Estimation Tool
Utilities Cost:	\$590,000	Cost Estimation Tool
Total Project Cost:	\$24,308,000	
Other Funding:	\$0	None
Cost to NCDOT :	\$24,308,000	