



NCDOT Prioritization 3.0 Project Summary

SPOT ID: H141273

Mode: Highway

Status: Submitted

NC-218 (NC 218)

From/Cross Street: SR 1002 (New Home Church Road)

Specific Improvement Type: 10 - Improve Intersection

To:

Project Category: Regional Impact

Length: 0.5

TIP#:

Fully Funded in Draft STIP? No

Cost to NCDOT: \$1,395,000

Description:


Construct turn lanes on NC 218 at SR 1002

Division(s): Division 10

County(s): ANSON

MPOS(s)/RPO(s): Rocky River RPO

Project Location

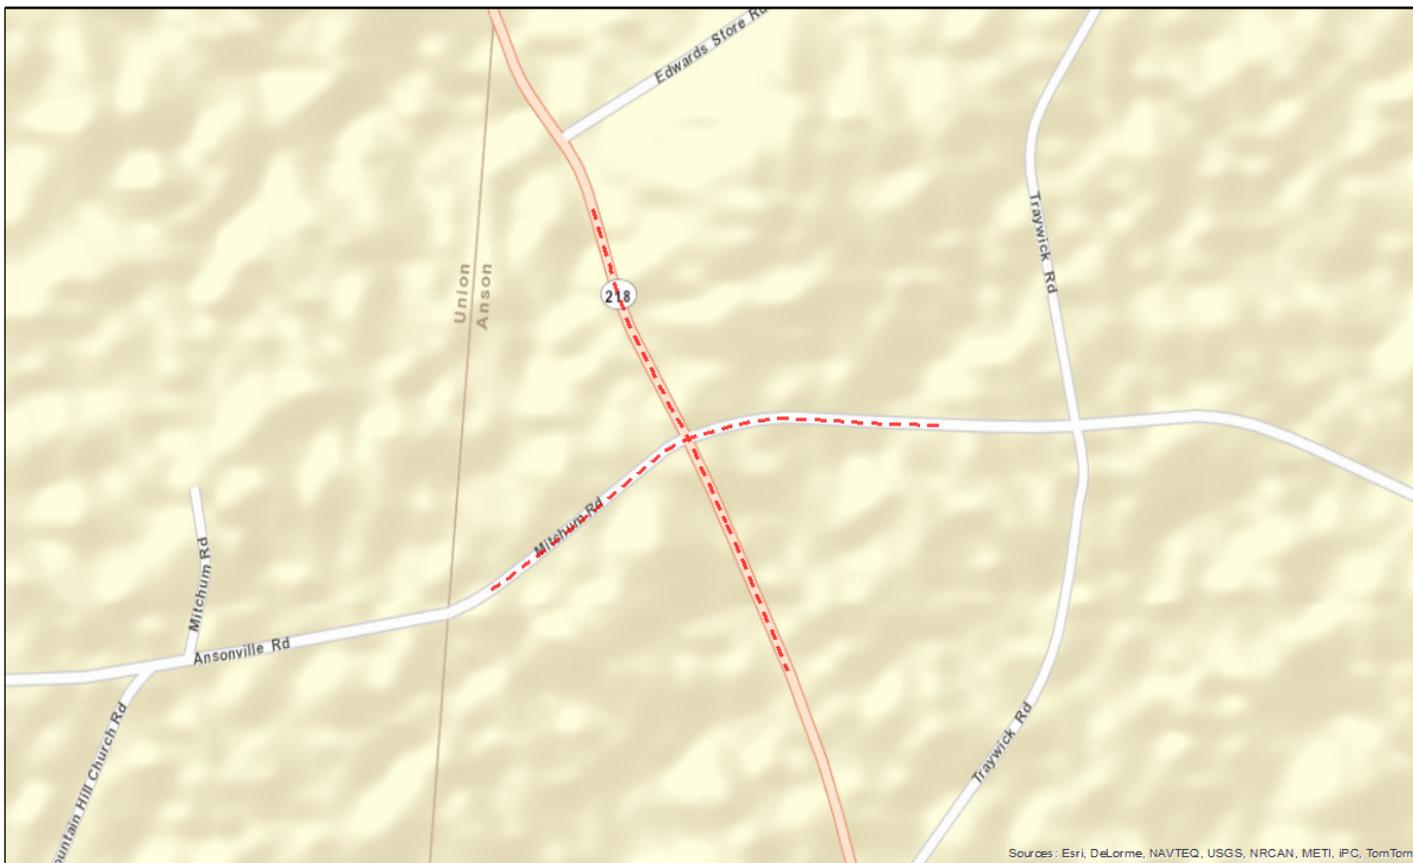

Sources : Esri, DeLorme, NAVTEQ, USGS, NRCAN, METI, IPC, TomTom

Statewide Mobility Total Score: 0

Quantitative Score	Division Engineer Local Input Points	MPO/RPO Local Input Points
	N/A	N/A
Totals: Weight: 0% Weighted Score: 0		

Regional Impact Total Score: 0

Quantitative Score	Division Engineer Local Input Points	MPO/RPO Local Input Points
Accessibility / Connectivity (10%) 23.92	Percent: 15% Points:	Percent: 15% Points:
Congestion (V/C) (25%) 13.82		
Safety (10%) 33.35		
[Travel Time] Benefit/Cost (25%) 0.18		
Totals: Weight: 70% Weighted Score: 9.23		

Division Needs Total Score: 0

Quantitative Score	Division Engineer Local Input Points	MPO/RPO Local Input Points
Congestion (V/C) (20%) 13.82	Percent: 25% Points:	Percent: 25% Points:
Safety (10%) 33.35		
[Travel Time] Benefit/Cost (20%) 0.18		
Totals: Weight: 50% Weighted Score: 6.14		

Project Data ***Existing Conditions**

Existing Cross-Section:	
Speed Limit:	55
Length (miles);	0.5
Facility Type:	Two Lane Highway
Access Control:	None
Functional Classification:	Major Collector
Terrain Type:	Rolling
Lane Width:	11
Paved Shoulder Width:	0
Roadway has Curb & Gutter?	No
Volume (AADT):	5916.01
Capacity:	31000
Volume/Capacity Ratio:	0.19
% Autos:	84%
% Trucks:	16%
Truck Volume:	942.49
Crash Density:	0
Crash Severity:	0
Critical Crash Rate:	0
Crash Frequency:	0
Severity Index:	66.7
County Tier Designation:	1
Non-Interstate STRAHNET Route?	No
Average Commuting Time:	29
Existing Median Type (for Cost Estimation):	Undivided
Pavement Condition Rating:	0
Actual Congested Speed:	46.68
Travel Time Index:	1.18

Project Benefits

Project Cross-Section:	
Speed Limit:	55
Length (miles):	0.5
Facility Type:	Two Lane Highway
Access Control:	None
Functional Classification:	Major Collector
TerrainType:	Rolling
DOT Design Lane Width:	12
DOT Design Paved Shoulder Width:	0
Travel Time Savings for 30 Years (Total):	11000
Travel Time Savings for 30 Years (Autos):	9247.57
Travel Time Savings for 30 Years (Trucks):	1752.43
Long-Term Employment:	
% Change in Economy:	
Provides Direct Connection to Transportation Terminal?	No
Does project upgrade how the roadway functions?	No
In CTP or LRTP?	No
CTP/LRTP Name:	
CTP/LRTP Completion Year:	
Submitted by:	Rocky River RPO

* Data reflects calculations which include weighted averages (where applicable) and represent raw output from the Department's SPOT On!ine tool and associated databases.

Project Ownership

Division

Division	Percent	Regional Impact	Division Needs
Division 10	100%	0	0
	0%	0	0
	0%	0	0
TOTAL Division Points		0	0

MPO/RPO

MPO/RPO	Percent	Regional Impact	Division Needs
Rocky River RPO	100%	0	0
	0%	0	0
	0%	0	0
TOTAL MPO/RPO Points		0	0

Project Cost and Source

Construction Cost:	\$1,125,000	Cost Estimation Tool
Right-of-Way Cost:	\$270,000	Cost Estimation Tool
Utilities Cost:	\$0	Cost Estimation Tool
Total Project Cost:	\$1,395,000	
Other Funding:	\$0	None
Cost to NCDOT :	\$1,395,000	