
Video Inspection Equipment/Process Highlights

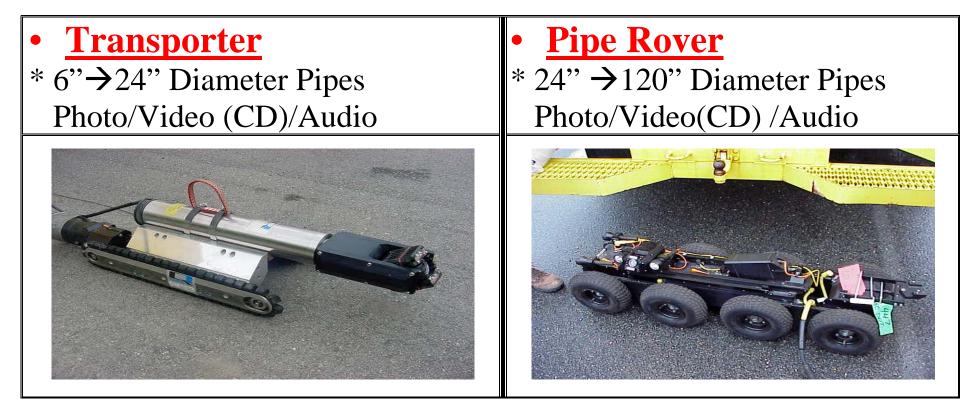

CONSIDERATIONS:

- Traffic Control Arrangement is needed when Equipment Entry Points are close or on the roadway
- Video Equipment can inspect pipes approximately 1,100 LF in length
- Pipe Condition (presence of silt deposit, debris, or murky water) is critical to the success of the inspection. Pipe cleaning and/or drainage may be necessary.
- Access (availability/location) to Entry Points for Inspection Equipment is critical
- Video Equipment can run under water, however the clarity of the image is not at best