

\*\*\*\*\*SYSTEM\*\*\*\*\*  
 \*\*\*\*\*PROJECT\*\*\*\*\*  
 \*\*\*\*\*DRAWING\*\*\*\*\*


F.A. PROJECT NO. \_\_\_\_\_

NOTES

ASSUMED LIVE LOAD -----MS18 OR ALTERNATE LOADING.  
 DESIGN FILL-----  
 FOR OTHER DESIGN DATA AND NOTES SEE STANDARD NOTE SHEET.  
 76mm Ø WEEP HOLES INDICATED TO BE IN ACCORDANCE WITH THE SPECIFICATIONS.  
 CONCRETE IN CULVERTS TO BE POURED IN THE FOLLOWING ORDER:  
 1. WING FOOTINGS AND FLOOR SLAB INCLUDING 100mm OF ALL VERTICAL WALLS.  
 2. THE REMAINING PORTIONS OF THE WALLS AND WINGS FULL HEIGHT FOLLOWED BY ROOF SLAB AND HEADWALLS.  
 THE RESIDENT ENGINEER SHALL CHECK THE LENGTH OF CULVERT BEFORE STAKING IT OUT TO MAKE CERTAIN THAT IT WILL PROPERLY TAKE CARE OF THE FILL.  
 THIS BARREL STANDARD TO BE USED ONLY ON CULVERTS ON 90° SKEW AND TO BE USED WITH STANDARD WING SHEET WITH THE SAME SKEW AND VERTICAL CLEARANCE.  
 DIMENSIONS FOR WING LAYOUT AS WELL AS ADDITIONAL REINFORCING STEEL EMBEDDED IN BARREL ARE SHOWN ON WING SHEET.  
 TRANSVERSE CONSTRUCTION JOINTS SHALL BE USED IN THE BARREL, SPACED TO LIMIT THE POURS TO A MAXIMUM OF 21.0m. LOCATION OF JOINTS SHALL BE SUBJECT TO APPROVAL OF THE ENGINEER.  
 STEEL IN THE BOTTOM SLAB MAY BE SPICED AT THE PERMITTED CONSTRUCTION JOINT AT THE CONTRACTOR'S OPTION. EXTRA WEIGHT OF STEEL DUE TO THE SPICES SHALL BE PAID FOR BY THE CONTRACTOR.  
 AT THE CONTRACTOR'S OPTION, HE MAY SPlice THE VERTICAL REINFORCING STEEL IN THE INTERIOR FACE OF EXTERIOR WALL AND BOTH FACES OF INTERIOR WALLS ABOVE LOWER WALL CONSTRUCTION JOINT. THE SPlice LENGTH SHALL BE AS PROVIDED IN THE SPlice LENGTH CHART SHOWN ON THE PLANS. EXTRA WEIGHT OF STEEL DUE TO THE SPICES SHALL BE PAID FOR BY THE CONTRACTOR.  
 AT THE CONTRACTOR'S OPTION HE MAY SUBMIT, TO THE ENGINEER FOR APPROVAL, DESIGN AND DETAIL DRAWINGS FOR A PRECAST REINFORCED CONCRETE BOX CULVERT IN LIEU OF THE CAST-IN-PLACE CULVERT SHOWN ON THE PLANS. THE DESIGN SHALL PROVIDE THE SAME SIZE AND NUMBER OF BARRELS AS USED ON THE CAST-IN-PLACE DESIGN. FOR OPTIONAL PRECAST REINFORCED CONCRETE BOX CULVERT, SEE SPECIAL PROVISIONS.

LOCATION SKETCH

TOTAL STRUCTURE QUANTITIES	
CLASS A CONCRETE	
BARREL @ _____ m <sup>3</sup> /m _____ m <sup>3</sup>	
WINGS ETC. _____ m <sup>3</sup>	
TOTAL _____ m <sup>3</sup>	
REINFORCING STEEL	
BARREL _____ kg	
WINGS ETC. _____ kg	
TOTAL _____ kg	
CULVERT EXCAVATION ----- LUMP SUM	
FOUNDATION COND. MAT'L ---- METRIC TONS	



BAR TYPE  
 DIMENSIONS ARE OUT TO OUT

PROJECT NO. \_\_\_\_\_  
 \_\_\_\_\_ COUNTY  
 STATION: \_\_\_\_\_

SHEET 1 OF 2

PROFILE ALONG C<sub>L</sub> CULVERT





STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH

BARREL STANDARD  
 DOUBLE \_\_\_\_\_ m X \_\_\_\_\_ m  
 CONCRETE BOX CULVERT  
 90° SKEW

REVISIONS						SHEET NO.
NO.	BY	DATE	NO.	BY	DATE	TOTAL SHEETS
1			3			
2			4			

ASSEMBLED BY :	DATE :
CHECKED BY :	DATE :
DRAWN BY : EEM 6/97	-----
CHECKED BY : ARB 7/97	-----

\*\*\*\*\*SYTIME\*\*\*\*\*  
 \*\*\*\*\*USERNAME\*\*\*\*\*

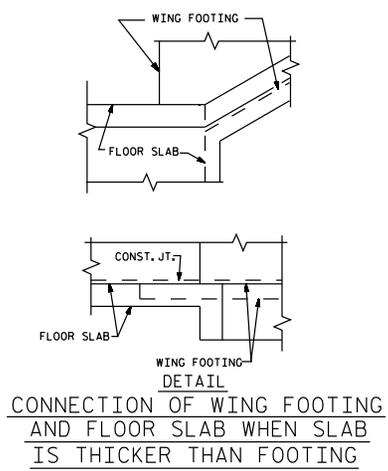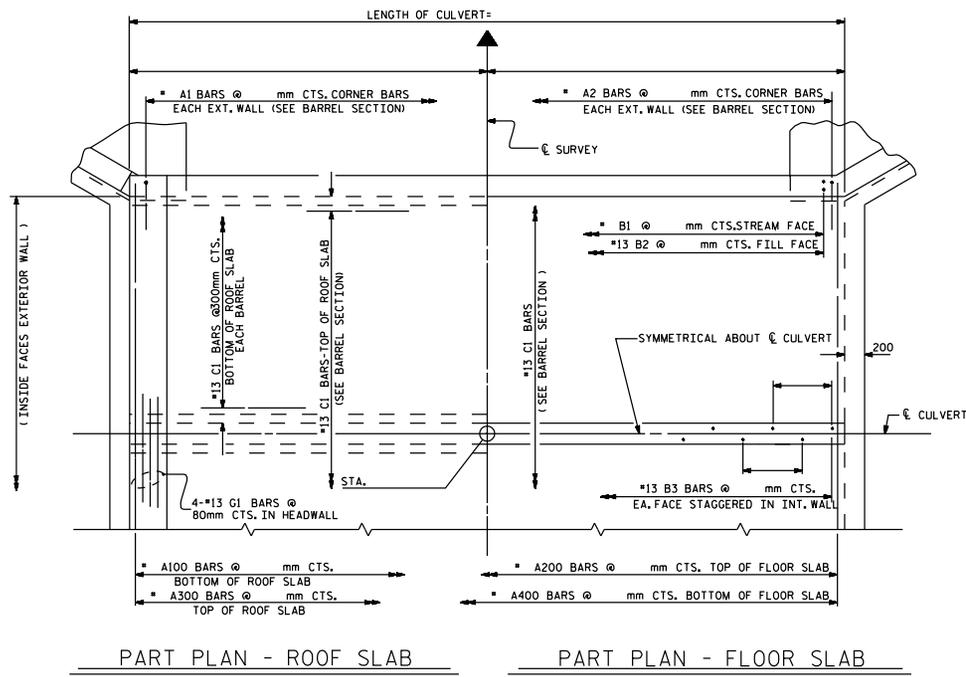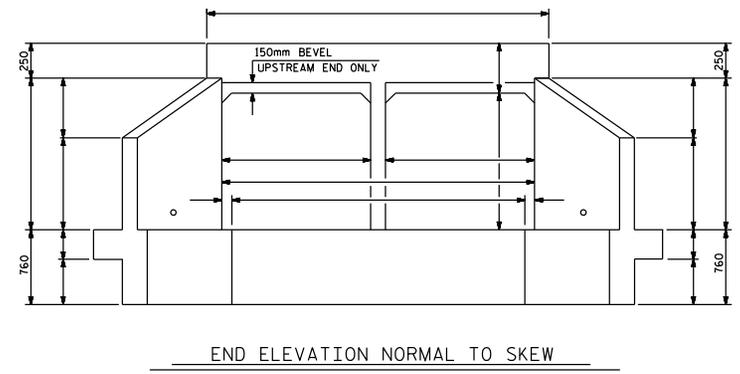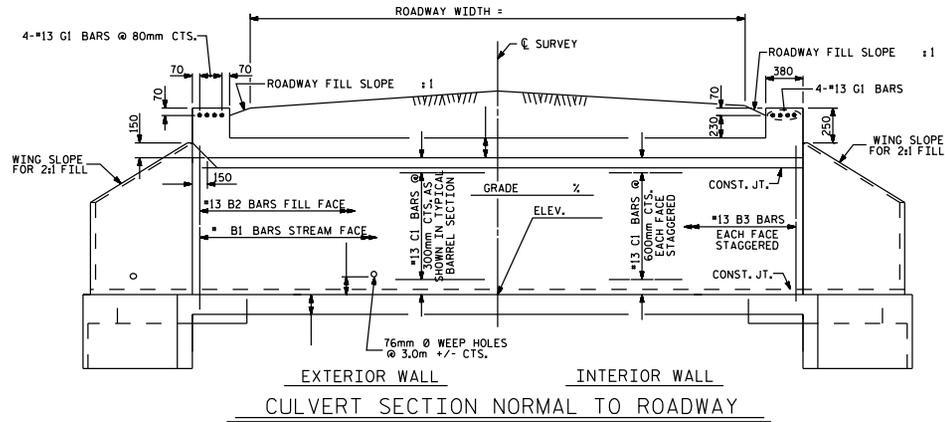

PROJECT NO. \_\_\_\_\_  
 \_\_\_\_\_ COUNTY  
 STATION: \_\_\_\_\_  
 SHEET 2 OF 2

STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH  
 BARREL STANDARD  
 DOUBLE \_\_\_\_\_ m X \_\_\_\_\_ m  
 CONCRETE BOX CULVERT  
 90° SKEW

ASSEMBLED BY : \_\_\_\_\_ DATE : \_\_\_\_\_  
 CHECKED BY : \_\_\_\_\_ DATE : \_\_\_\_\_  
 DRAWN BY : EEM 6/97  
 CHECKED BY : ARB 7/97

REVISIONS				SHEET NO.	
NO.	BY	DATE	NO.	BY	DATE
1			3		
2			4		

TOTAL SHEETS

STD. No. CB290sm