Docusign Envelope ID: A70F72C6-74EE-4EF7-A71E-AAE0A990B356

11/14/23

TYPE "E" SIGNS

401 QUANTITY REQ'D 3

30" X 30"
W2-6

ONE "U" POST PER SIGN

406 QUANTITY REQ'D 3

24" X 30"
R4-7

ONE "U" POST PER SIGN

402 QUANTITY REQ'D 2

30" X 30"
W11-8

ONE "U" POST PER SIGN

407 QUANTITY REQ'D 3



18" X 18"
OM1-3

MOUNT BELOW SIGN 406 IN
3 INSTALLATIONS

403 QUANTITY REQ'D 3

30" X 30"
W3-2

ONE "U" POST PER SIGN

408 QUANTITY REQ'D 2

30" X 14"
W3-2

MOUNT BELOW SIGN 401 IN
2 INSTALLATIONS

SEE SHEET SIGN-2A
FOR SIGN DESIGN

404 QUANTITY REQ'D 3

36" X 36" X 36"
R1-2

ONE "U" POST PER SIGN

405 QUANTITY REQ'D 3

30" X 30"
R6-5P

MOUNT BELOW SIGN 404 IN
3 INSTALLATIONS

TYPE "F" SIGNS

501

24" X 12"
M3-3P

30" X 24"
M1-4

21" X 15"
M6-3P

ONE "U" POST PER SIGN

504

24" X 12"
M3-1P

30" X 24"
M1-4

21" X 15"
M6-3P

ONE "U" POST PER SIGN

507

24" X 24"
D9-3

21" X 15"
M5-3P

MOUNT BELOW SIGN 302 IN
1 INSTALLATION

502

18" X 24"
M1-8

12" X 9"
M5-3P

ONE "U" POST PER SIGN

505

24" X 12"
M3-1P

30" X 24"
M1-4

21" X 15"
M6-2P

ONE "U" POST PER SIGN

508

24" X 24"
D9-7

21" X 15"
M6-1P

MOUNT BELOW SIGN 302 IN
1 INSTALLATION

503

24" X 12"
M3-3P

30" X 24"
M1-4

21" X 15"
M6-2P

ONE "U" POST PER SIGN

506

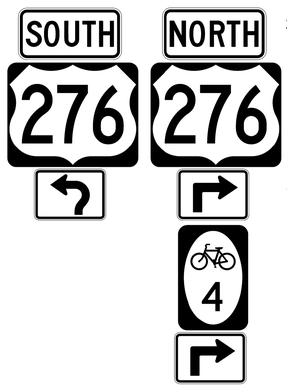

24" X 12" M3-3P	24" X 12" M3-1P
30" X 24" M1-4	30" X 24" M1-4
21" X 15" M5-3P	21" X 15" M5-1P R
	18" X 24" M1-8
	12" X 9" M5-1P R

TWO "U" POSTS PER SIGN

TYPE "E" AND "F" SIGNS

HN-0031
SIGN-3

NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
WAKE COUNTY

PROJECT ENGINEER

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

PREPARED BY

TGS ENGINEERS
706 HILLSBOROUGH ST. SUITE 200
RALEIGH, NC 27603
PH (919) 773-8887
CORP. LICENSE NO.: C-0275