PROJECT REFERENCE NO.	SHEET NO.
W-5202K	2
ROADWAY DESIGN ENGINEER	PAVEMENT DESIGN ENGINEER

NORTH CAROLINA PROFESSIONAL SEAL 11274 ENGINEER BRYCE EDWARD EATMON, JR.
Ed Eatmon 6/5/2015

NORTH CAROLINA PROFESSIONAL SEAL 11274 ENGINEER BRYCE EDWARD EATMON, JR.
Ed Eatmon 6/5/2015

C1	PROP. APPROX. 1.5″ ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ.YD.
D1	PROP. APPROX. 3″ ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.
E1	PROP. APPROX. 5.5″ ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.
T	EARTH MATERIAL.
U	EXISTING PAVEMENT.

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

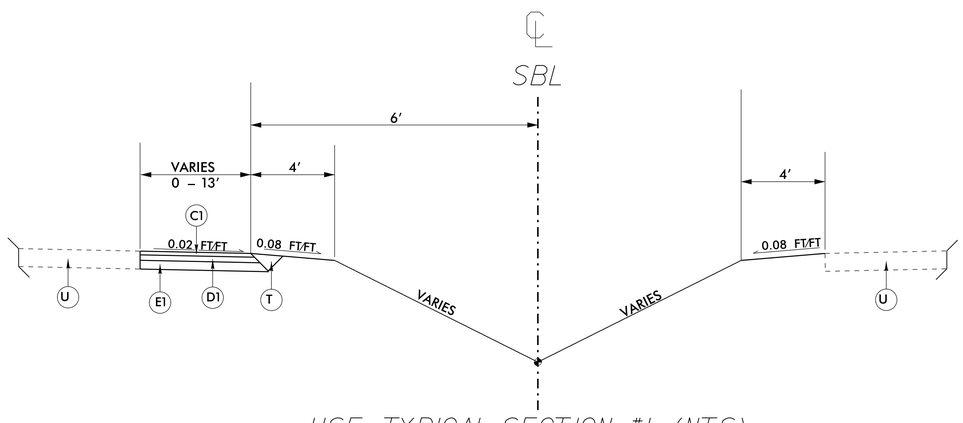

USE TYPICAL SECTION #1 (NTS)

-L- STA 32+97.85 TO STA 36+97.85
-L- STA 42+06.49 TO STA 46+06.49
-L- STA 85+51.69 TO STA 89+51.69
-L- STA 95+56.04 TO STA 99+56.04
-L- STA 119+04.83 TO STA 123+04.83
-L- STA 128+81.78 TO STA 132+81.78
-L- STA 151+50.45 TO STA 155+50.45
-L- STA 177+97.44 TO STA 181+97.44
-L- STA 244+85.02 TO STA 248+85.02
-L- STA 390+12.10 TO STA 394+12.10

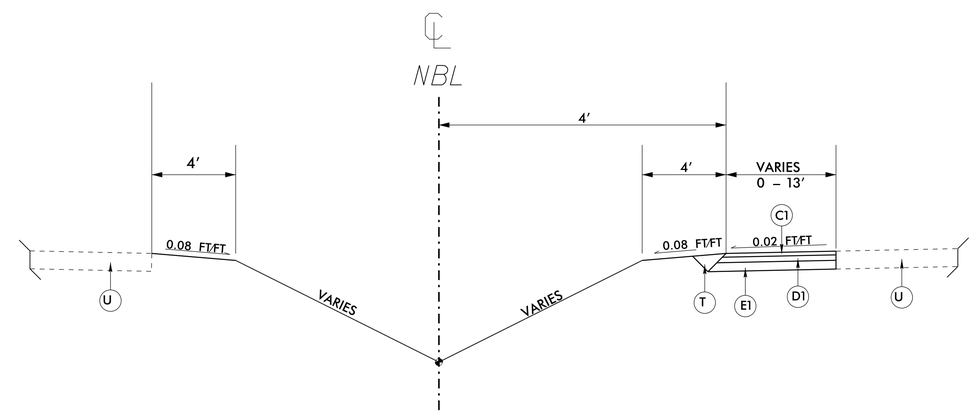

USE TYPICAL SECTION #2 (NTS)

-L- STA 14+57.88 TO STA 18+57.88
-L- STA 21+86.48 TO STA 25+86.48
-L- STA 28+17.71 TO STA 32+17.71
-L- STA 68+96.43 TO STA 72+96.43
-L- STA 90+87.52 TO STA 94+87.52
-L- STA 98+31.51 TO STA 102+31.51
-L- STA 240+19.27 TO STA 244+19.27
-L- STA 276+98.12 TO STA 280+98.12
-L- STA 300+32.16 TO STA 304+32.16
-L- STA 353+87.81 TO STA 357+87.81
-L- STA 385+43.42 TO STA 389+43.41

6/2/99
05-JUN-2015 08:27
G:\2012\12-01\R\NC 11 Median Turn Lanes\W5202K_psh2.dgn
$$$$USERNAME$$$$