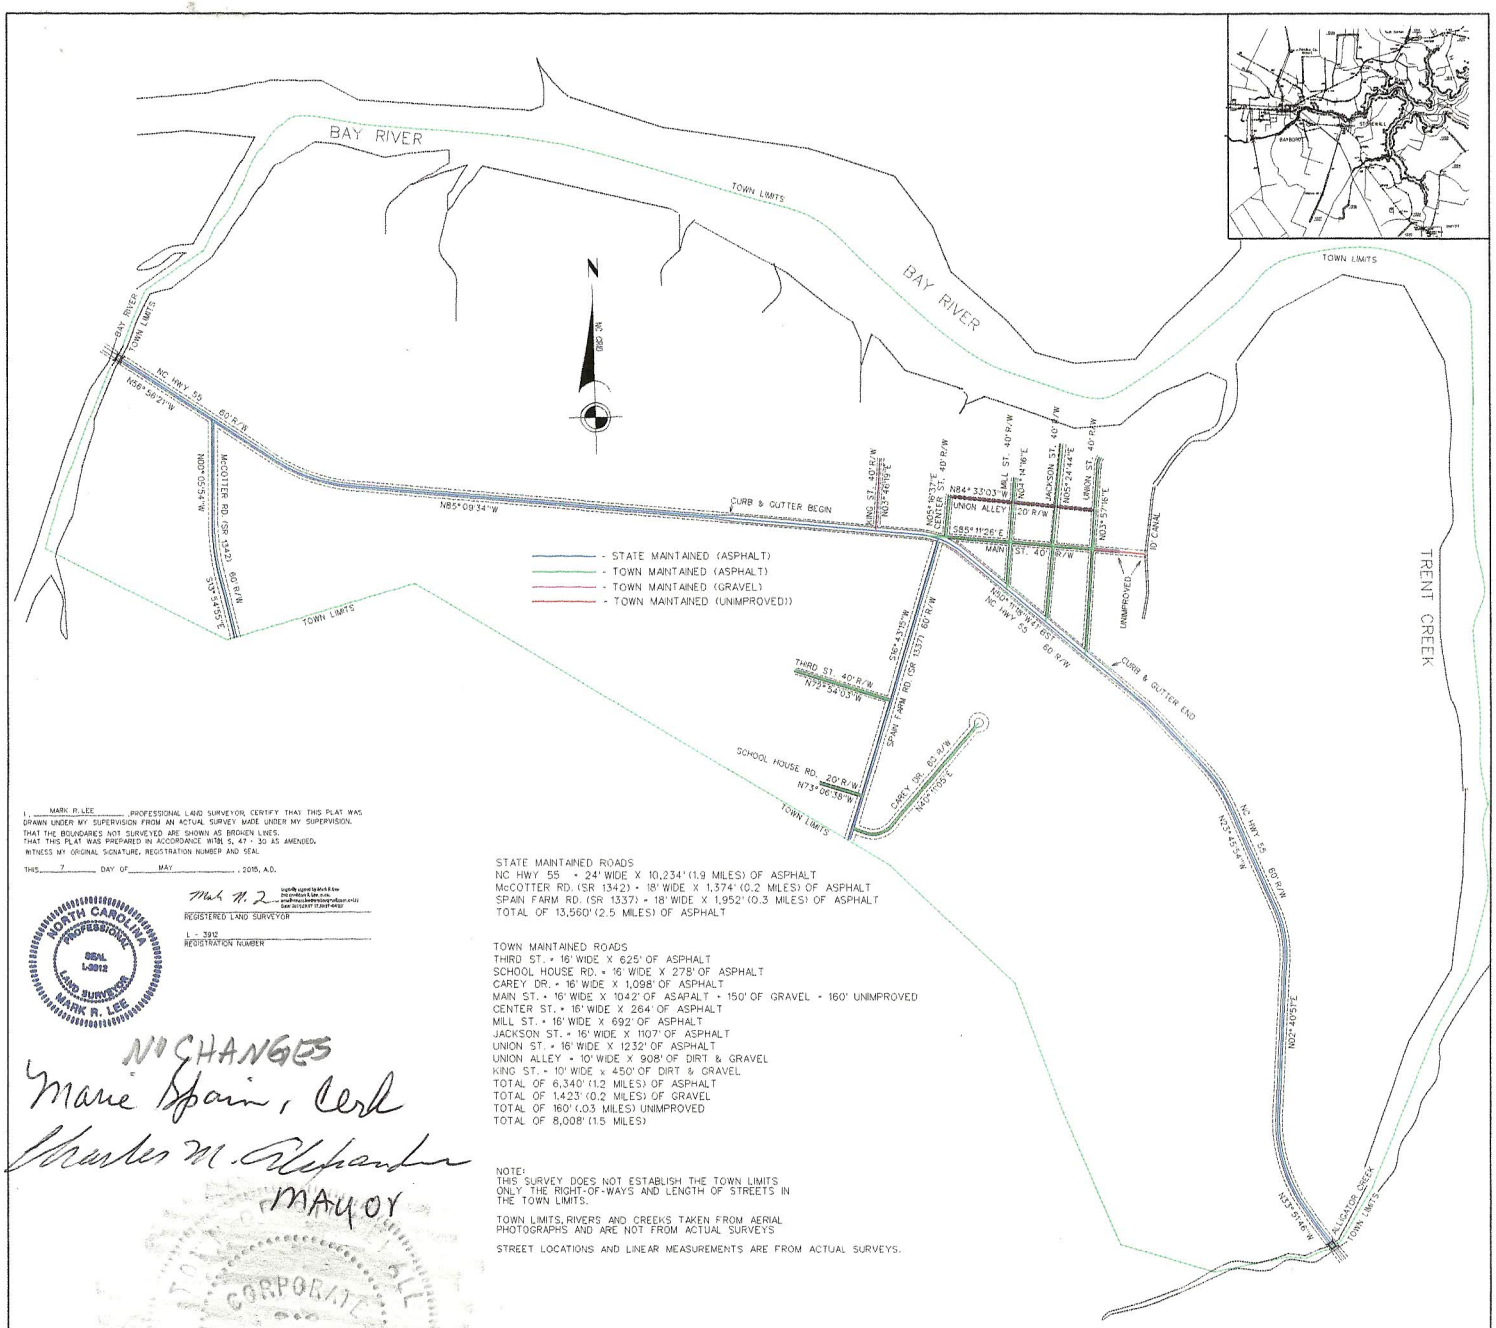

I, MARK R. LEE, PROFESSIONAL LAND SURVEYOR, CERTIFY THAT THIS PLAT WAS DRAWN UNDER MY SUPERVISION FROM AN ACTUAL SURVEY MADE UNDER MY SUPERVISION. THAT THE BOUNDARIES NOT SURVEYED ARE SHOWN AS BROKEN LINES. THAT THIS PLAT WAS PREPARED IN ACCORDANCE WITH S. 47 - 30 AS AMENDED. WITNESS MY ORIGINAL SIGNATURE, REGISTRATION NUMBER AND SEAL

THIS 7 DAY OF MAY, 2015, A.D.

Mark R. Lee
REGISTERED LAND SURVEYOR

L - 3912
REGISTRATION NUMBER

NORTH CAROLINA PROFESSIONAL SEAL L-3912 LAND SURVEYOR MARK R. LEE

NO CHANGES
Marie Spain, Clerk
Charles M. Alexander
MAYOR

CORPORATE SEAL STONEWALL

STATE MAINTAINED ROADS
NC HWY 55 - 24' WIDE X 10,234' (1.9 MILES) OF ASPHALT
McCOTTER RD. (SR 1342) - 18' WIDE X 1,374' (0.2 MILES) OF ASPHALT
SPAIN FARM RD. (SR 1337) - 18' WIDE X 1,952' (0.3 MILES) OF ASPHALT
TOTAL OF 13,560' (2.5 MILES) OF ASPHALT

TOWN MAINTAINED ROADS
THIRD ST. - 16' WIDE X 625' OF ASPHALT
SCHOOL HOUSE RD. - 16' WIDE X 278' OF ASPHALT
CAREY DR. - 16' WIDE X 1,098' OF ASPHALT
MAIN ST. - 16' WIDE X 1042' OF ASAPALT - 150' OF GRAVEL - 160' UNIMPROVED
CENTER ST. - 16' WIDE X 264' OF ASPHALT
MILL ST. - 16' WIDE X 692' OF ASPHALT
JACKSON ST. - 16' WIDE X 1107' OF ASPHALT
UNION ST. - 16' WIDE X 1232' OF ASPHALT
UNION ALLEY - 10' WIDE X 908' OF DIRT & GRAVEL
KING ST. - 10' WIDE x 450' OF DIRT & GRAVEL
TOTAL OF 6,340' (1.2 MILES) OF ASPHALT
TOTAL OF 1,423' (0.2 MILES) OF GRAVEL
TOTAL OF 160' (.03 MILES) UNIMPROVED
TOTAL OF 8,008' (1.5 MILES)

NOTE:
THIS SURVEY DOES NOT ESTABLISH THE TOWN LIMITS ONLY THE RIGHT-OF-WAYS AND LENGTH OF STREETS IN THE TOWN LIMITS.

TOWN LIMITS, RIVERS AND CREEKS TAKEN FROM AERIAL PHOTOGRAPHS AND ARE NOT FROM ACTUAL SURVEYS

STREET LOCATIONS AND LINEAR MEASUREMENTS ARE FROM ACTUAL SURVEYS.

REVISED STREET PLAN FOR

THE TOWN OF STONEWALL

STONEWALL, TOWNSHIP: No. 2, PAMLICO COUNTY, NORTH CAROLINA

400' 200' 0' 400' 800'
SCALE 1" = 400'

DATE: JULY 5, 1999
REVISED DATE: May 7, 2015
PROJECT# 100601

MARK R. LEE
PROFESSIONAL LAND SURVEYOR
239 Lee Court
Grantsboro, NC 28529
TELE. • (252) 249 - 0226
mark.lee@embarqmail.com