


# ANNUAL REPORT FOR 2023

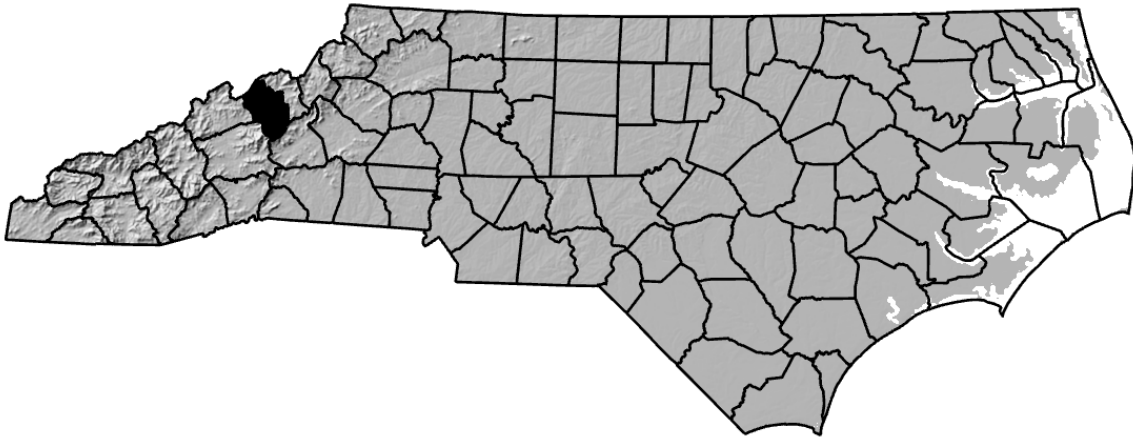

**Long Branch Site #5A Mitigation Site**

**ONE ID #: 100-013**

**Yancey County**

**TIP No. R-2519B**

**COE Action ID: SAW-2004-9987181 / 2004-30631**

**NCDWR Project #: 2013-0743v.2**



Prepared By:  
Roadside Environmental Unit and Environmental Analysis Unit  
North Carolina Department of Transportation  
October 2023

## TABLE OF CONTENTS

SUMMARY .....	1
1.0 INTRODUCTION:.....	2
.1 Project Description .....	2
.2 Purpose .....	2
.3 Project History .....	2
.4 Debit Ledger.....	2
2.0 STREAM ASSESSMENT: .....	7
.1 Success Criteria .....	7
.2 Stream Description .....	8
.2.1 Post Construction Conditions.....	8
.2.2 Monitoring Conditions .....	8
.3 Results of Stream Monitoring .....	8
.3.1 Site Data .....	8
3.0 VEGETATION .....	9
.1 Description of Species.....	9
.2 Results of Vegetation Monitoring.....	9
.3 Conclusions .....	9
4.0 OVERALL CONCLUSIONS/RECOMMENDATIONS .....	9
5.0 REFERENCES: .....	10

## FIGURES

Figure 1 – Site #5A Vicinity Map .....	3
Figure 2 – Site #5A Permit Drawing .....	4
Figure 3 – Site #5A Reforestation Plan .....	5
Figure 4 – Site #5A Map .....	6

## APPENDICES

Appendix A – Site Photographs

## **SUMMARY**

The following report summarizes the stream monitoring activities that have occurred during the Year 2023 at the Long Branch Site #5A mitigation site in Yancey County. This report provides the monitoring results for the fourth formal year of monitoring (Year 2023). The Year 2023 monitoring period was the fourth of five scheduled years of monitoring on the Long Branch Site #5A site (See Success Criteria Section 2.1).

Based on the overall conclusions of monitoring at the Long Branch Site #5A, it has met the required monitoring protocols for the fourth formal year of monitoring on the stream. The channel throughout the stream site is stable at this time with some minor undercutting along the left bank.

NCDOT proposes to continue stream and vegetation monitoring at the Long Branch Site #5A mitigation site in 2024.

## 1.0 INTRODUCTION

### 1.1 Project Description

The following report summarizes the stream monitoring activities that have occurred during the Year 2023 at the Long Branch Site #5A. Site #5A is located on US 19 adjacent to the South Toe River crossing in Yancey County at Sta. 122+00 to 124+00 – L- Lt. (Figure 1). The Long Branch Site #5A was constructed to provide mitigation for stream impacts associated with Transportation Improvement Program (TIP) number R-2519B in Yancey and Mitchell Counties.

The mitigation site provided approximately 148 linear feet of stream relocation. Construction at Long Branch Site #5A involved relocating 148 feet of Long Branch at the confluence with the South Toe River. A new floodplain and channel were excavated. The riparian buffer zone was also planted. The new channel has a 25-foot buffer on the north bank and a 30-foot buffer on the south bank. An existing utility easement impacts 20 feet from top of bank on the left side for the entire relocated channel.

### 1.2 Purpose

In order for a mitigation site to be considered successful, the site must meet the success criteria. This report details the monitoring in 2023 at Long Branch Site #5A. Hydrologic monitoring was not required for this site.

### 1.3 Project History

September 2020	Stream Channel and Vegetation Monitoring (Year 1)
February 2021	Supplemental Planting Completed
July 2021	Stream Channel and Vegetation Monitoring (Year 2)
August 2022	Stream Channel and Vegetation Monitoring (Year 3)
July 2023	Stream Channel and Vegetation Monitoring (Year 4)
September 2023	Herbicide Application on Invasive Species

### 1.4 Debit Ledger

The entire Long Branch Site #5A stream mitigation site was used for the R-2519B project to compensate for unavoidable stream impacts.

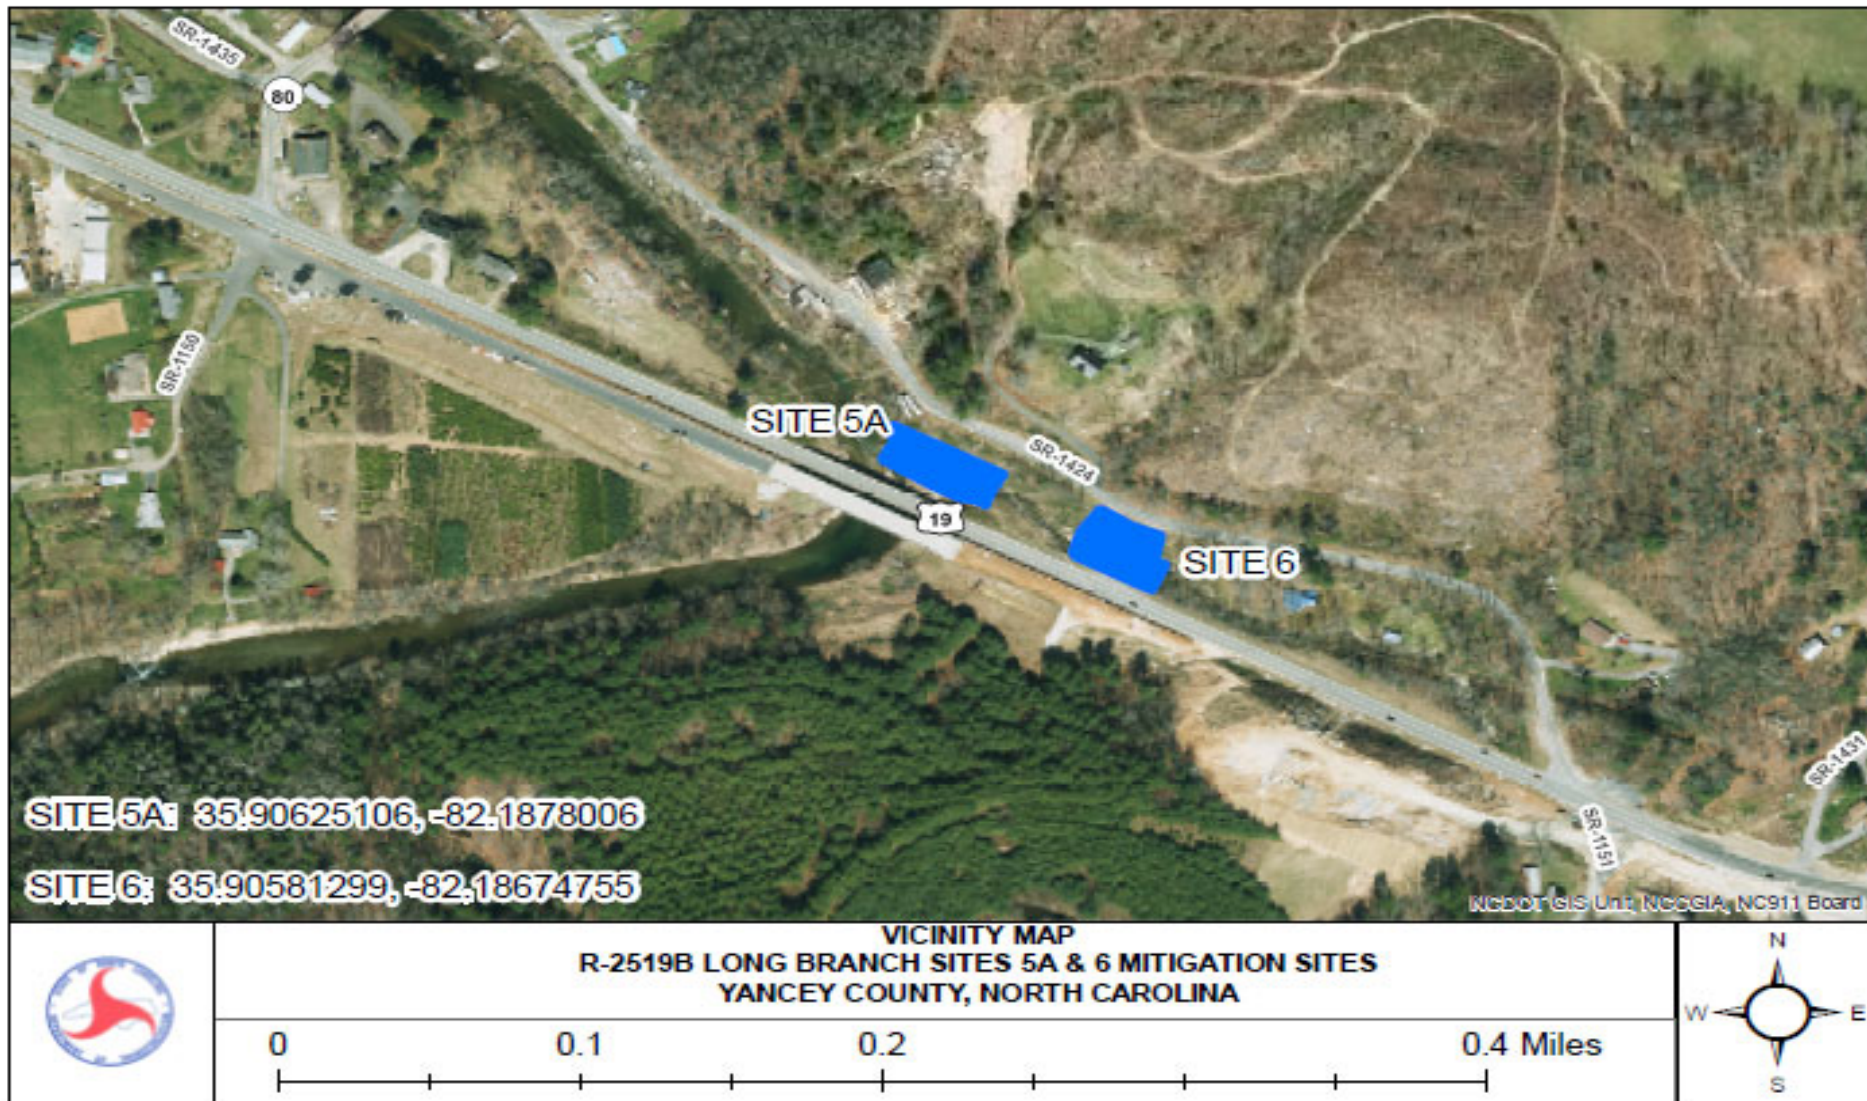


Figure 1. Vicinity Map

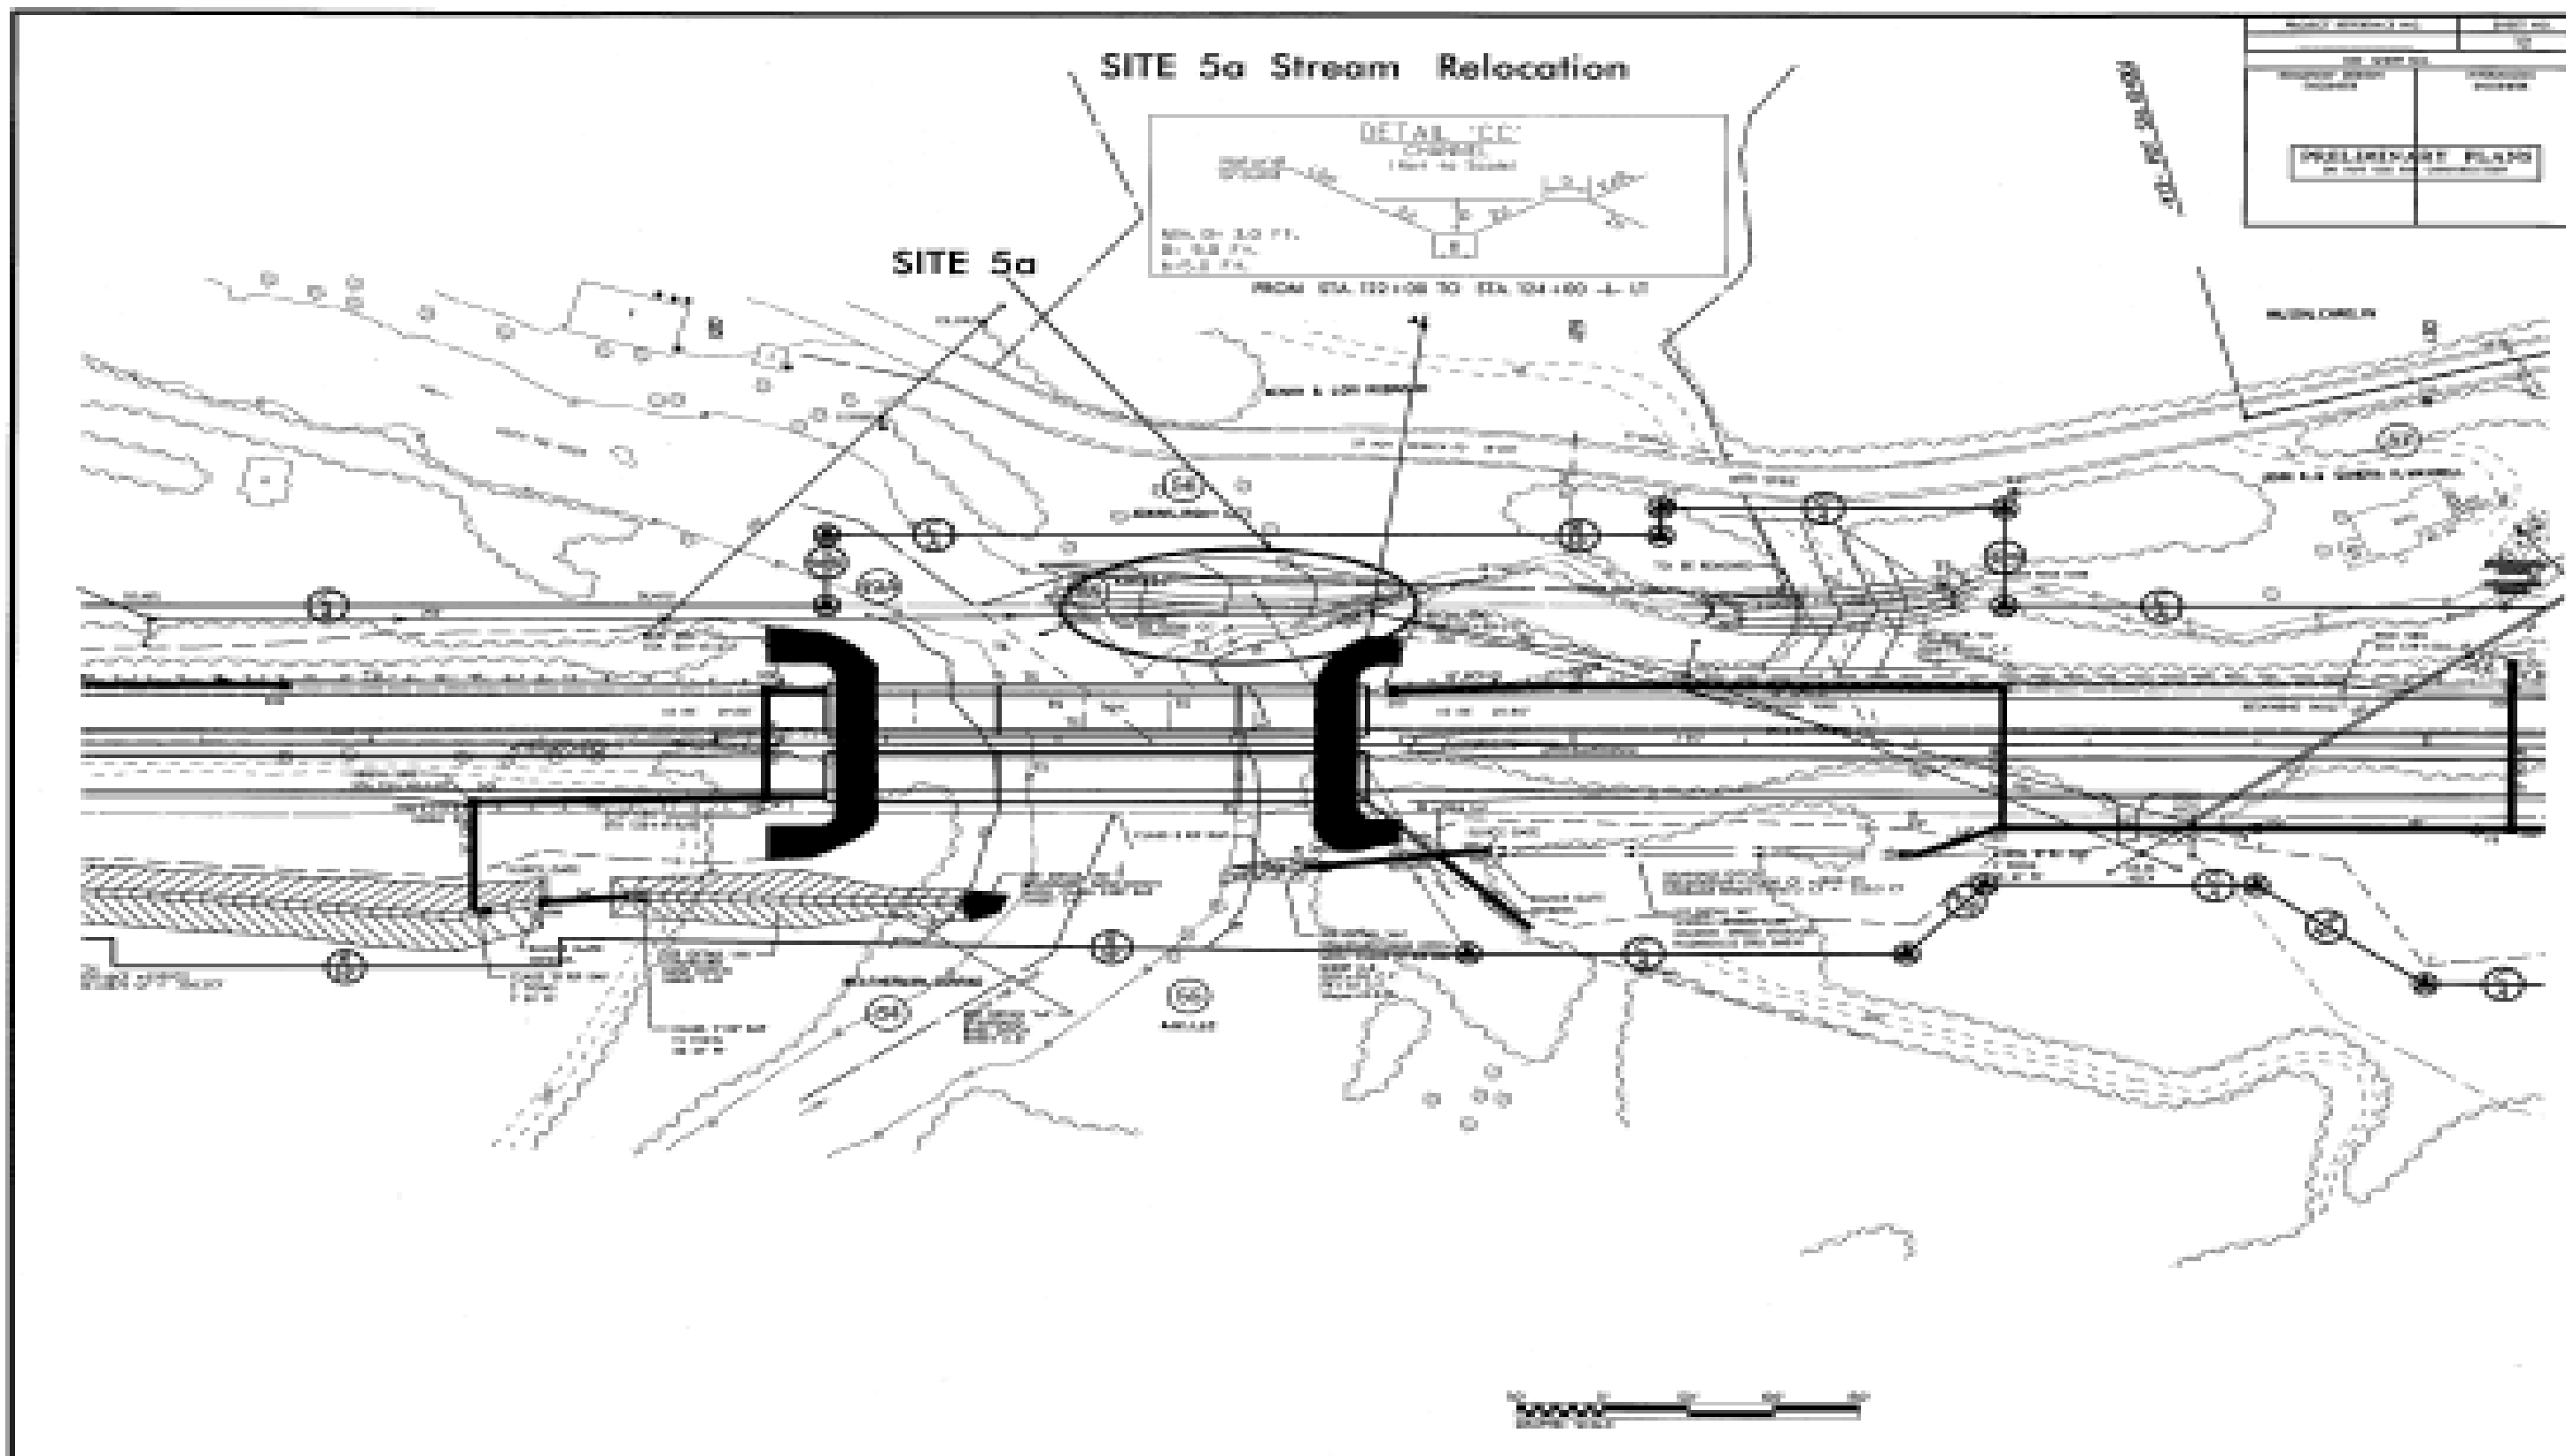


Figure 2. Site #5A Permit Drawing



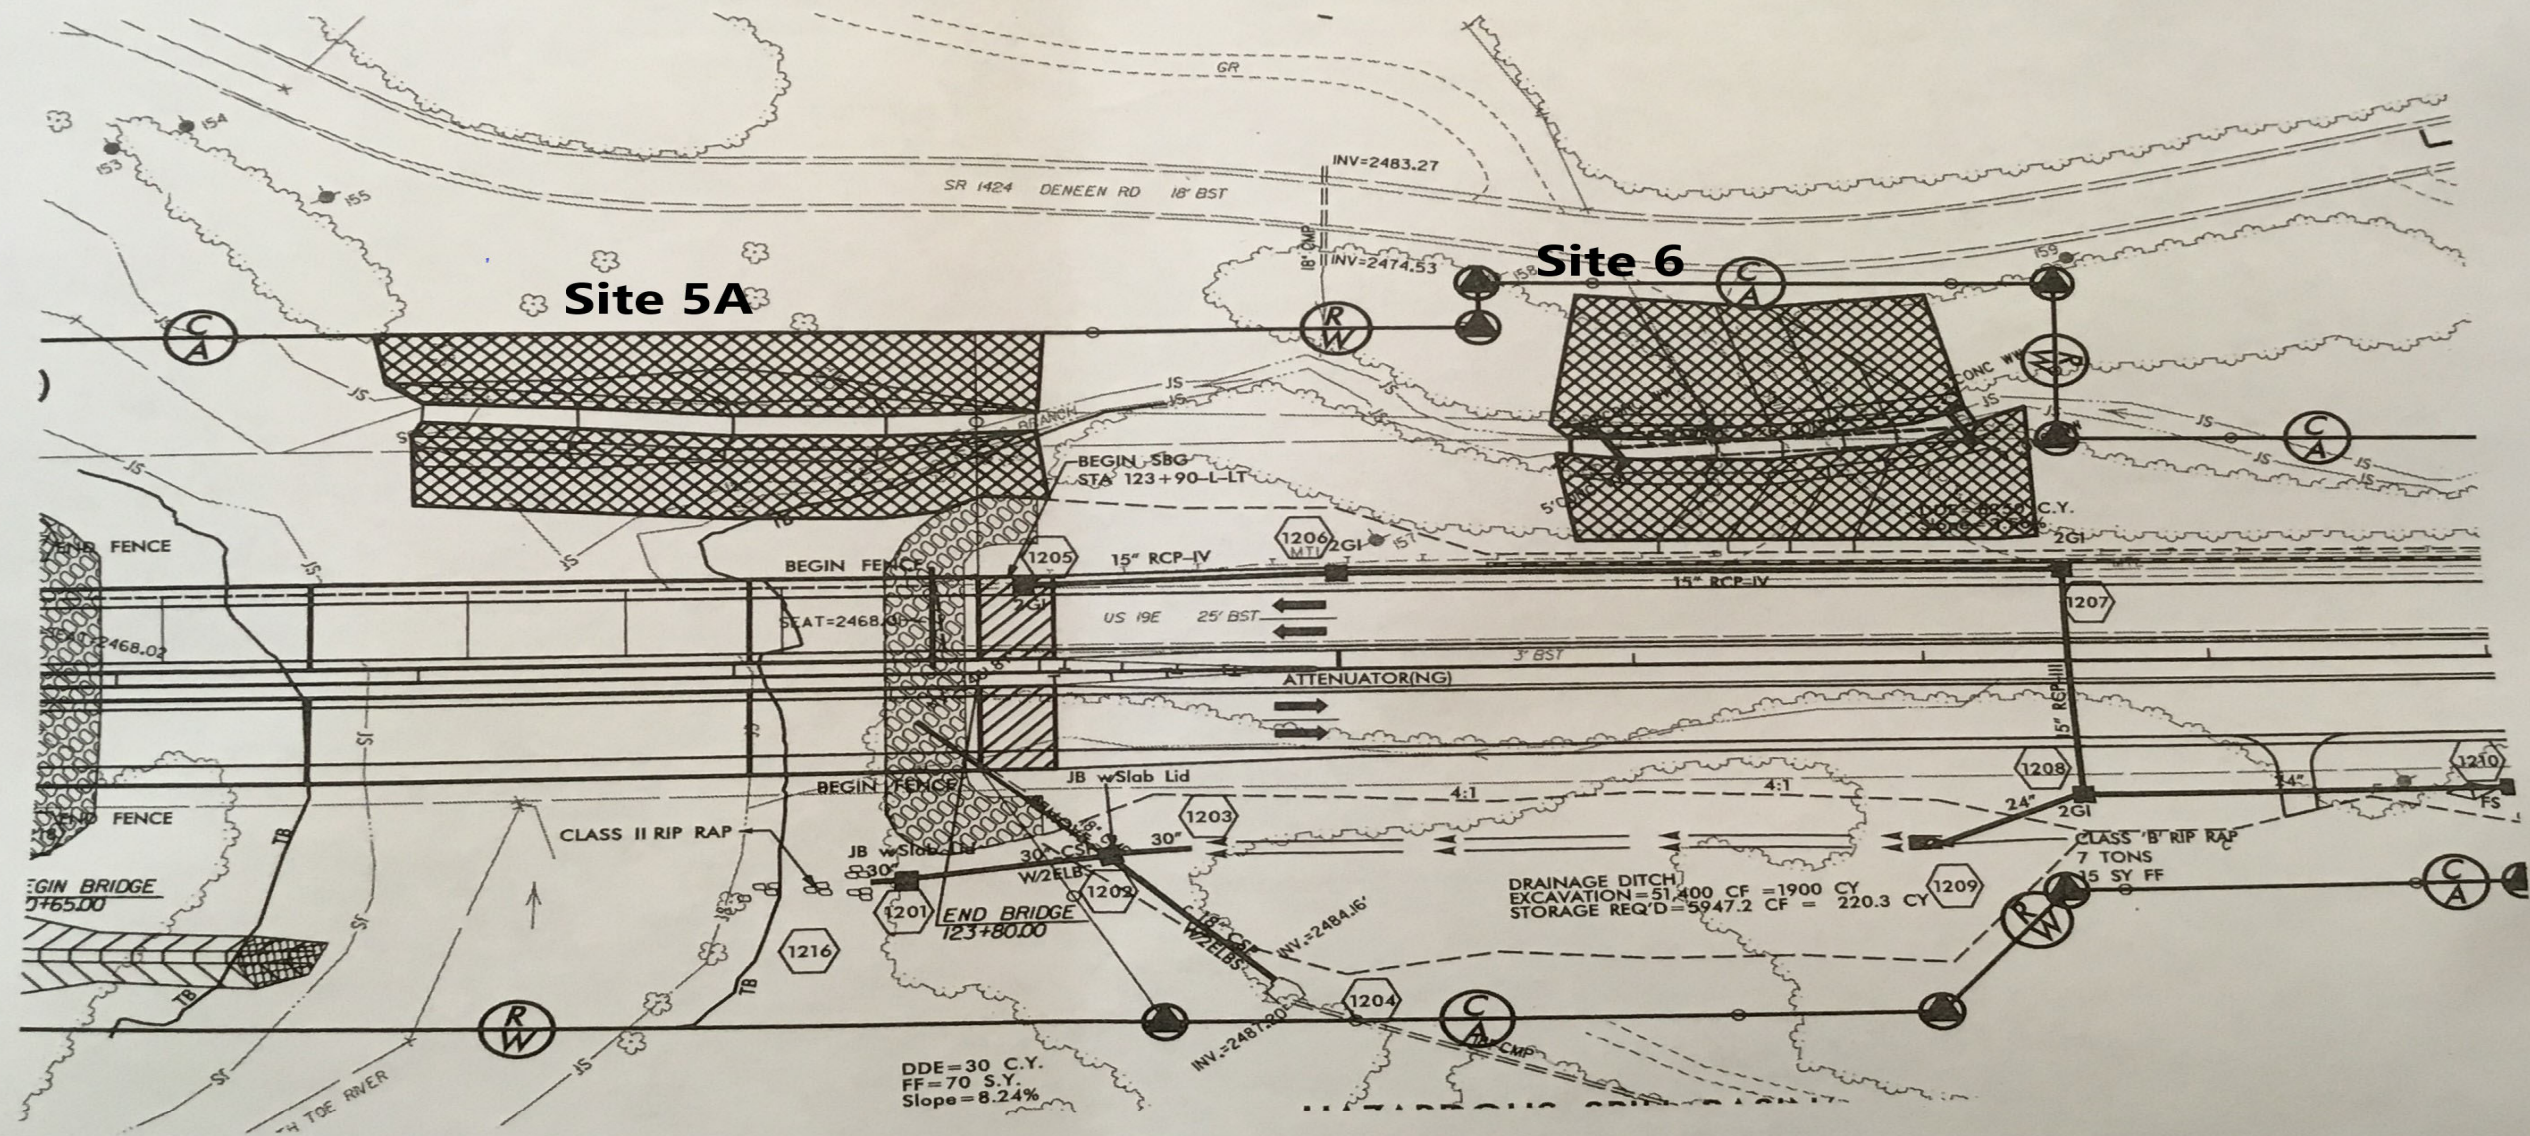


Figure 3. Site #5A Reforestation Plan



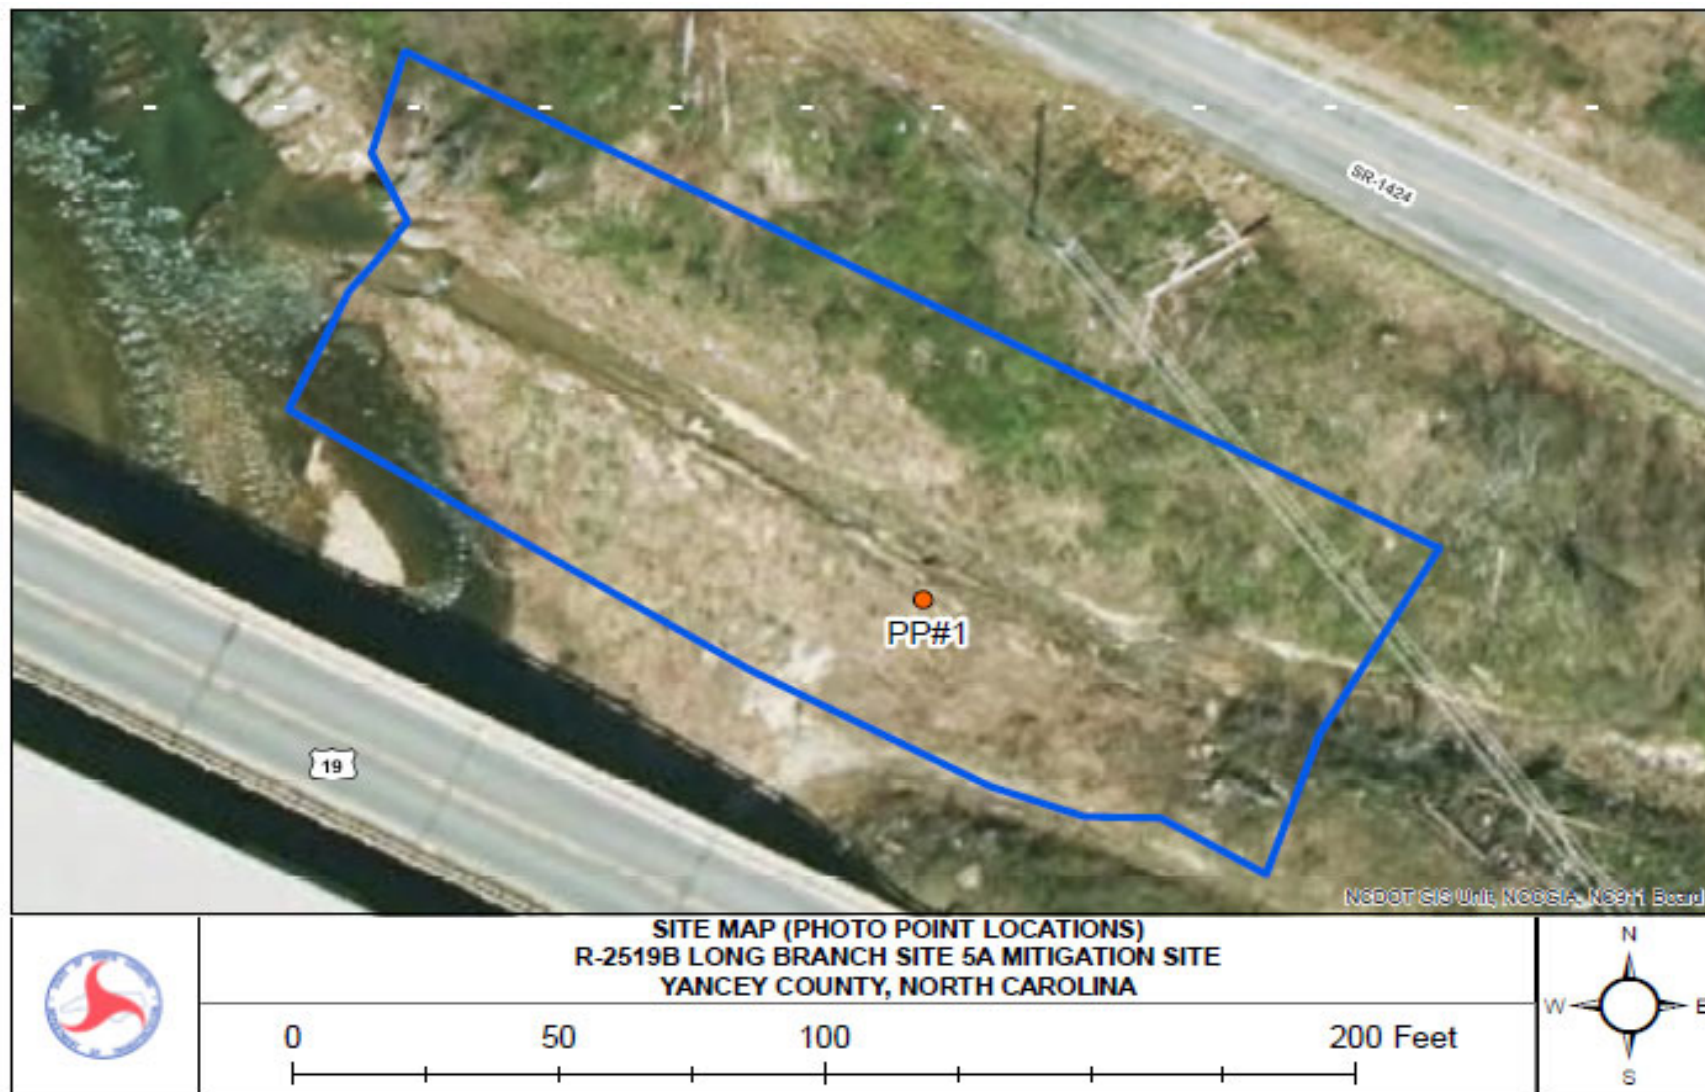


Figure 4. Site #5A Map



## **2.0 STREAM ASSESSMENT**

### **2.1 Success Criteria**

Based on email correspondence with the Regulatory Agencies it was agreed to maintain consistency and follow the mitigation plan language as it relates to vegetation monitoring.

#### **Mitigation Plan**

##### **Performance Standards**

Performance standards are based on the April 2003 Stream Mitigation Guidelines. Success for vegetation monitoring within the riparian buffer areas will be based on the survival of at least 260 stems of five-year-old trees at year five. Assessment of channel stability will be based on the survival of riparian vegetation and lack of significant bank erosion, channel widening or down-cutting.

##### **Monitoring Requirements**

Each site will be monitored for five years with no less than two bankfull events, which must occur in separate monitoring years and be documented. If less than two bankfull events occur during the first five years, monitoring will continue until the second bankfull event is documented. The following components of Level 1 monitoring will be performed annually for the monitoring period: reference photos, plant survival monitoring (identification of specific problem areas and remedial action), and visual inspection of channel stability. Vegetation stem counts will be conducted on Sites 8, 21, and 30 only. Physical measurements of channel stability/morphology will only be performed on Site 30. An as-built will be submitted for each site and will include stream channel profile and cross-section surveys which will provide a baseline for comparison if it is determined at any time during the monitoring period that a problem has occurred. Annual monitoring reports will be made available on the NCDOT website.

##### **NCDWR Condition #1**

The permittee shall visually monitor the vegetative plantings to assess and ensure complete stabilization of the mitigation stream segments. Riparian area success shall be determined by conducting stem counts to ensure a tree survival rate of 320 stems/acre. The monitoring shall be conducted annually for a minimum of 3 years after final planting. Photo documentation shall be utilized to document the success of the riparian vegetation and submitted to NCDWR in a final report within sixty days after completing monitoring. After 3 years the NCDOT shall contact NCDWR to schedule a site visit to “close out” the mitigation site.

## **2.2 Stream Description**

### **2.2.1 *Post-Construction Conditions***

Construction of the Long Branch Site #5A Mitigation Site involved relocating 148 feet of Long Branch at the confluence with the South Toe River. A new floodplain and channel were excavated. The riparian buffer zone will also be planted. The new channel will have a 25-foot buffer on the north bank and a 30-foot buffer on the south bank. An existing utility easement will impact 20 feet from top of bank on the left side for the entire relocated channel.

### **2.2.2 *Monitoring Conditions***

The objective of the Long Branch Site #5A stream relocation was to restore the stream as identified in Rosgen's Applied River Morphology. A visual stream assessment will be conducted annually each year of the monitoring period.

## **2.3 Results of the Stream Assessment**

### **2.3.1 *Site Data***

The visual assessment of the stream noted that the channel appears stable with some minor undercutting along the left bank. Little to no change was noted along the left bank from the previous year. A wrack line noted along the stream indicated a bankfull event had recently occurred. NCDOT will continue to monitor the channel stability at Site #5A in 2024.

### 3.0 VEGETATION: LONG BRANCH SITE #5A

#### 3.1 Description of Species

The following tree species were planted on the streambank:

*Salix nigra*, Black Willow

*Cornus amomum*, Silky Dogwood

The following tree species were planted in the buffer area:

*Liriodendron tulipifera*, Yellow Poplar

*Platanus occidentalis*, Sycamore

*Fraxinus pennsylvanica*, Green Ash

*Quercus alba*, White Oak

*Quercus rubra*, Northern Red Oak

*Betula nigra*, River Birch

*Quercus phellos*, Willow Oak

#### 3.2 Results of Vegetation Monitoring

**Streambank & Buffer Vegetation:** Black Willow, Silky Dogwood, Northern Red Oak and Sycamore were noted surviving along the streambank and within the buffer. Tag Alder was also noted along the streambank. Multiflora rose was also noted on site.

#### 3.3 Conclusions

Division 13 Roadside sprayed the invasive species in September 2023. NCDOT proposes to continue monitoring the planted vegetation in 2024.

### 4.0 OVERALL CONCLUSIONS/RECOMMENDATIONS

The Long Branch Site #5A site has met the required monitoring protocols for the fourth formal year of monitoring. The channel throughout the stream site is stable at this time with some minor undercutting along the left bank. Planted vegetation was noted surviving along the channel and within the buffer.

NCDOT proposes to continue stream and vegetation monitoring the Long Branch Site #5A mitigation site in 2024.



## **5.0 REFERENCES**

Mitigation Plan, US 19E Widening, Yancey and Mitchell Counties, North Carolina  
TIP Number R-2519B, WBS No. 35609.1.1, May 6, 2013 (Revised  
November 4, 2013)

Department of the Army Permit, Permittee: North Carolina Department of  
Transportation, Permit No. 2004-9987181 / 2004-30631, TIP No. R-  
2519B, Issuing Office: CESAW-RG-A

North Carolina Department of Environment and Natural Resources, Division of  
Water Resources, December 2, 2013, Proposed improvements to US 19E  
from SR 1186 in Yancey County to multilane section west of Spruce Pine  
in Mitchell County, State Project No. 6.909001T, WBS Element No.  
35609.1.1, TIP R-2519B, NCDWR Project No. 2013-0743v.2

Rosgen, D.L, 1996. Applied River Morphology. Wildland Hydrology, Pagosa  
Springs, Colorado.

US Army Corps of Engineers (USACE), 2003. Stream Mitigation Guidelines.  
Prepared with cooperation from the US Environmental Protection Agency,  
NC Wildlife Resources Commission, and the NC Division of Water  
Resources.

## **APPENDIX A**

### **SITE PHOTOGRAPHS**

# Long Branch Site #5A



Photo Point #1 (Upstream)



Photo Point #1 (Downstream)



Undercut left bank

July 2023