


ANNUAL REPORT FOR 2021

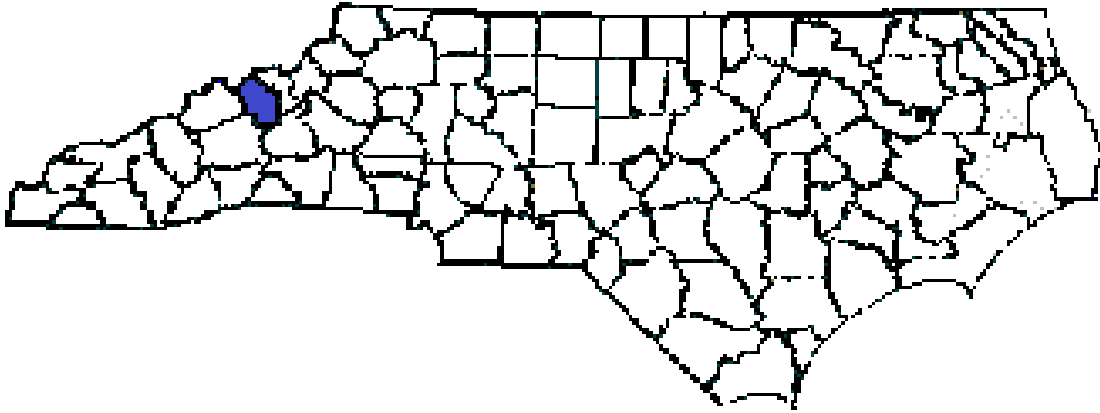

Long Branch Site #6 Mitigation Site

ONE ID #: 100-014

Yancey County

TIP No. R-2519B

COE Action ID: SAW-2004-9987181 / 2004-30631

NCDWR Project #: 2013-0743v.2



Prepared By:
Roadside Environmental Unit and Environmental Analysis Unit
North Carolina Department of Transportation
September 2021

TABLE OF CONTENTS

SUMMARY	1
1.0 INTRODUCTION:.....	2
.1 Project Description	2
.2 Purpose	2
.3 Project History	2
.4 Debit Ledger.....	2
2.0 STREAM ASSESSMENT:	7
.1 Success Criteria	7
.2 Stream Description	8
.2.1 Post Construction Conditions.....	8
.2.2 Monitoring Conditions	8
.3 Results of Stream Monitoring	8
.3.1 Site Data	8
3.0 VEGETATION	9
.1 Description of Species.....	9
.2 Results of Vegetation Monitoring.....	9
.3 Conclusions	9
4.0 OVERALL CONCLUSIONS/RECOMMENDATIONS	9
5.0 REFERENCES:	10

FIGURES

Figure 1 – Site #6 Vicinity Map	3
Figure 2 – Site #6 Permit Drawing	4
Figure 3 – Site #6 Reforestation Plan	5
Figure 4 – Site #6 Map	6

APPENDICES

Appendix A – Site Photographs

SUMMARY

The following report summarizes the stream monitoring activities that have occurred during the Year 2021 at the Long Branch Site #6 Mitigation Site in Yancey County. The North Carolina Department of Transportation (NCDOT) completed the streambank reforestation at this project in March 2020. This report provides the monitoring results for the second formal year of monitoring (Year 2021). The Year 2021 monitoring period was the second of five scheduled years of monitoring on the Long Branch Site #6 Mitigation Site (See Success Criteria Section 2.1).

Based on the overall conclusions of monitoring at the Long Branch Site #6, it has met the required monitoring protocols for the second formal year of monitoring on the stream. The channel throughout the stream site is stable at this time. The streambank and buffer planted vegetation is surviving at this time. A supplemental planted was completed along the buffer in February 2021.

NCDOT proposes to continue stream and vegetation monitoring at the Long Branch Site #6 Mitigation Site in 2022.

1.0 INTRODUCTION

1.1 Project Description

The following report summarizes the stream monitoring activities that have occurred during the Year 2021 at the Long Branch Site #6 Mitigation Site. Site #6 is located on US 19 adjacent to the South Toe River crossing in Yancey County at Sta. 125+95 to 127+17 -L- Lt. (Figure 1). The Long Branch Site #6 was constructed to provide mitigation for stream impacts associated with Transportation Improvement Program (TIP) number R-2519B in Yancey and Mitchell Counties.

The mitigation site provided approximately 144 linear feet of stream restoration. Streambank reforestation was completed in March 2020 by NCDOT. The restoration of the Long Branch Site #6 Mitigation Site involved the removal of a perched, two-barrel, six foot by six foot, reinforced concrete box culvert (RCBC) and soil path on Long Branch. Several cross vanes were installed within the channel bed. The riparian buffer zone was also be planted with a 50-foot buffer on the north side and a 30-foot buffer on the south side. The last 15 feet of stream will have the buffer reduced from 30 feet to 25 feet on the left bank due to an overhead utility line.

1.2 Purpose

In order for a mitigation site to be considered successful, the site must meet the success criteria. This report details the monitoring in 2021 at the Long Branch Site #6 Mitigation Site. Hydrologic monitoring was not required for this site.

1.3 Project History

March 2020	Streambank Reforestation Completed
September 2020	Stream Channel and Vegetation Monitoring (Year 1)
February 2021	Supplemental Buffer Planting Completed
April 2021	NCDOT and Regulatory Agency Onsite Review
July 2021	Stream Channel and Vegetation Monitoring (Year 2)

1.4 Debit Ledger

The entire Long Branch Site #6 stream mitigation site was used for the R-2519B project to compensate for unavoidable stream impacts.

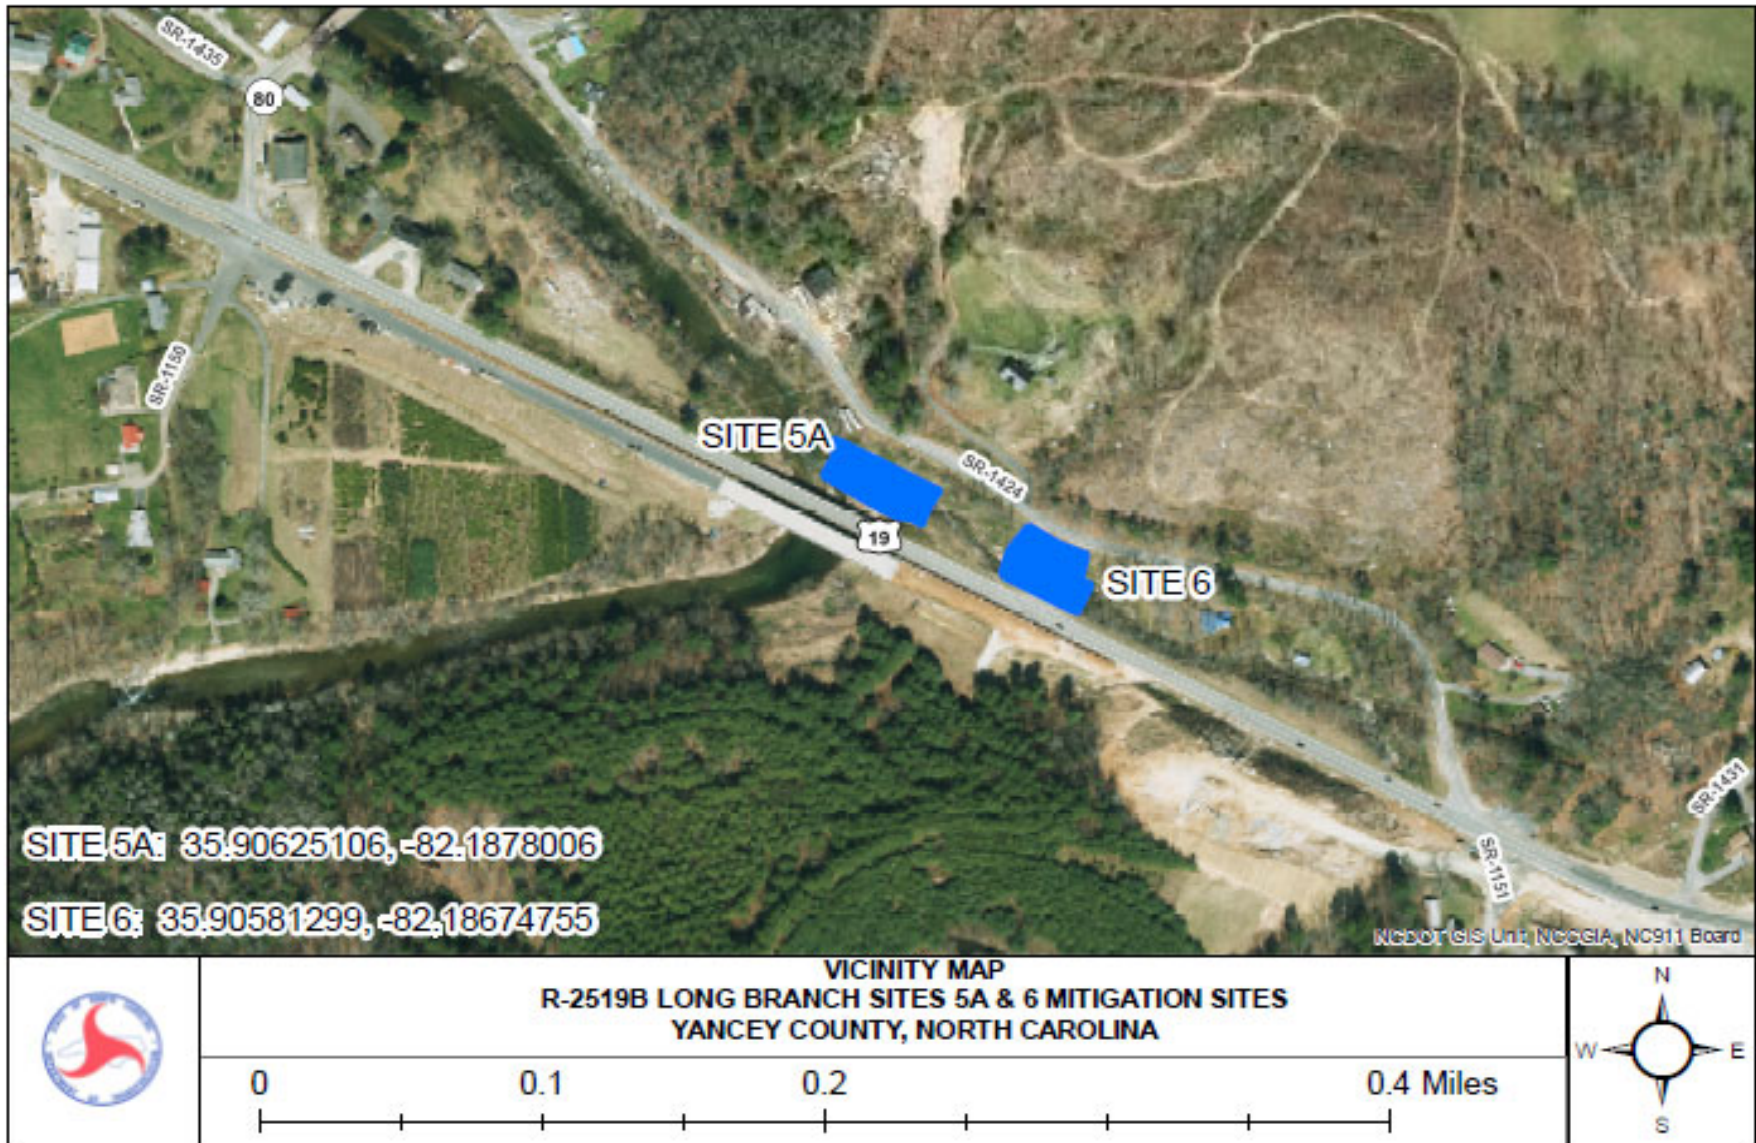


Figure 1. Vicinity Map

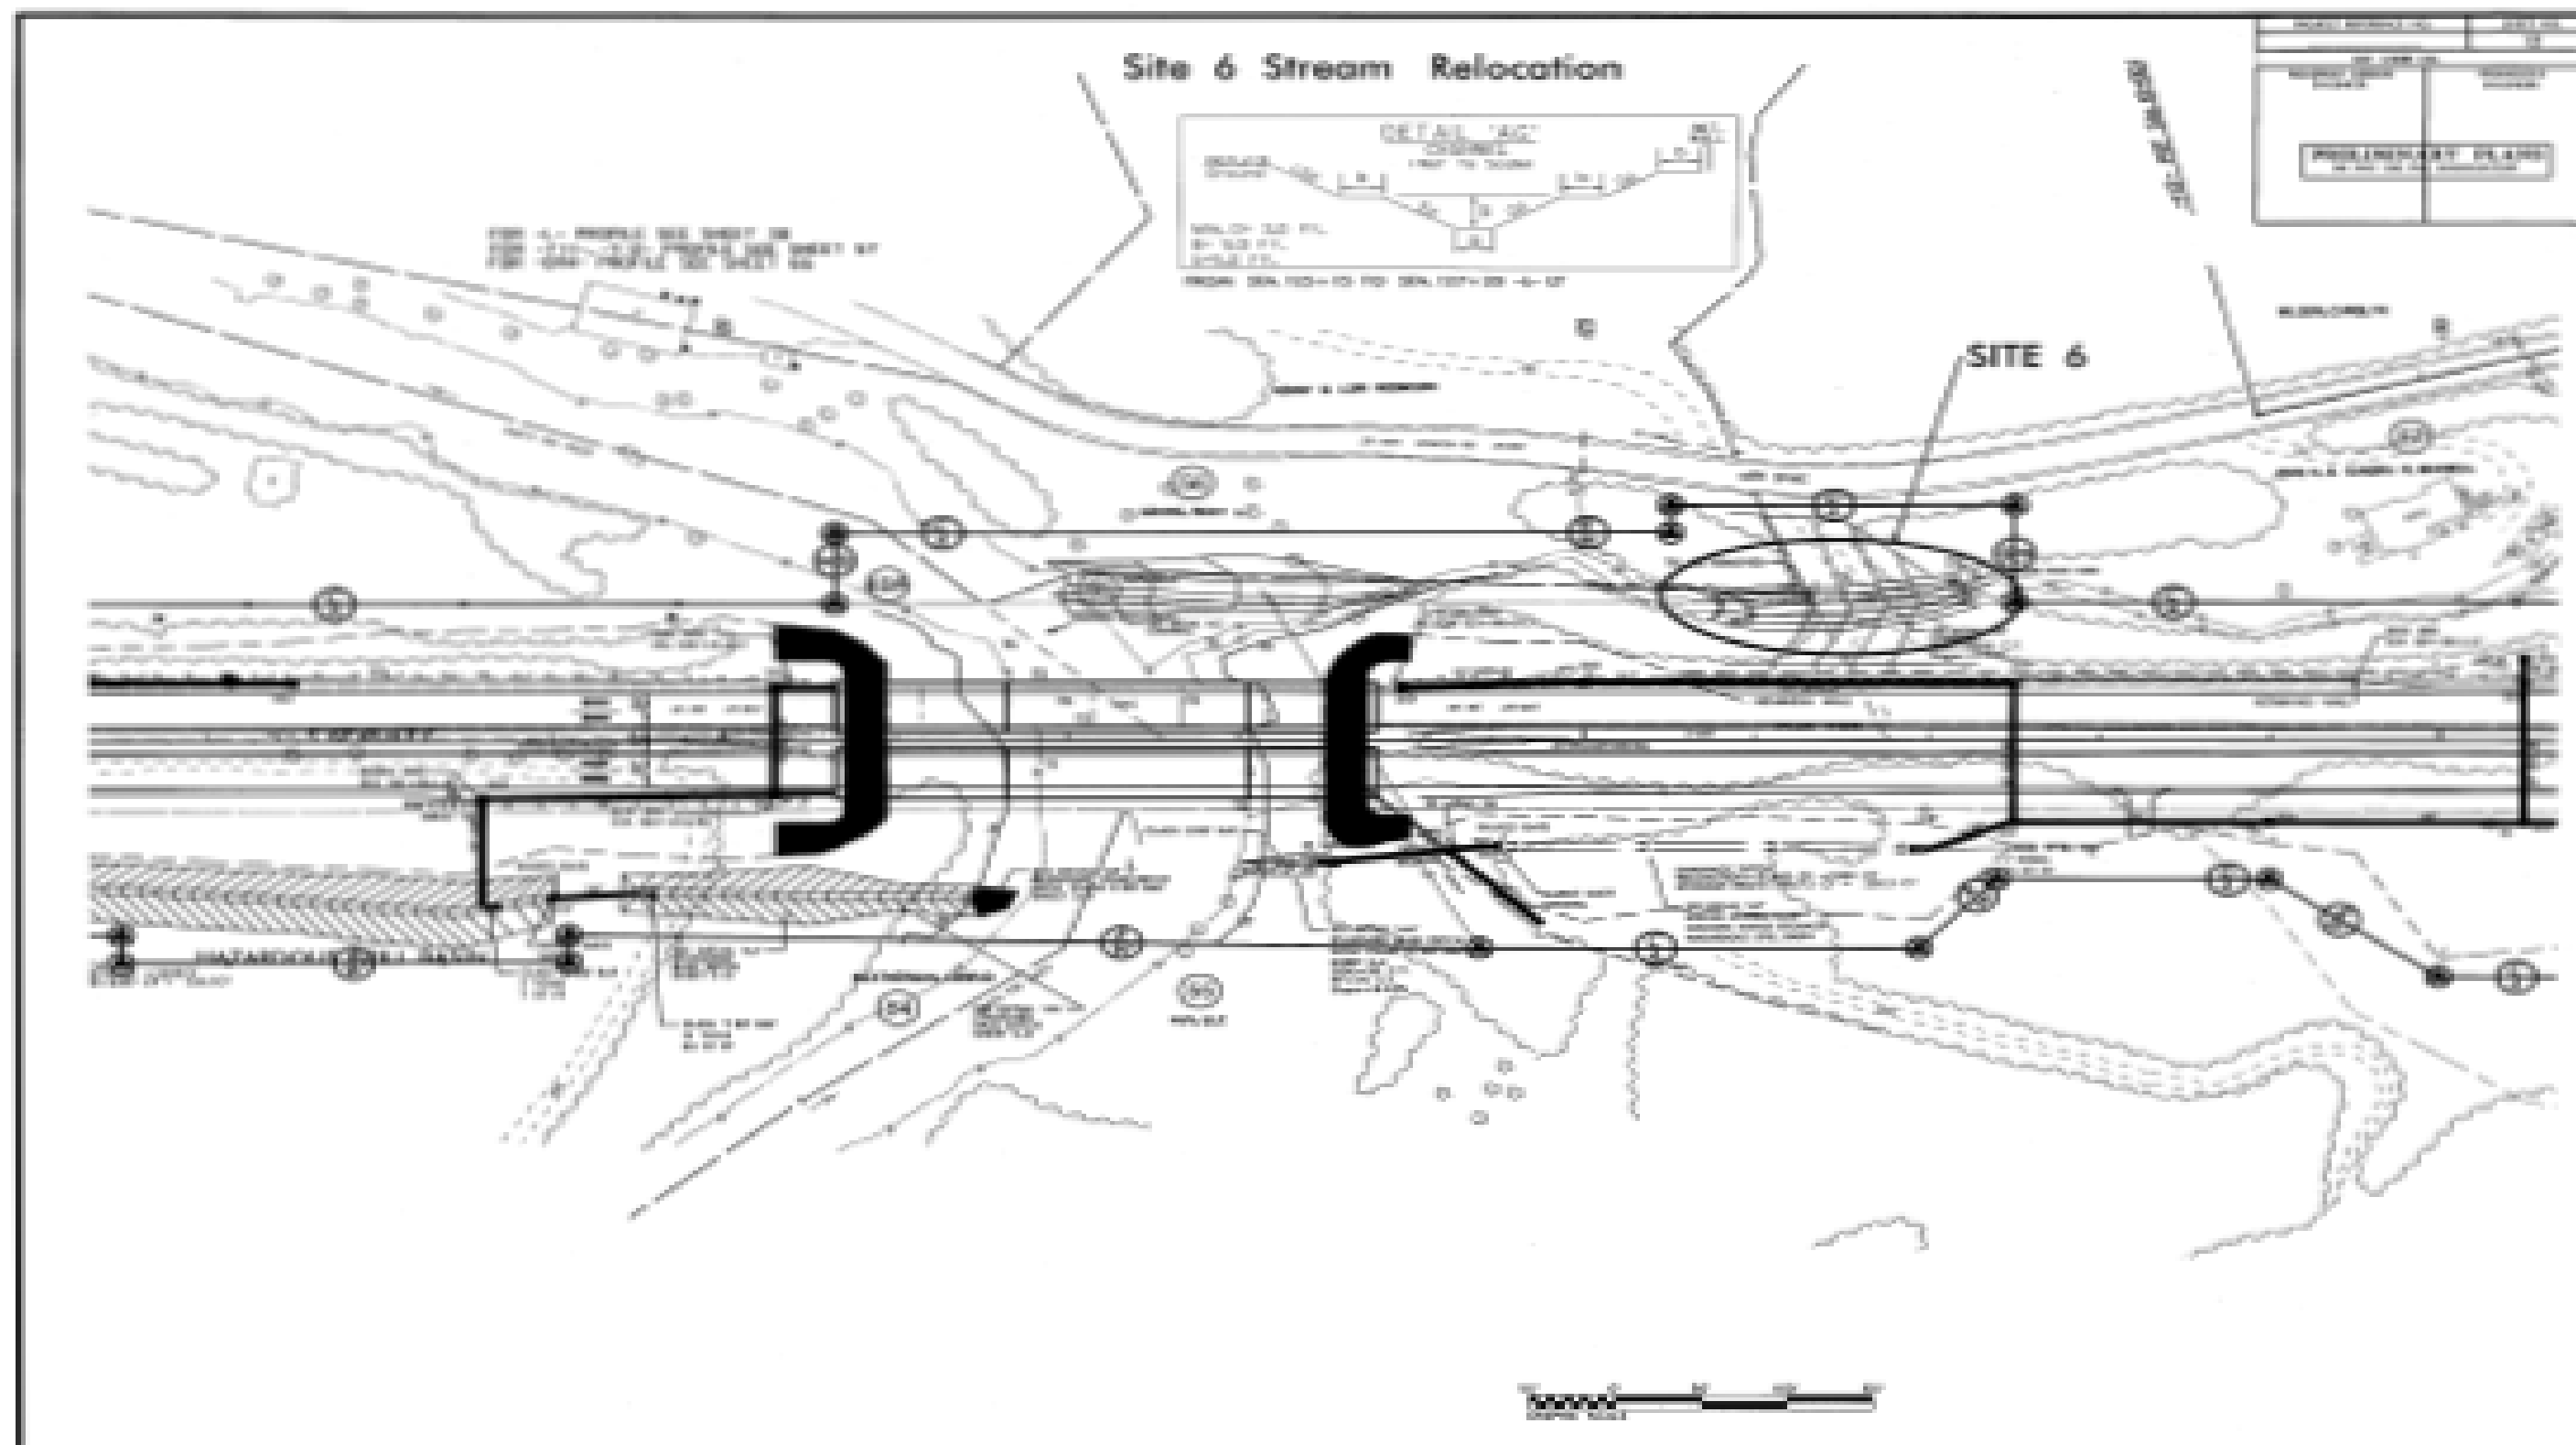


Figure 2. Site #6 Permit Drawing

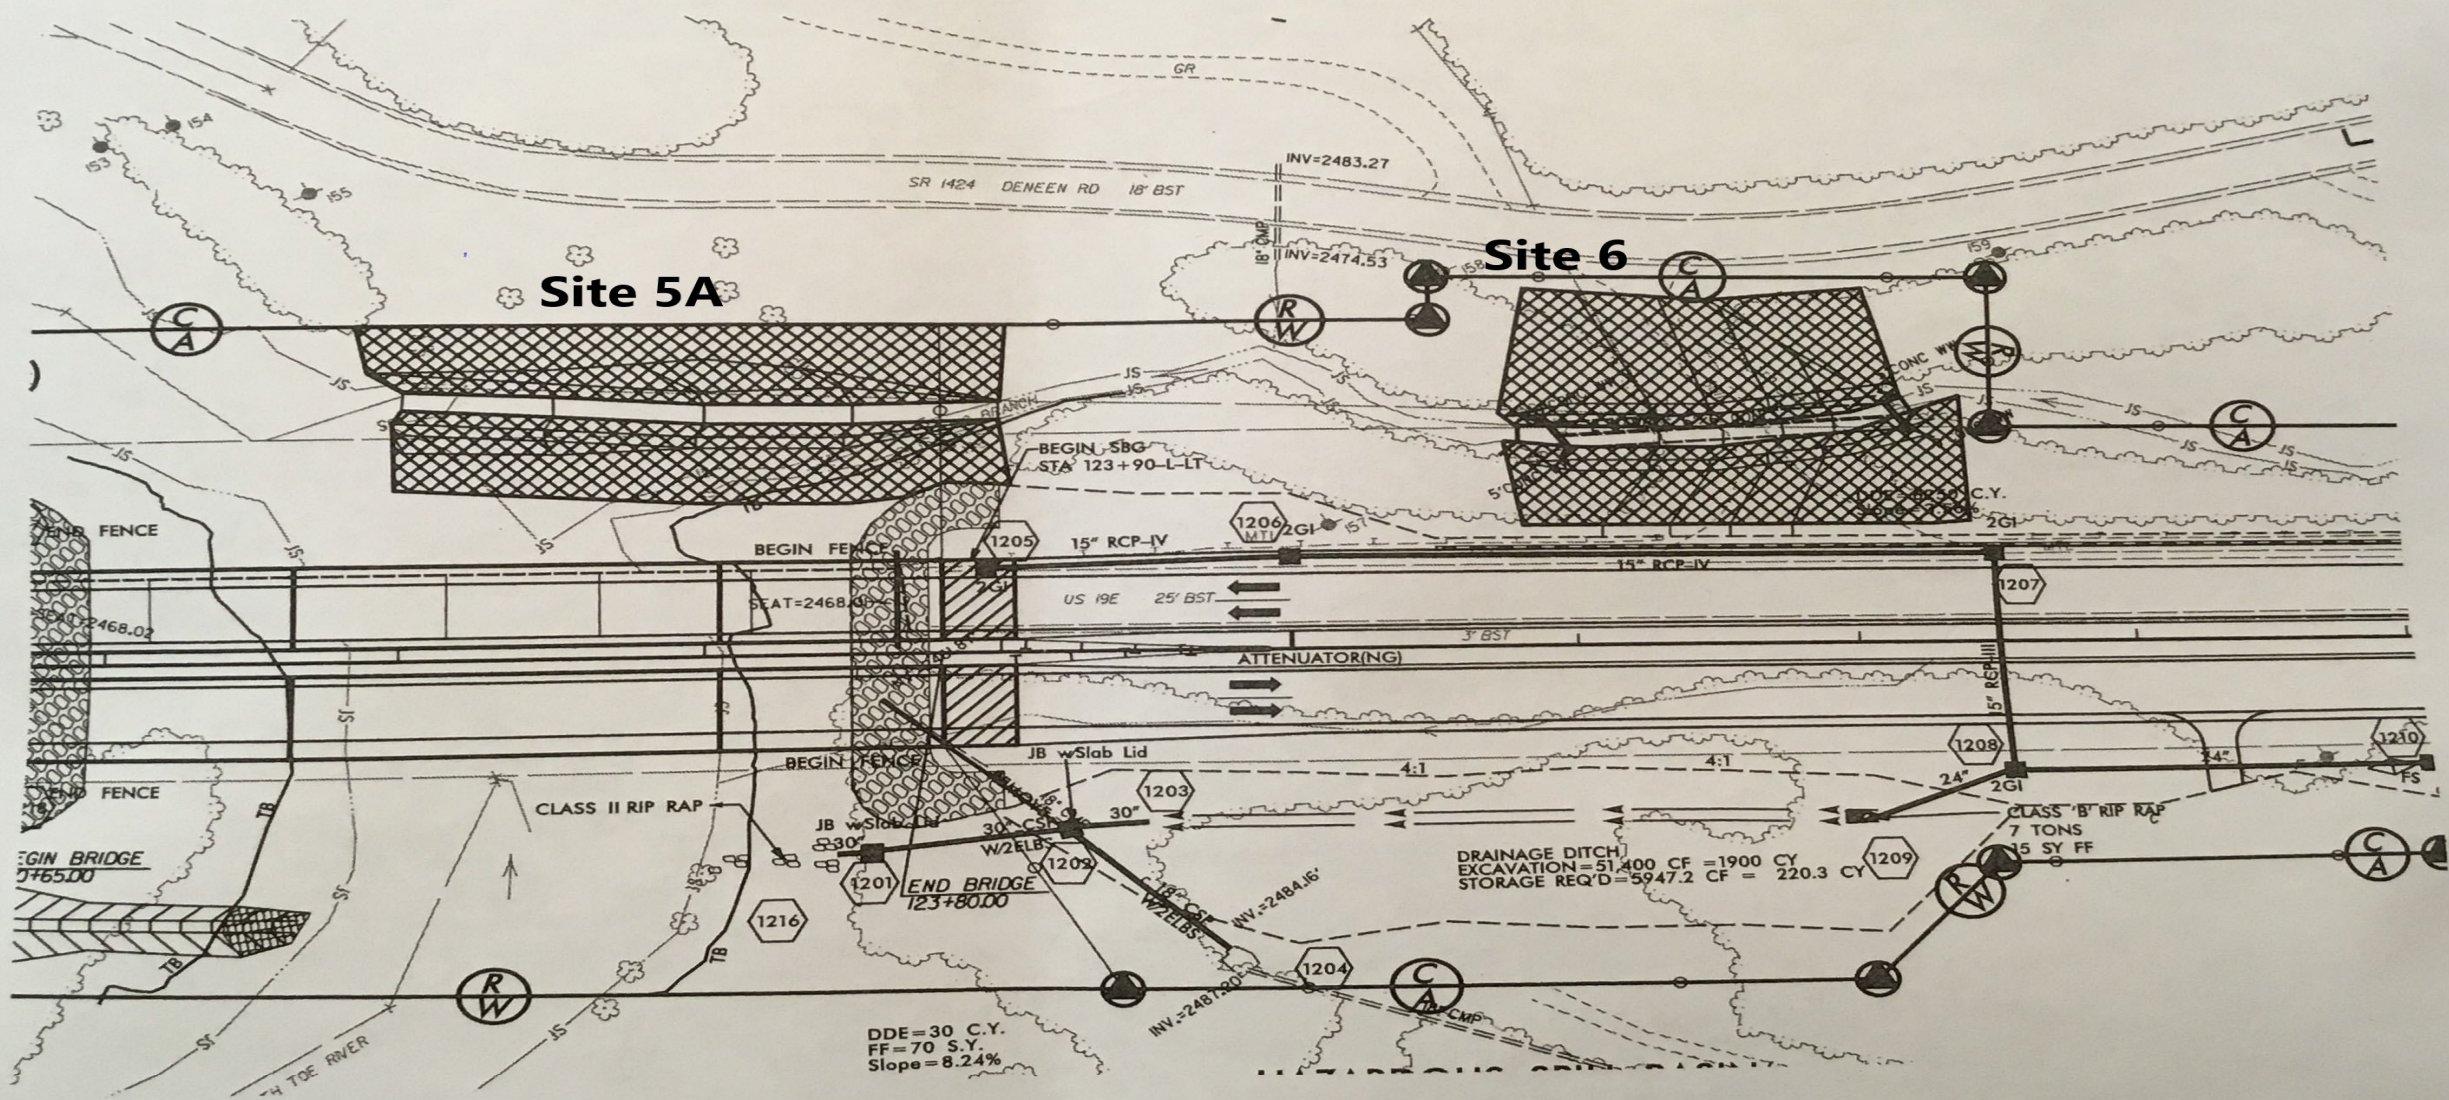


Figure 3. Site #6 Reforestation Plan

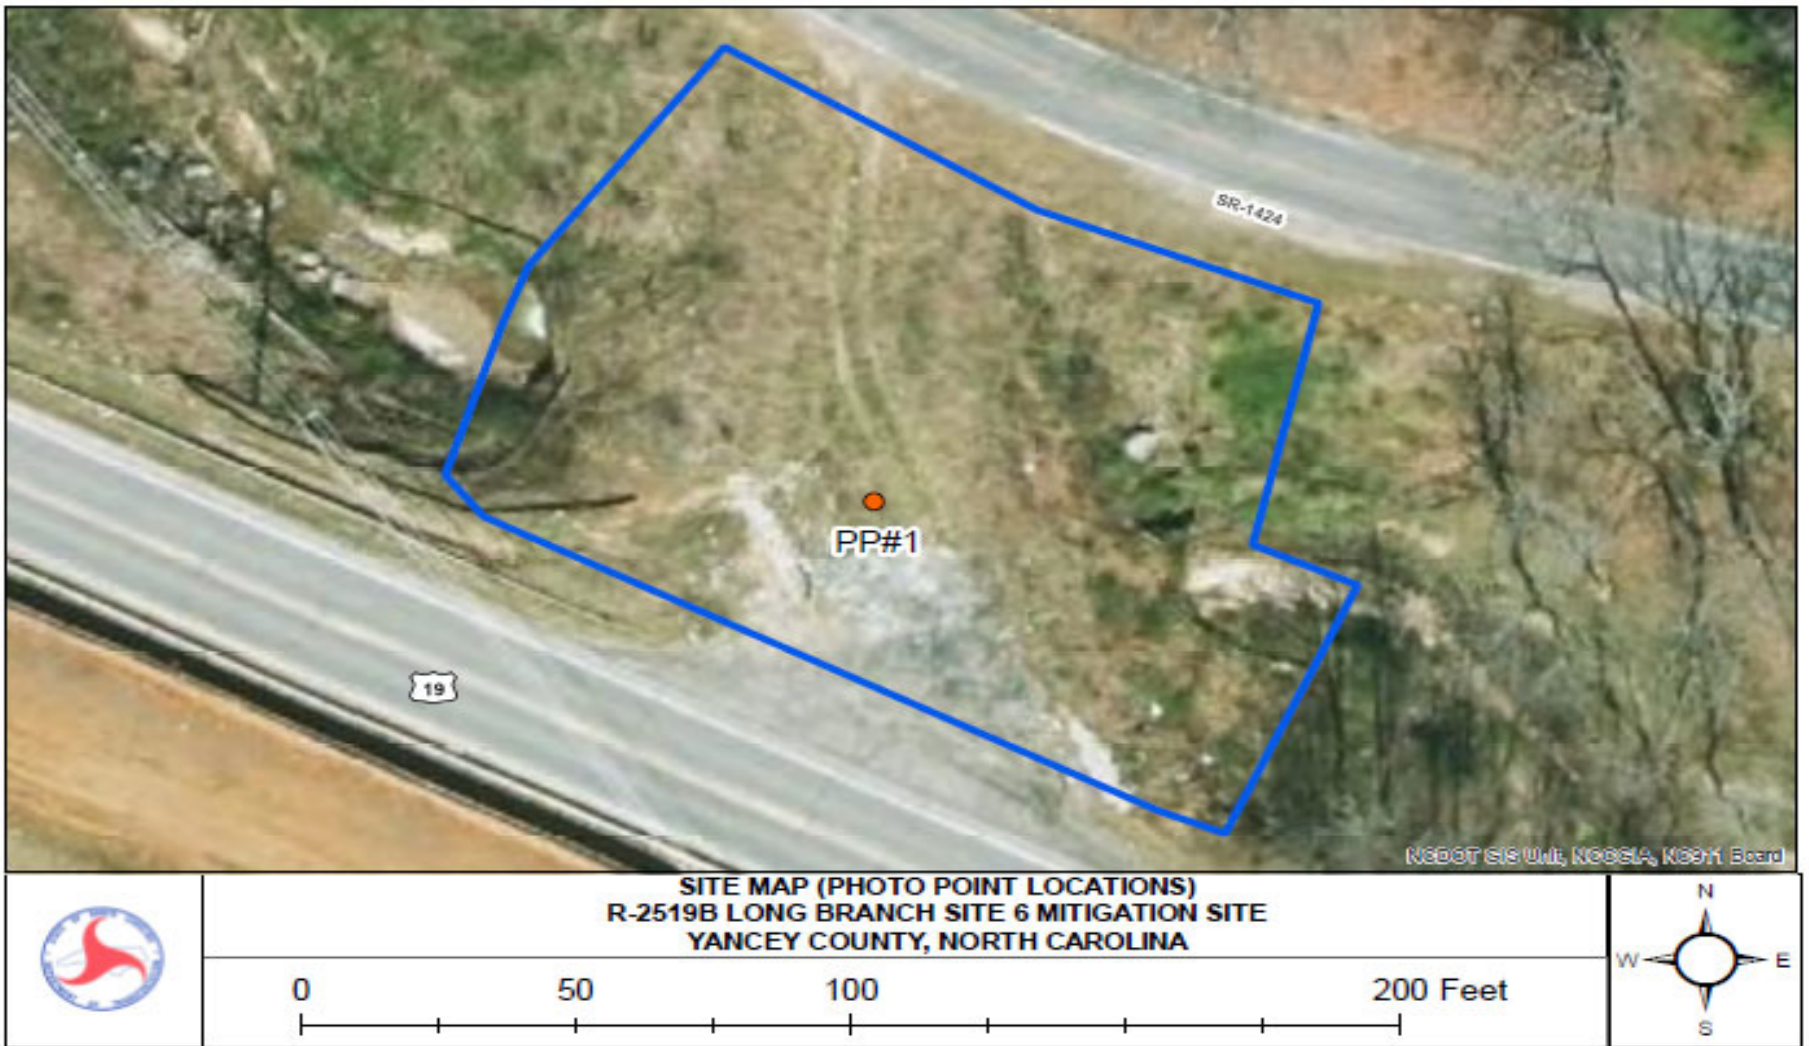


Figure 3. Site #6 Map

2.0 STREAM ASSESSMENT

2.1 Success Criteria

Based on email correspondence with the Regulatory Agencies it was agreed to maintain consistency and follow the mitigation plan language as it relates to the vegetation monitoring.

Mitigation Plan

Performance Standards

Performance standards are based on the April 2003 Stream Mitigation Guidelines. Success for vegetation monitoring within the riparian buffer areas will be based on the survival of at least 260 stems of five-year-old trees at year five. Assessment of channel stability will be based on the survival of riparian vegetation and lack of significant bank erosion, channel widening or down-cutting.

Monitoring Requirements

Each site will be monitored for five years with no less than two bankfull events, which must occur in separate monitoring years and be documented. If less than two bankfull events occur during the first five years, monitoring will continue until the second bankfull event is documented. The following components of Level 1 monitoring will be performed annually for the monitoring period: reference photos, plant survival monitoring (identification of specific problem areas and remedial action), and visual inspection of channel stability. Vegetation stem counts will be conducted on Sites 8, 21, and 30 only. Physical measurements of channel stability/morphology will only be performed on Site 30. An as-built will be submitted for each site and will include stream channel profile and cross-section surveys which will provide a baseline for comparison if it is determined at any time during the monitoring period that a problem has occurred. Annual monitoring reports will be made available on the NCDOT website.

NCDWR Condition #1

The permittee shall visually monitor the vegetative plantings to assess and ensure complete stabilization of the mitigation stream segments. Riparian area success shall be determined by conducting stem counts to ensure a tree survival rate of 320 stems/acre. The monitoring shall be conducted annually for a minimum of 3 years after final planting. Photo documentation shall be utilized to document the success of the riparian vegetation and submitted to NCDWR in a final report within sixty days after completing monitoring. After 3 years the NCDOT shall contact NCDWR to schedule a site visit to “close out” the mitigation site.

2.2 Stream Description

2.2.1 *Post-Construction Conditions*

The restoration of the Long Branch Site #6 Mitigation Site involved the removal of a perched, two-barrel, six foot by six foot, reinforced concrete box culvert (RCBC) and soil path on Long Branch. Several cross vanes were installed within the channel bed. The riparian buffer zone was also be planted with a 50-foot buffer on the north side and a 30-foot buffer on the south side. The last 15 feet of stream will have the buffer reduced from 30 feet to 25 feet on the left bank due to an overhead utility line

2.2.2 *Monitoring Conditions*

The objective of the Long Branch Site #6 stream restoration was to restore a stream as identified in Rosgen's Applied River Morphology. A visual stream assessment will be conducted annually each year of the monitoring period.

2.3 Results of the Stream Assessment

2.3.1 *Site Data*

The visual assessment of the stream noted that the channel appears stable with little or no active bank erosion. The cross vane that was noted during the on-site agency review was determined to be functioning properly during the 2021 annual monitoring. NCDOT will continue to monitor the channel stability at Site #6 in 2022.

3.0 VEGETATION: LONG BRANCH SITE #6

3.1 Description of Species

The following tree species were planted on the streambank:

Salix nigra, Black Willow

Cornus amomum, Silky Dogwood

The following tree species were planted in the buffer area:

Liriodendron tulipifera, Yellow Poplar

Platanus occidentalis, Sycamore

Fraxinus pennsylvanica, Green Ash

Quercus alba, White Oak

Quercus rubra, Northern Red Oak

Betula nigra, River Birch

Quercus phellos, Willow Oak

3.2 Results of Vegetation Monitoring

Streambank & Buffer Vegetation: Visual planted vegetation assessment noted the planted vegetation is surviving along the streambanks and within the buffer area. Silky Dogwood, Black Willow, Sycamore, Green Ash, Northern Red Oak, and River Birch were noted surviving.

3.3 Conclusions

NCDOT proposes to continue monitoring the planted vegetation in 2022.

4.0 OVERALL CONCLUSIONS/RECOMMENDATIONS

The Long Branch Site #6 Mitigation Site has met the required monitoring protocols for the second formal year of monitoring. The channel throughout the stream site is stable at this time. The planted vegetation is surviving along the streambanks and within the buffer area.

NCDOT proposes to continue stream and vegetation monitoring at the Long Branch Site #6 Mitigation Site in 2022.

5.0 REFERENCES

Mitigation Plan, US 19E Widening, Yancey and Mitchell Counties, North Carolina
TIP Number R-2519B, WBS No. 35609.1.1, May 6, 2013 (Revised
November 4, 2013)

Department of the Army Permit, Permittee: North Carolina Department of
Transportation, Permit No. 2004-9987181 / 2004-30631, TIP No. R-
2519B, Issuing Office: CESAW-RG-A

North Carolina Department of Environment and Natural Resources, Division of
Water Resources, December 2, 2013, Proposed improvements to US 19E
from SR 1186 in Yancey County to multilane section west of Spruce Pine
in Mitchell County, State Project No. 6.909001T, WBS Element No.
35609.1.1, TIP R-2519B, NCDWR Project No. 2013-0743v.2

Rosgen, D.L, 1996. Applied River Morphology. Wildland Hydrology, Pagosa
Springs, Colorado.

US Army Corps of Engineers (USACE), 2003. Stream Mitigation Guidelines.
Prepared with cooperation from the US Environmental Protection Agency,
NC Wildlife Resources Commission, and the NC Division of Water
Resources.

APPENDIX A

SITE PHOTOGRAPHS

Long Branch Site #6



Photo Point #1 (Upstream)



Photo Point #1 (Downstream)



Upper crossvane

July 2021