
# **ANNUAL REPORT FOR 2021**



Parsnip Branch Site #18 Mitigation Site ONE ID #: 100-017 Yancey County TIP No. R-2519B COE Action ID: SAW-2004-9987181 / 2004-30631 NCDWR Project #: 2013-0743v.2

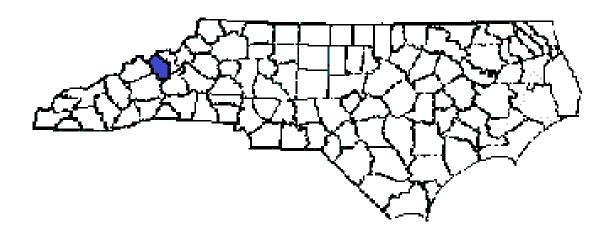

Prepared By: Roadside Environmental Unit and Environmental Analysis Unit North Carolina Department of Transportation September 2021

SUMN	1ARY	1
1.0	INTRODUCTION: 2   .1 Project Description   .2 Purpose   .3 Project History   .4 Debit Ledger	2 2 2
2.0	STREAM ASSESSMENT:	7
	.1Success Criteria.2Stream Description.2.1Post Construction Conditions.2.2Monitoring Conditions.3Results of Stream Monitoring.3.1Site Data	3 3 3 3
3.0	VEGETATION9.1Description of Species.2Results of Vegetation Monitoring.3Conclusions	9 9
4.0	OVERALL CONCLUSIONS/RECOMMENDATIONS	
5.0	REFERENCES:10	

# TABLE OF CONTENTS

# FIGURES

Figure 1 – Site #18 Vicinity Map	3
Figure 2 – Site #18 Permit Drawing	4
Figure 3 – Site #18 Reforestation Plan	5
Figure 4 – Site #18 Map	6

# APPENDICES

Appendix A – Site Photographs

#### SUMMARY

The following report summarizes the stream monitoring activities that have occurred during the Year 2021 at the Parsnip Branch Site #18 Mitigation Site in Yancey County. The North Carolina Department of Transportation (NCDOT) completed the streambank reforestation at this project in March 2020. This report provides the monitoring results for the second formal year of monitoring (Year 2021). The Year 2021 monitoring period was the second of five scheduled years of monitoring on the Parsnip Branch Site #18 Mitigation Site (See Success Criteria Section 2.1).

Based on the overall conclusions of monitoring at the Parsnip Branch Site #18, it has met the required monitoring protocols for the second formal year of monitoring on the stream. The channel throughout the stream site is stable at this time. The planted vegetation is surviving at this time. A supplemental planting was completed at this site in February 2021.

NCDOT proposes to continue stream and vegetation monitoring at the Parsnip Branch Site #18 Mitigation Site in 2022.

## 1.0 INTRODUCTION

#### 1.1 **Project Description**

The following report summarizes the stream monitoring activities that have occurred during the Year 2021 at the Parsnip Branch Site #18 Mitigation Site. Site #8 is located on US 19 in Yancey County at Sta. 214+00-L- Lt. (Figure 1). The Parsnip Branch Site #18 was constructed to provide mitigation for stream impacts associated with Transportation Improvement Program (TIP) number R-2519B in Yancey and Mitchell Counties.

The mitigation site provided approximately 70 linear feet of stream restoration. Streambank reforestation was completed in March 2020 by NCDOT. The restoration of the Parsnip Branch Site #18 Mitigation Site involved relocating 70 feet of Parsnip Branch due to the installation of a new 54-inch pipe. NCDOT will relocate the stream, instead of extending the new pipe structure at this site. The channel will be lined with Class I rip rap from the channel toe up the side slopes to a height of 1.5 feet. A 50-foot buffer will be planted on the eastern side and a 40-50 buffer will be planted on the western side of the channel. A new overhead utility will be installed just west of Arbuckle Road which will affect the last 15 feet of stream on the right-hand side by reducing the buffer to between 25 to 30 feet.

#### 1.2 Purpose

In order for a mitigation site to be considered successful, the site must meet the success criteria. This report details the monitoring in 2021 at the Parsnip Branch Site #18 Mitigation Site. Hydrologic monitoring was not required for this site.

#### 1.3 **Project History**

March 2020	Streambank Reforestation Completed
September 2020 February 2021 July 2021 August 2021	Stream Channel and Vegetation Monitoring (Year 1) Supplemental Planting Completed Stream Channel and Vegetation Monitoring (Year 2) Herbicide Application on Invasive Species

#### 1.4 Debit Ledger

The entire Parsnip Branch Site #18 stream mitigation site was used for the R-2519B project to compensate for unavoidable stream impacts.

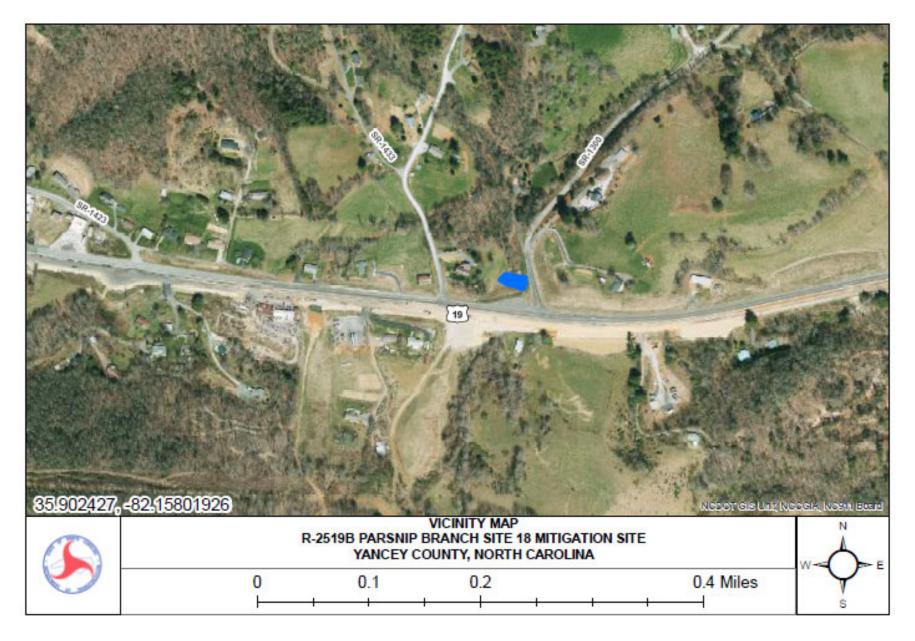


Figure 1. Vicinity Map

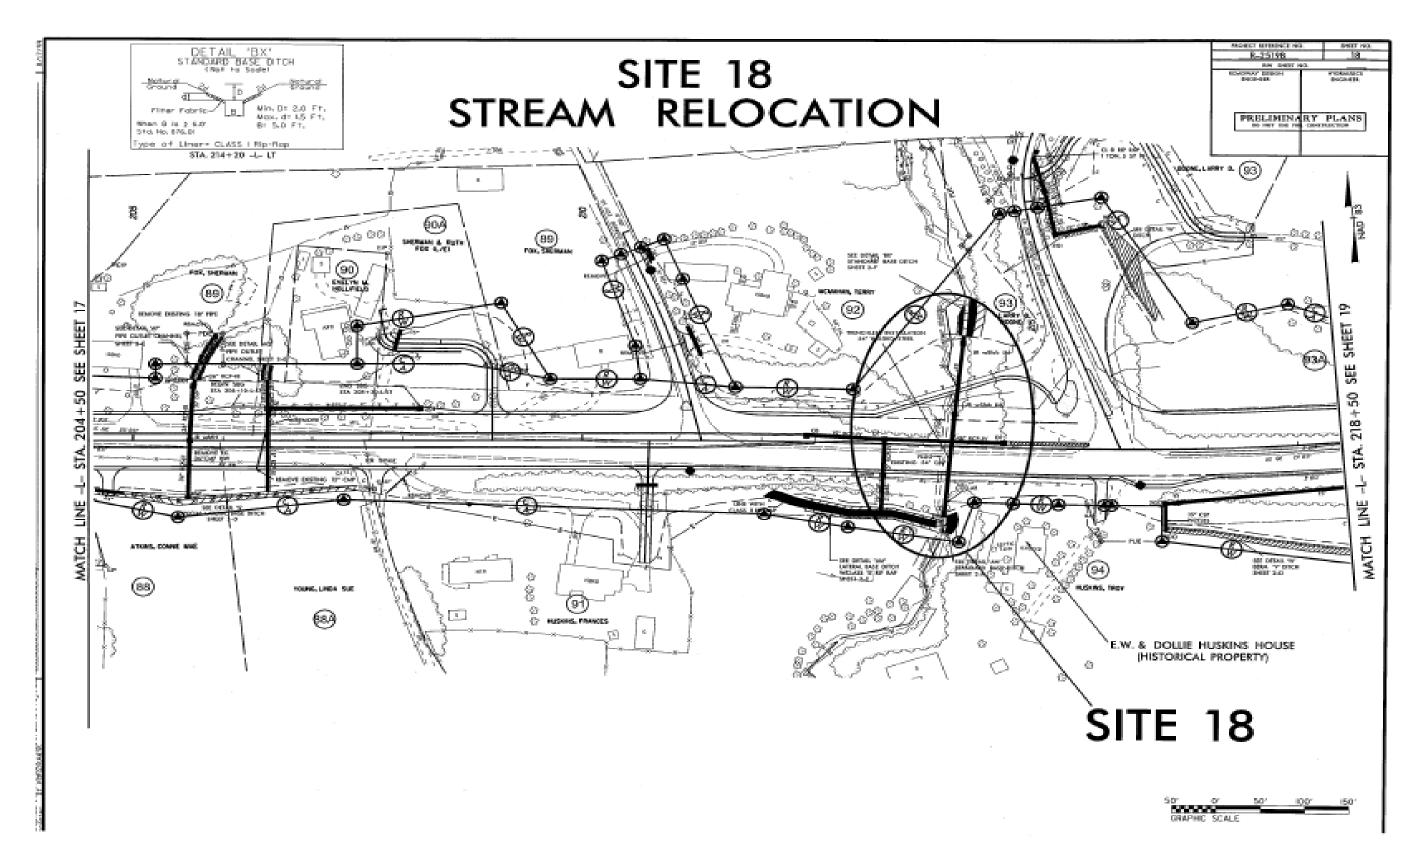


Figure 2. Site #8 Permit Drawing

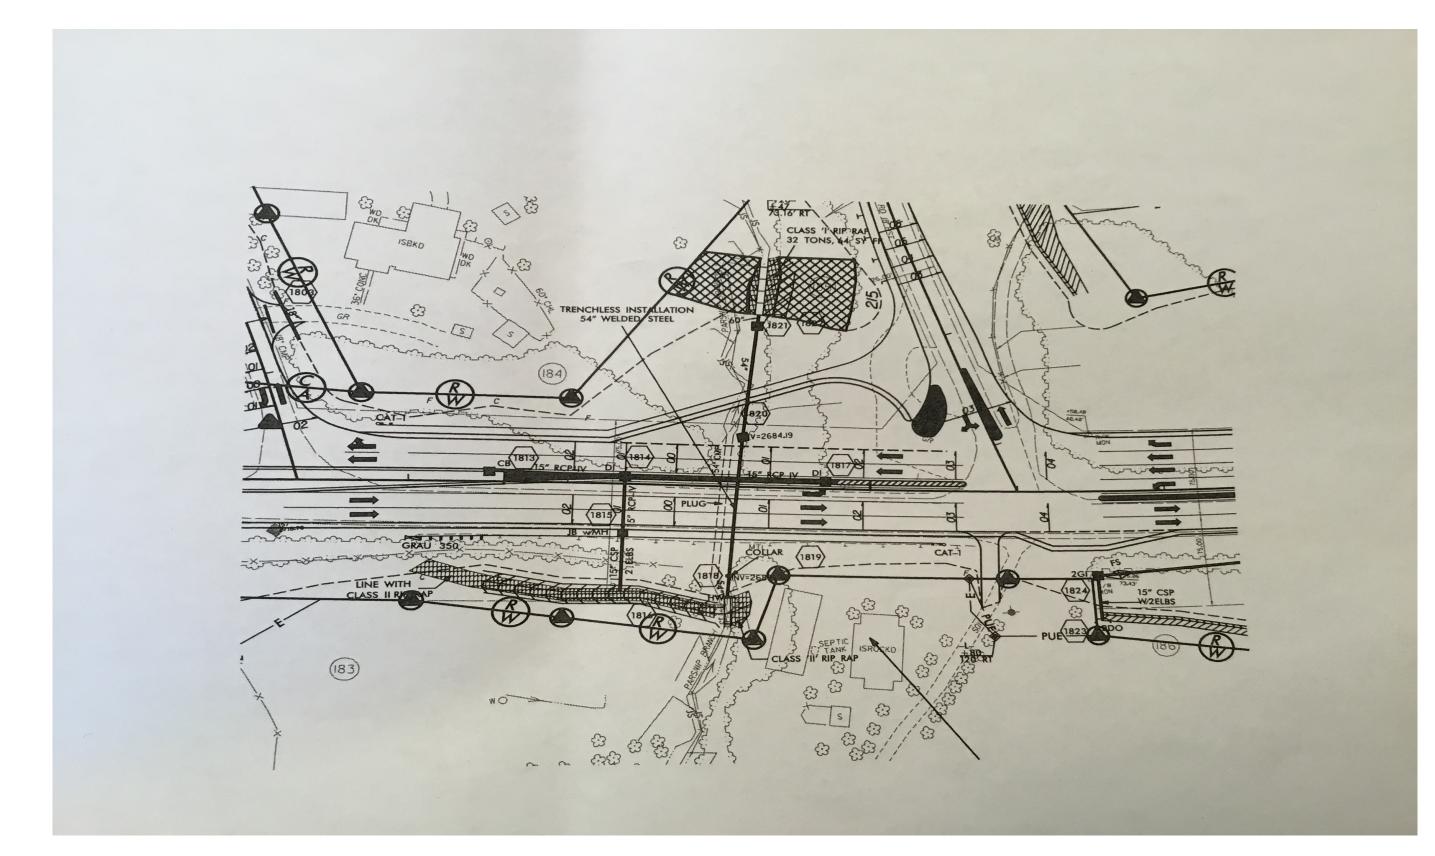


Figure 3. Site #8 Reforestation Plan

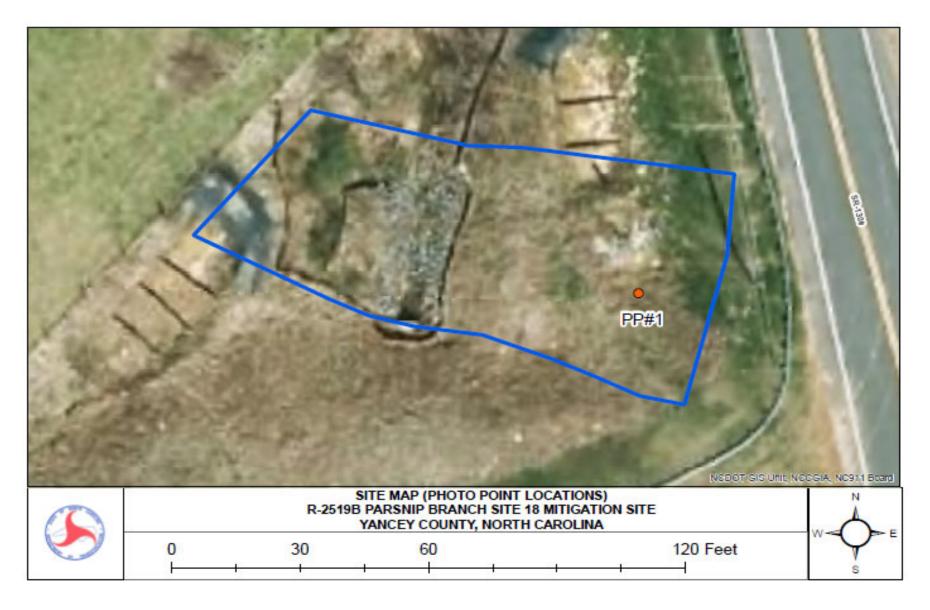


Figure 4. Site #8 Map

## 2.0 STREAM ASSESSMENT

#### 2.1 Success Criteria

Based on email correspondence with the Regulatory Agencies it was agreed to maintain consistency and follow the mitigation plan language as it relates to the vegetation monitoring.

#### **Mitigation Plan**

#### Performance Standards

Performance standards are based on the April 2003 Stream Mitigation Guidelines. Success for vegetation monitoring within the riparian buffer areas will be based on the survival of at least 260 stems of five year old trees at year five. Assessment of channel stability will be based on the survival of riparian vegetation and lack of significant bank erosion, channel widening or down-cutting.

#### **Monitoring Requirements**

Each site will be monitored for five years with no less than two bankfull events, which must occur in separate monitoring years and be documented. If less than two bankfull events occur during the first five years, monitoring will continue until the second bankfull event is documented. The following components of Level 1 monitoring will be performed annually for the monitoring period: reference photos, plant survival monitoring (identification of specific problem areas and remedial action), and visual inspection of channel stability. Vegetation stem counts will be conducted on Sites 8, 21, and 30 only. Physical measurements of channel stability/morphology will only be performed on Site 30. An as-built will be submitted for each site and will include stream channel profile and cross-section surveys which will provide a baseline for comparison if it is determined at any time during the monitoring period that a problem has occurred. Annual monitoring reports will be made available on the NCDOT website.

#### NCDWR Condition #1

The permittee shall visually monitor the vegetative plantings to assess and ensure complete stabilization of the mitigation stream segments. Riparian area success shall be determined by conducting stem counts to ensure a tree survival rate of 320 stems/acre. The monitoring shall be conducted annually for a minimum of 3 years after final planting. Photo documentation shall be utilized to document the success of the riparian vegetation and submitted to NCDWR in a final report within sixty days after completing monitoring. After 3 years the NCDOT shall contact NCDWR to schedule a site visit to "close out" the mitigation site.

#### 2.2 Stream Description

#### 2.2.1 Post-Construction Conditions

The restoration of the Parsnip Branch Site #18 Mitigation Site involved relocating 70 feet of Parsnip Branch due to the installation of a new 54-inch pipe. NCDOT will relocate the stream, instead of extending the new pipe structure at this site. The channel will be lined with Class I rip rap from the channel toe up the side slopes to a height of 1.5 feet. A 50-foot buffer will be planted on the eastern side and a 40-50 buffer will be planted on the western side of the channel. A new overhead utility will be installed just west of Arbuckle Road which will affect the last 15 feet of stream on the right-hand side by reducing the buffer to between 25 to 30 feet.

#### 2.2.2 Monitoring Conditions

The objective of the Parsnip Branch Site #18 stream restoration was to restore a stream as identified in Rosgen's Applied River Morphology. A visual stream assessment will be conducted annually each year of the monitoring period.

#### 2.3 Results of the Stream Assessment

#### 2.3.1 Site Data

The visual assessment of the stream noted that the channel appears stable with little or no active bank erosion. NCDOT will continue to monitor the channel stability at Site #18 in 2022.

# 3.0 VEGETATION: PARSNIP BRANCH SITE #18

#### 3.1 Description of Species

The following tree species were planted on the streambank:

Salix nigra, Black Willow Cornus amomum, Silky Dogwood

The following tree species were planted in the buffer area:

Liriodendron tulipifera, Yellow Poplar Platanus occidentalis, Sycamore Fraxinus pennsylvanica, Green Ash Quercus alba, White Oak Quercus rubra, Northern Red Oak Betula nigra, River Birch Quercus phellos, Willow Oak

#### 3.2 Results of Vegetation Monitoring

**Streambank & Buffer Vegetation:** Visual planted vegetation assessment noted the planted vegetation is surviving at this time. Planted vegetation noted onsite included Yellow Poplar, Sycamore, Northern Red Oak, and River Birch. Japanese Knotweed was noted onsite.

#### 3.3 Conclusions

NCDOT proposes to continue monitoring the planted vegetation at Site #18 in 2022.

# 4.0 OVERALL CONCLUSIONS/RECOMMENDATIONS

The Parsnip Branch Site #18 Mitigation Site has met the required monitoring protocols for the second formal year of monitoring. The channel throughout the stream site is stable at this time. The planted vegetation is surviving at this time. Division 13 Roadside completed spraying of the invasive species in August 2021.

NCDOT proposes to continue stream and vegetation monitoring at the Parsnip Branch Site #18 Mitigation Site in 2022.

#### 5.0 REFERENCES

- Mitigation Plan, US 19E Widening, Yancey and Mitchell Counties, North Carolina TIP Number R-2519B, WBS No. 35609.1.1, May 6, 2013 (Revised November 4, 2013)
- Department of the Army Permit, Permittee: North Carolina Department of Transportation, Permit No. 2004-9987181 / 2004-30631, TIP No. R-2519B, Issuing Office: CESAW-RG-A
- North Carolina Department of Environment and Natural Resources, Division of Water Resources, December 2, 2013, Proposed improvements to US 19E from SR 1186 in Yancey County to multilane section west of Spruce Pine in Mitchell County, State Project No. 6.909001T, WBS Element No. 35609.1.1, TIP R-2519B, NCDWR Project No. 2013-0743v.2
- Rosgen, D.L, 1996. Applied River Morphology. Wildland Hydrology, Pagosa Springs, Colorado.
- US Army Corps of Engineers (USACE), 2003. Stream Mitigation Guidelines. Prepared with cooperation from the US Environmental Protection Agency, NC Wildlife Resources Commission, and the NC Division of Water Resources.

APPENDIX A

SITE PHOTOGRAPHS

# Parsnip Branch Site #18



Photo Point #1 looking to the West



Photo Point #1 looking to the North

July 2021