Wetherill Engineering Inc.

559 Jones Frankin Road, Suite 164
Raleigh NC 27606

Portofino Subdivision, Wilders Township, Johnston County

File Name : PORTOFINO WEEK OF 9-22-14 - 1
Site Code : 00000001
Start Date : 9/16/2014
Page No : 1

Groups Printed- Unshifted - Bank 1

	SR 1003 Buffalo Rd					NC 42					SR 1003 Buffalo Rd					NC 42					
Start Time					App. Total					App. Total					App. Total					App. Total	Int. Total
07:00 AM	11	49	19	0	79	11	76	14	0	101	30	45	5	0	80	19	50	13	0	82	342
07:15 AM	13	56	21	0	90	9	73	8	0	90	32	55	8	0	95	23	49	19	0	91	366
07:30 AM	14	63	25	0	102	8	65	18	0	91	28	64	4	0	96	24	53	20	0	97	386
07:45 AM	15	62	24	0	101	7	58	14	0	79	24	41	8	0	73	24	42	26	0	92	345
Total	53	230	89	0	372	35	272	54	0	361	114	205	25	0	344	90	194	78	0	362	1439
08:00 AM	8	53	21	0	82	5	77	16	0	98	31	44	8	0	83	31	39	10	0	80	343
08:15 AM	11	30	27	0	68	3	40	18	0	61	27	37	5	0	69	36	36	9	0	81	279
08:30 AM	10	38	43	0	91	7	49	17	0	73	28	40	4	0	72	52	43	12	0	107	343
08:45 AM	16	52	60	0	128	5	36	11	0	52	28	29	5	0	62	25	22	21	0	68	310
Total	45	173	151	0	369	20	202	62	0	284	114	150	22	0	286	144	140	52	0	336	1275
Grand Total	98	403	240	0	741	55	474	116	0	645	228	355	47	0	630	234	334	130	0	698	2714
Apprch %	13.2	54.4	32.4	0		8.5	73.5	18	0		36.2	56.3	7.5	0		33.5	47.9	18.6	0		
Total %	3.6	14.8	8.8	0	27.3	2	17.5	4.3	0	23.8	8.4	13.1	1.7	0	23.2	8.6	12.3	4.8	0	25.7	
Unshifted	98	403	240	0	741	55	474	116	0	645	228	355	47	0	630	234	334	130	0	698	2714
% Unshifted	100	100	100	0	100	100	100	100	0	100	100	100	100	0	100	100	100	100	0	100	100
Bank 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
% Bank 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Wetherill Engineering Inc.
559 Jones Frankin Road, Suite 164
Raleigh NC 27606

Portofino Subdivision, Wilders Township, Johnston County

File Name : PORTOFINO WEEK OF 9-22-14 - 1
Site Code : 00000001
Start Date : 9/16/2014
Page No : 2

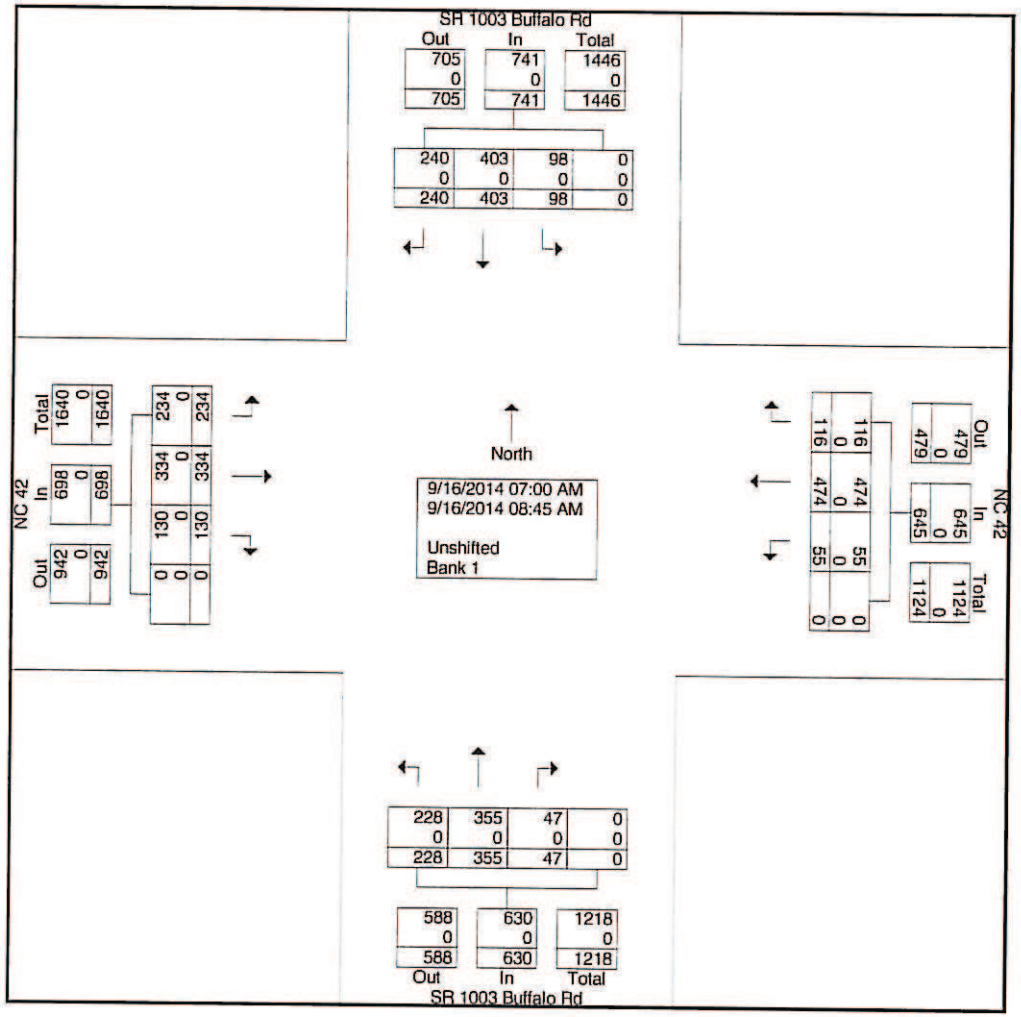

Wetherill Engineering Inc.
559 Jones Frankin Road, Suite 164
Raleigh NC 27606

Portofino Subdivision, Wilders Township, Johnston County

File Name : PORTOFINO WEEK OF 9-22-14 - 1
Site Code : 00000001
Start Date : 9/16/2014
Page No : 3

	SR 1003 Buffalo Rd					NC 42					SR 1003 Buffalo Rd					NC 42					
Start Time					App. Total					App. Total					App. Total					App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 07:15 AM																					
07:15 AM	13	56	21	0	90	9	73	8	0	90	32	55	8	0	95	23	49	19	0	91	366
07:30 AM	14	63	25	0	102	8	65	18	0	91	28	64	4	0	96	24	53	20	0	97	386
07:45 AM	15	62	24	0	101	7	58	14	0	79	24	41	8	0	73	24	42	26	0	92	345
08:00 AM	8	53	21	0	82	5	77	16	0	98	31	44	8	0	83	31	39	10	0	80	343
Total Volume	50	234	91	0	375	29	273	56	0	358	115	204	28	0	347	102	183	75	0	360	1440
% App. Total	13.3	62.4	24.3	0		8.1	76.3	15.6	0		33.1	58.8	8.1	0		28.3	50.8	20.8	0		
PHF	.833	.929	.910	.000	.919	.806	.886	.778	.000	.913	.898	.797	.875	.000	.904	.823	.863	.721	.000	.928	.933

Wetherill Engineering Inc.
559 Jones Frankin Road, Suite 164
Raleigh NC 27606

Portofino Subdivision, Wilders Township, Johnston County

File Name : PORTOFINO WEEK OF 9-22-14 - 1
Site Code : 00000001
Start Date : 9/16/2014
Page No : 4

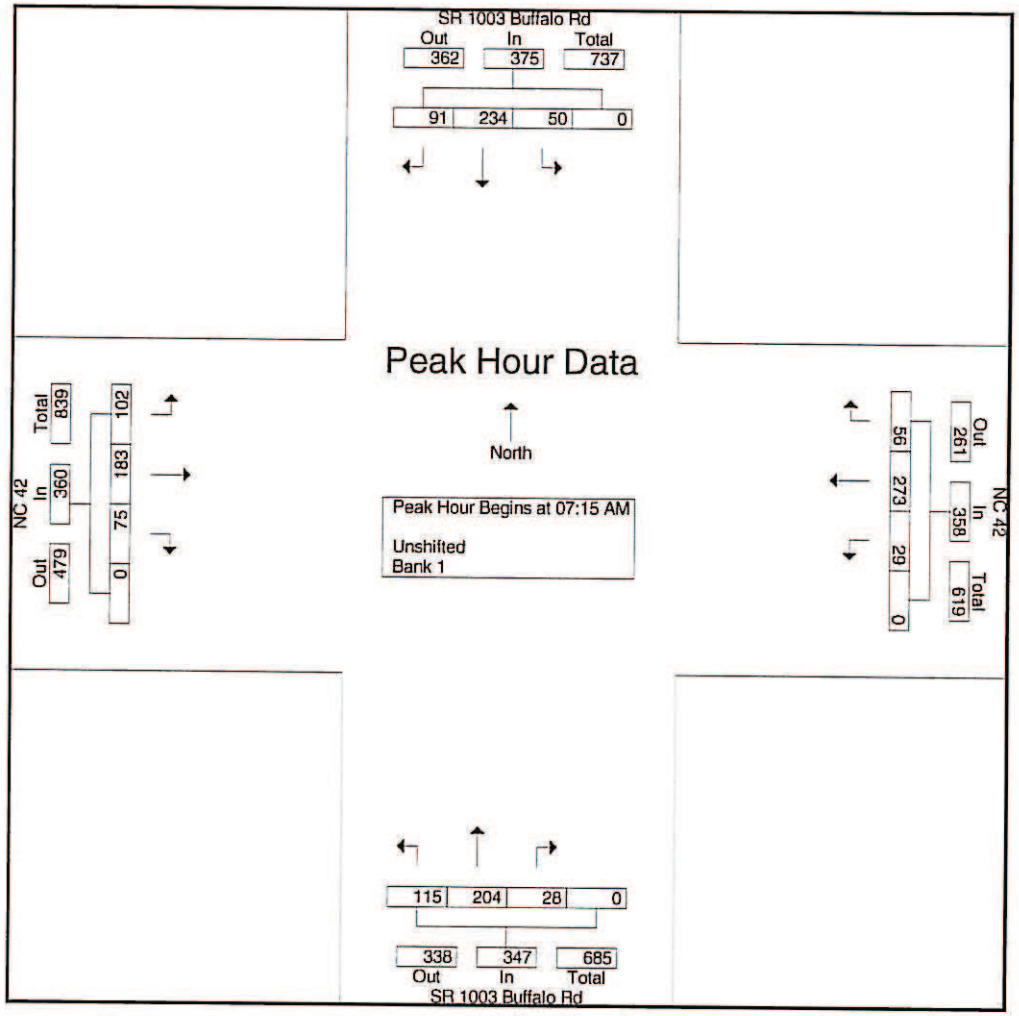

Wetherill Engineering Inc.

559 Jones Frankin Road, Suite 164
Raleigh NC 27606

Portofino Subdivision, Wilders Township, Johnston County

File Name : PORTOFINO WEEK OF 9-22-14 - 2
Site Code : 00000001
Start Date : 9/16/2014
Page No : 1

Groups Printed- Unshifted - Bank 1

	SR 1003 Buffalo Rd					NC 42					SR 1003 Buffalo Rd					NC 42					
Start Time					App. Total					App. Total					App. Total					App. Total	Int. Total
04:00 PM	17	60	45	0	122	17	31	14	0	62	22	43	3	0	68	29	51	22	0	102	354
04:15 PM	20	58	28	0	106	5	36	18	0	59	15	46	7	0	68	22	56	25	0	103	336
04:30 PM	17	49	24	0	90	11	59	11	0	81	30	46	3	0	79	37	68	31	0	136	386
04:45 PM	18	42	36	0	96	11	33	8	0	52	30	51	9	0	90	32	87	23	0	142	380
Total	72	209	133	0	414	44	159	51	0	254	97	186	22	0	305	120	262	101	0	483	1456
05:00 PM	19	57	23	0	99	7	40	12	0	59	22	43	3	0	68	31	65	44	0	140	366
05:15 PM	20	55	24	0	99	11	66	13	0	90	34	88	9	0	131	25	83	20	0	128	448
05:30 PM	17	57	22	0	96	9	68	15	0	92	31	84	11	0	126	23	80	19	0	122	436
05:45 PM	15	50	19	0	84	9	57	11	0	77	31	77	6	0	114	19	79	17	0	115	390
Total	71	219	88	0	378	36	231	51	0	318	118	292	29	0	439	98	307	100	0	505	1640
Grand Total	143	428	221	0	792	80	390	102	0	572	215	478	51	0	744	218	569	201	0	988	3096
Apprch %	18.1	54	27.9	0		14	68.2	17.8	0		28.9	64.2	6.9	0		22.1	57.6	20.3	0		
Total %	4.6	13.8	7.1	0	25.6	2.6	12.6	3.3	0	18.5	6.9	15.4	1.6	0	24	7	18.4	6.5	0	31.9	
Unshifted	143	428	221	0	792	80	390	102	0	572	215	478	51	0	744	218	569	201	0	988	3096
% Unshifted	100	100	100	0	100	100	100	100	0	100	100	100	100	0	100	100	100	100	0	100	100
Bank 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
% Bank 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Wetherill Engineering Inc.
559 Jones Frankin Road, Suite 164
Raleigh NC 27606

Portofino Subdivision, Wilders Township, Johnston County

File Name : PORTOFINO WEEK OF 9-22-14 - 2
Site Code : 00000001
Start Date : 9/16/2014
Page No : 2

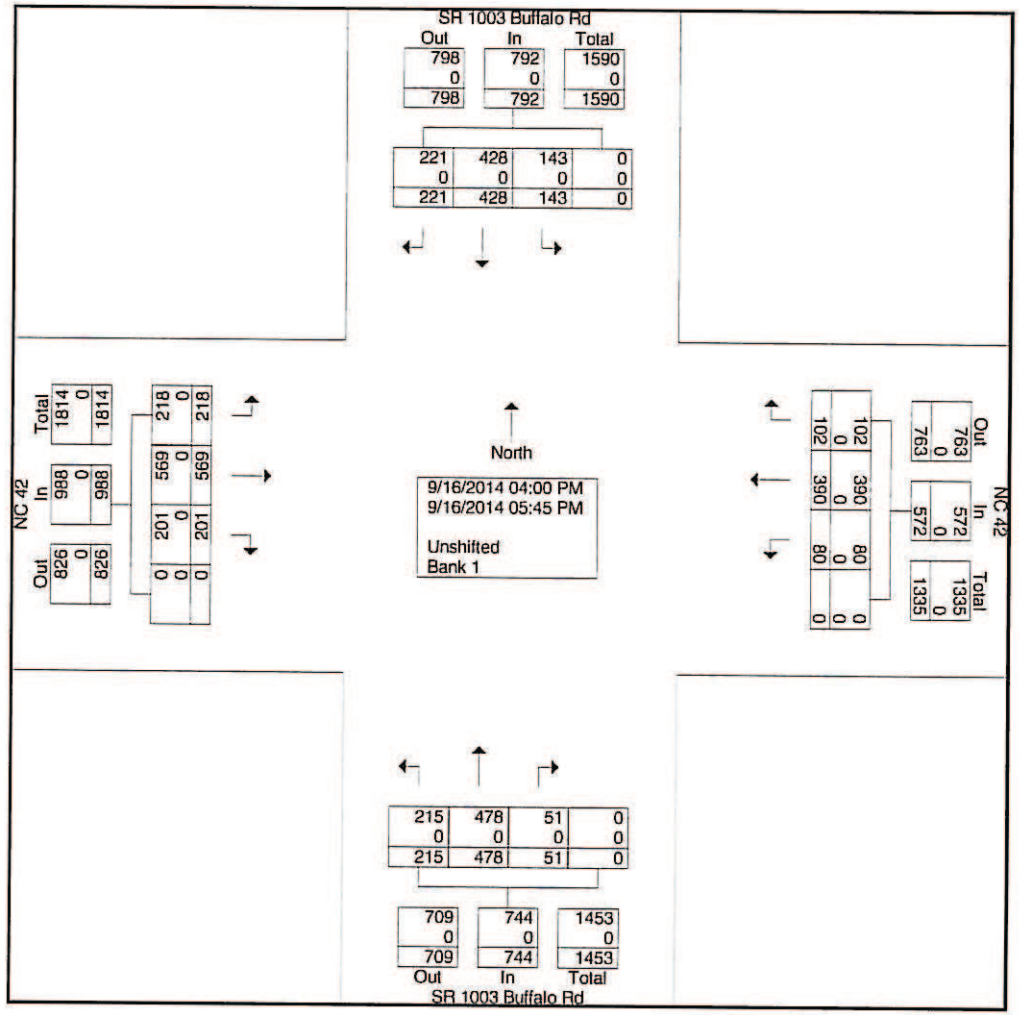

Wetherill Engineering Inc.
559 Jones Frankin Road, Suite 164
Raleigh NC 27606

Portofino Subdivision, Wilders Township, Johnston County

File Name : PORTOFINO WEEK OF 9-22-14 - 2
Site Code : 00000001
Start Date : 9/16/2014
Page No : 4

	SR 1003 Buffalo Rd					NC 42					SR 1003 Buffalo Rd					NC 42					
Start Time					App. Total					App. Total					App. Total					App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																					
Peak Hour for Each Approach Begins at:																					
	04:00 PM					05:00 PM					05:00 PM					04:30 PM					
+0 mins.	17	60	45	0	122	7	40	12	0	59	22	43	3	0	68	37	68	31	0	136	
+15 mins.	20	58	28	0	106	11	66	13	0	90	34	88	9	0	131	32	87	23	0	142	
+30 mins.	17	49	24	0	90	9	68	15	0	92	31	84	11	0	126	31	65	44	0	140	
+45 mins.	18	42	36	0	96	9	57	11	0	77	31	77	6	0	114	25	83	20	0	128	
Total Volume	72	209	133	0	414	36	231	51	0	318	118	292	29	0	439	125	303	118	0	546	
% App. Total	17.4	50.5	32.1	0		11.3	72.6	16	0		26.9	66.5	6.6	0		22.9	55.5	21.6	0		
PHF	.900	.871	.739	.000	.848	.818	.849	.850	.000	.864	.868	.830	.659	.000	.838	.845	.871	.670	.000	.961	

Wetherill Engineering Inc.
559 Jones Frankin Road, Suite 164
Raleigh NC 27606

Portofino Subdivision, Wilders Township, Johnston County
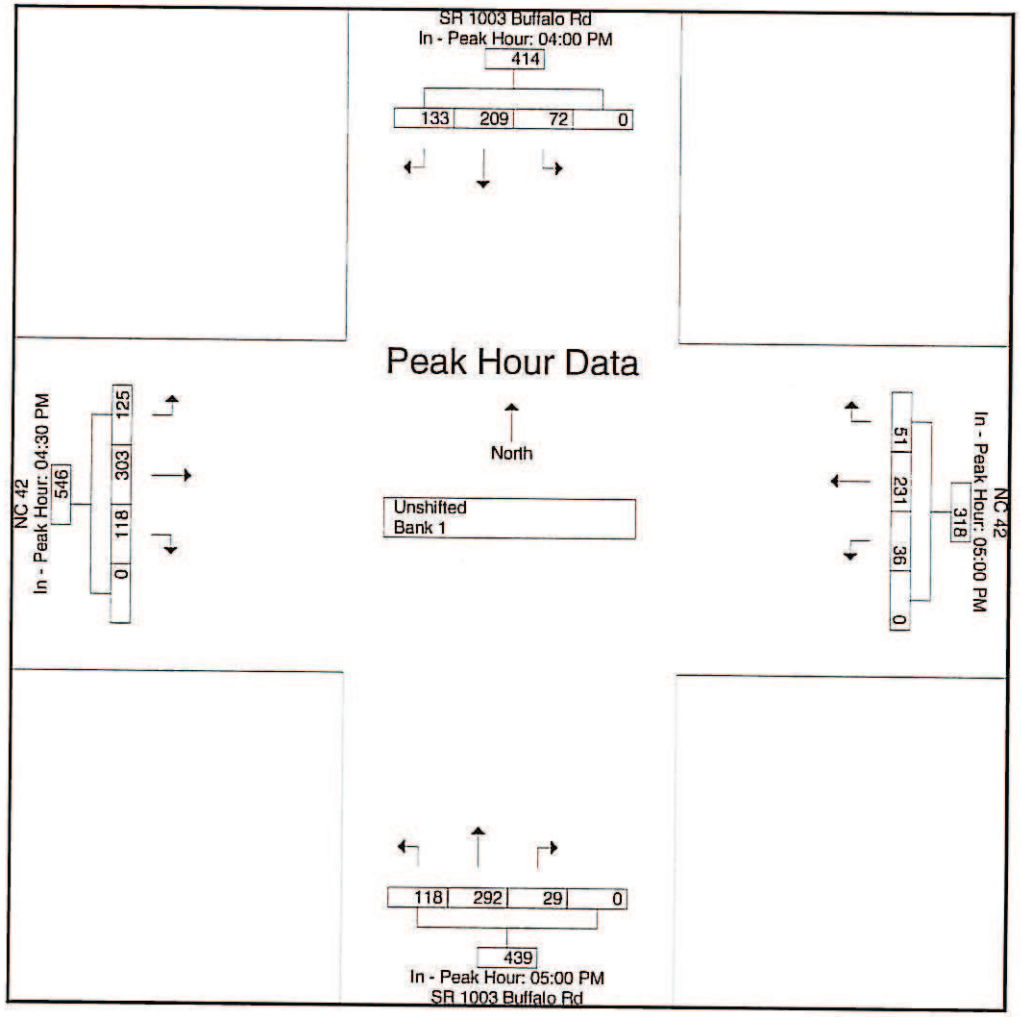
File Name : PORTOFINO WEEK OF 9-22-14 - 2
Site Code : 00000001
Start Date : 9/16/2014
Page No : 5