

LOAD AND RESISTANCE FACTOR RATING (LRFR) SUMMARY FOR PRESTRESSED CONCRETE GIRDERS																								
LOAD TYPE	VEHICLE	WEIGHT (W) (TONS)	CONTROLLING LOAD RATING ⬢	MINIMUM RATING FACTORS (RF)	TONS = W x RF	STRENGTH I LIMIT STATE										SERVICE III LIMIT STATE						COMMENT NUMBER		
						LIVE-LOAD FACTORS (γ LL)	MOMENT				SHEAR				LIVE-LOAD FACTORS (γ LL)	MOMENT								
							DISTRIBUTION FACTORS (DF)	RATING FACTOR	SPAN	GIRDER LOCATION	DISTANCE FROM LEFT END OF SPAN (ft)	DISTRIBUTION FACTORS (DF)	RATING FACTOR	SPAN		GIRDER LOCATION	DISTANCE FROM LEFT END OF SPAN (ft)	DISTRIBUTION FACTORS (DF)	RATING FACTOR	SPAN	GIRDER LOCATION		DISTANCE FROM LEFT END OF SPAN (ft)	
DESIGN LOAD	HL-93 (INVENTORY)	N/A	⬢1	1.202	--	1.75	0.256	2.04	30'	EL	14.423	0.655	1.20	30'	EL	1.442	0.80	0.256	1.75	30'	EL	14.423		
	HL-93 (OPERATING)	N/A		1.558	--	1.35	0.256	2.64	30'	EL	14.423	0.655	1.56	30'	EL	1.442	N/A	--	--	--	--	--		
	HS-20 (INVENTORY)	36.000	⬢2	1.365	49.124	1.75	0.256	2.82	30'	EL	11.538	0.655	1.36	30'	EL	1.442	0.80	0.256	2.45	30'	EL	11.538		
	HS-20 (OPERATING)	36.000		1.769	63.679	1.35	0.256	3.65	30'	EL	11.538	0.655	1.77	30'	EL	1.442	N/A	--	--	--	--	--		
LEGAL LOAD	SINGLE VEHICLE (SV)	SNSH	13.500		3.333	45.002	1.4	0.256	5.76	30'	EL	14.423	0.655	3.33	30'	EL	1.442	0.80	0.256	3.95	30'	EL	14.423	
		SNGARBS2	20.000		2.581	51.624	1.4	0.256	5.04	30'	EL	11.538	0.655	2.58	30'	EL	1.442	0.80	0.256	3.50	30'	EL	11.538	
		SNAGRIS2	22.000		2.487	54.723	1.4	0.256	5.13	30'	EL	11.538	0.655	2.49	30'	EL	1.442	0.80	0.256	3.56	30'	EL	11.538	
		SNCOTTS3	27.250		1.684	45.891	1.4	0.256	2.89	30'	EL	14.423	0.655	1.68	30'	EL	1.442	0.80	0.256	1.99	30'	EL	14.423	
		SNAGGRS4	34.925		1.551	54.185	1.4	0.256	2.79	30'	EL	14.423	0.655	1.55	30'	EL	1.442	0.80	0.256	1.91	30'	EL	14.423	
		SNS5A	35.550		1.645	58.469	1.4	0.256	2.70	30'	EL	14.423	0.655	1.64	30'	EL	1.442	0.80	0.256	1.85	30'	EL	14.423	
		SNS6A	39.950		1.547	61.791	1.4	0.256	2.55	30'	EL	14.423	0.655	1.55	30'	EL	1.442	0.80	0.256	1.75	30'	EL	14.423	
		SNS7B	42.000		1.578	66.285	1.4	0.256	2.48	30'	EL	14.423	0.655	1.58	30'	EL	1.442	0.80	0.256	1.70	30'	EL	14.423	
	TRUCK TRACTOR SEMI-TRAILER (TTST)	TNAGRIT3	33.000		1.838	60.670	1.4	0.256	3.31	30'	EL	14.423	0.655	1.84	30'	EL	1.442	0.80	0.256	2.27	30'	EL	14.423	
		TNT4A	33.075		1.710	56.559	1.4	0.256	3.13	30'	EL	14.423	0.655	1.71	30'	EL	1.442	0.80	0.256	2.15	30'	EL	14.423	
		TNT6A	41.600		1.652	68.714	1.4	0.256	2.85	30'	EL	14.423	0.655	1.65	30'	EL	1.442	0.80	0.256	1.96	30'	EL	14.423	
		TNT7A	42.000		1.573	66.067	1.4	0.256	2.94	30'	EL	14.423	0.655	1.57	30'	EL	1.442	0.80	0.256	2.02	30'	EL	14.423	
		TNT7B	42.000		1.536	64.525	1.4	0.256	2.77	30'	EL	14.423	0.655	1.54	30'	EL	1.442	0.80	0.256	1.90	30'	EL	14.423	
		TNAGRIT4	43.000		1.486	63.900	1.4	0.256	2.87	30'	EL	14.423	0.655	1.49	30'	EL	1.442	0.80	0.256	1.97	30'	EL	14.423	
		TNAGT5A	45.000		1.594	71.736	1.4	0.256	2.79	30'	EL	14.423	0.655	1.59	30'	EL	1.442	0.80	0.256	1.92	30'	EL	14.423	
		TNAGT5B	45.000	⬢3	1.399	62.946	1.4	0.256	2.68	30'	EL	11.538	0.655	1.40	30'	EL	1.442	0.80	0.256	1.85	30'	EL	11.538	
EMERGENCY VEHICLE (EV)	EV2	28.750		2.472	71.072	1.3	0.256	3.95	30'	EL	11.538	0.655	2.64	30'	EL	1.442	0.80	0.256	2.47	30'	EL	11.538		
	EV3	43.000	⬢4	1.596	68.609	1.3	0.256	2.58	30'	EL	14.423	0.655	1.81	30'	EL	1.442	0.80	0.256	1.60	30'	EL	14.423		

LOAD FACTORS:

DESIGN LOAD RATING FACTORS	LIMIT STATE	γDC	γDW
	STRENGTH I	1.25	1.50
	SERVICE III	1.00	1.00

NOTES:

MINIMUM RATING FACTORS ARE BASED ON THE STRENGTH I AND SERVICE III LIMIT STATES.

ALLOWABLE STRESSES FOR SERVICE III LIMIT STATE ARE AS REQUIRED FOR DESIGN.

⬡# CONTROLLING LOAD RATING

⬡1 DESIGN LOAD RATING (HL-93)

⬡2 DESIGN LOAD RATING (HS-20)


⬡3 LEGAL LOAD RATING * *

⬡4 EMERGENCY VEHICLE LOAD RATING **

* * SEE CHART FOR VEHICLE TYPE

GIRDER LOCATION

I - INTERIOR GIRDER
EL - EXTERIOR LEFT GIRDER
ER - EXTERIOR RIGHT GIRDER

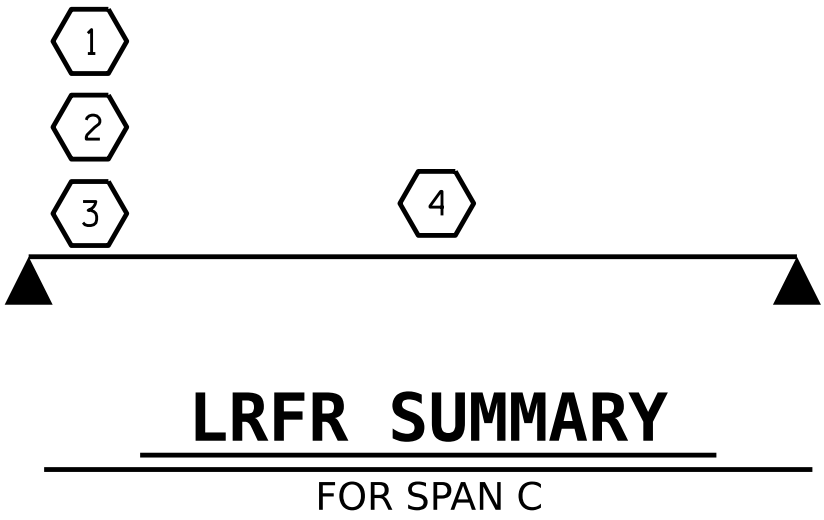

PROJECT NO. **BP14-R038**
POLK COUNTY
STATION: **13+52.50 -L1-**

SHEET 3 OF 3

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH
STANDARD
LRFR SUMMARY FOR
30' CORED SLAB UNIT
60° SKEW
(NON-INTERSTATE TRAFFIC)

REVISIONS					SHEET NO.	
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			S-7
2			4			TOTAL SHEETS 32

DOCUMENT NOT CONSIDERED
FINAL UNLESS ALL
SIGNATURES COMPLETED



VHB Engineering NC, P.C. (C-3705)
940 Main Campus Drive, Suite 500
Raleigh, NC 27606

DRAWN BY : C.P. MALAGON	DATE : 08/2025
CHECKED BY : E.C. PHELPS	DATE : 08/2025
DESIGN ENGINEER OF RECORD: W.K. FISCHER	DATE : 09/2025