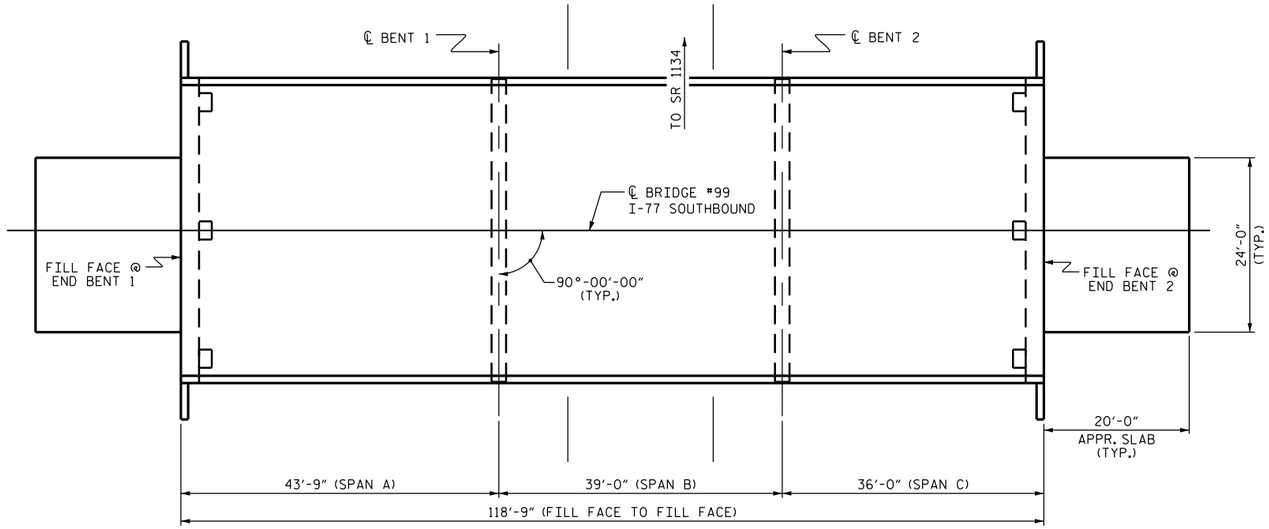

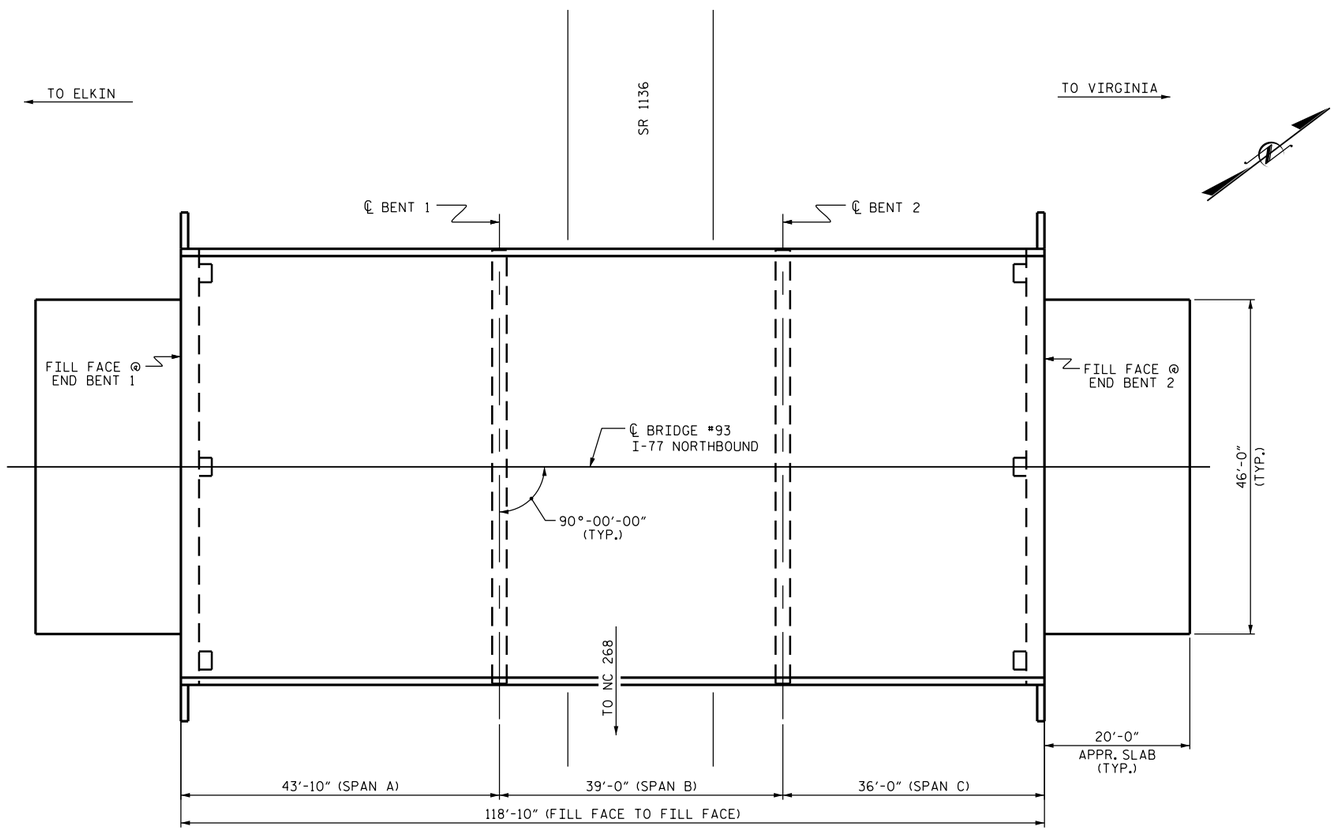

PLAN

NOTES

PLAN INFORMATION IS TAKEN FROM THE ORIGINAL PLANS AND THE ROUTINE INSPECTION REPORTS DATED 01/12/2016 AND 01/27/2016.

BRIDGE ORIENTATIONS CONFORM TO EXISTING BRIDGE PLANS.

SCOPE OF WORK

- PARTIALLY REMOVE BRIDGE DECK CONCRETE USING SHOTBLASTING METHODS.
- DEMOLISH EXISTING JOINTS AT END BENTS.
- RECONSTRUCT END BENT JOINTS AND INSTALL SILICONE JOINT SEALS.
- OVERLAY PREPARED BRIDGE DECKS WITH EPOXY OVERLAY SYSTEM.

I HEREBY CERTIFY THAT THIS STRUCTURE WAS REHABILITATED ACCORDING TO THESE PLANS OR AS NOTED HEREIN.

RESIDENT ENGINEER DATE

PROJECT NO. I-5801
SURRY COUNTY
BRIDGE NO. 93 & 99
SHEET 1 OF 2

DocuSigned by:
John A. Yannaccone
7BC36...

NORTH CAROLINA PROFESSIONAL SEAL 32492 ENGINEER JOHN A. YANNACCONE

7/13/2016

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

GENERAL DRAWING

FOR BRIDGES ON I-77
OVER SR 1136
(EBENEZER CHURCH ROAD)

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-1
1			3			TOTAL SHEETS
2			4			4

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

DRAWN BY : S. WANCE DATE : 05/16
CHECKED BY : J. YANNACCONE DATE : 05/16

13-JUL-2016 12:25
R:\Structures\FinalDrawings\I5801_SD_93_and_99_GD.dgn
jayannaccone