




# TYPICAL SECTIONS WBS ELEMENT 3CR.20711.142

**MAP NO. 3**

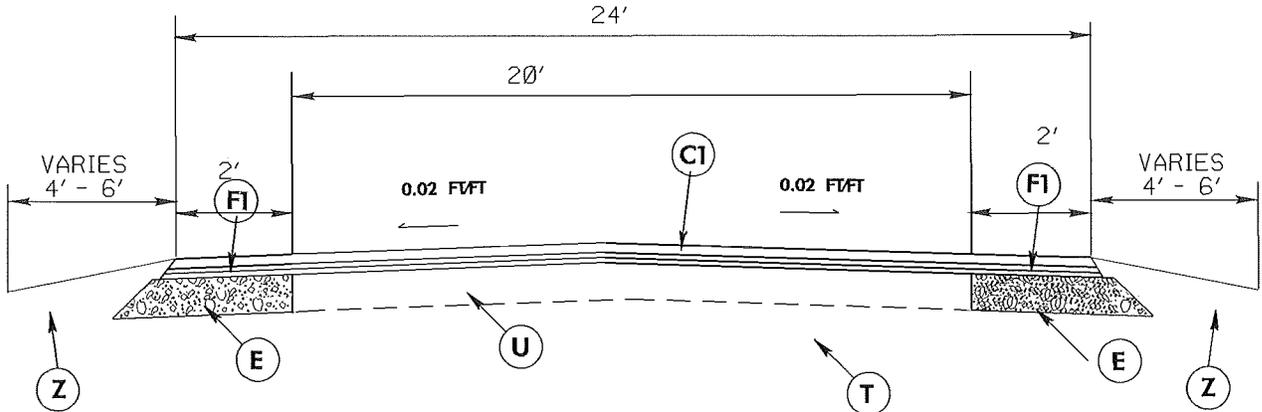

## TYPICAL SECTION NO. 3

CHANNEL FOR WIDENING, MAT & RESURFACE  
USE ON SR 1582

<b>C</b>	PROP. APPROX. 1" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD.
<b>C1</b>	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
<b>E</b>	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
<b>F</b>	MAT WITH NO. 6 STONE BY STATE FORCES
<b>F1</b>	MAT WITH NO. 78M STONE BY STATE FORCES
<b>T</b>	EXISTING SUBGRADE MATERIAL
<b>U</b>	EXISTING PAVEMENT
<b>Z</b>	SHOULDER RECONSTRUCTION BY STATE FORCES