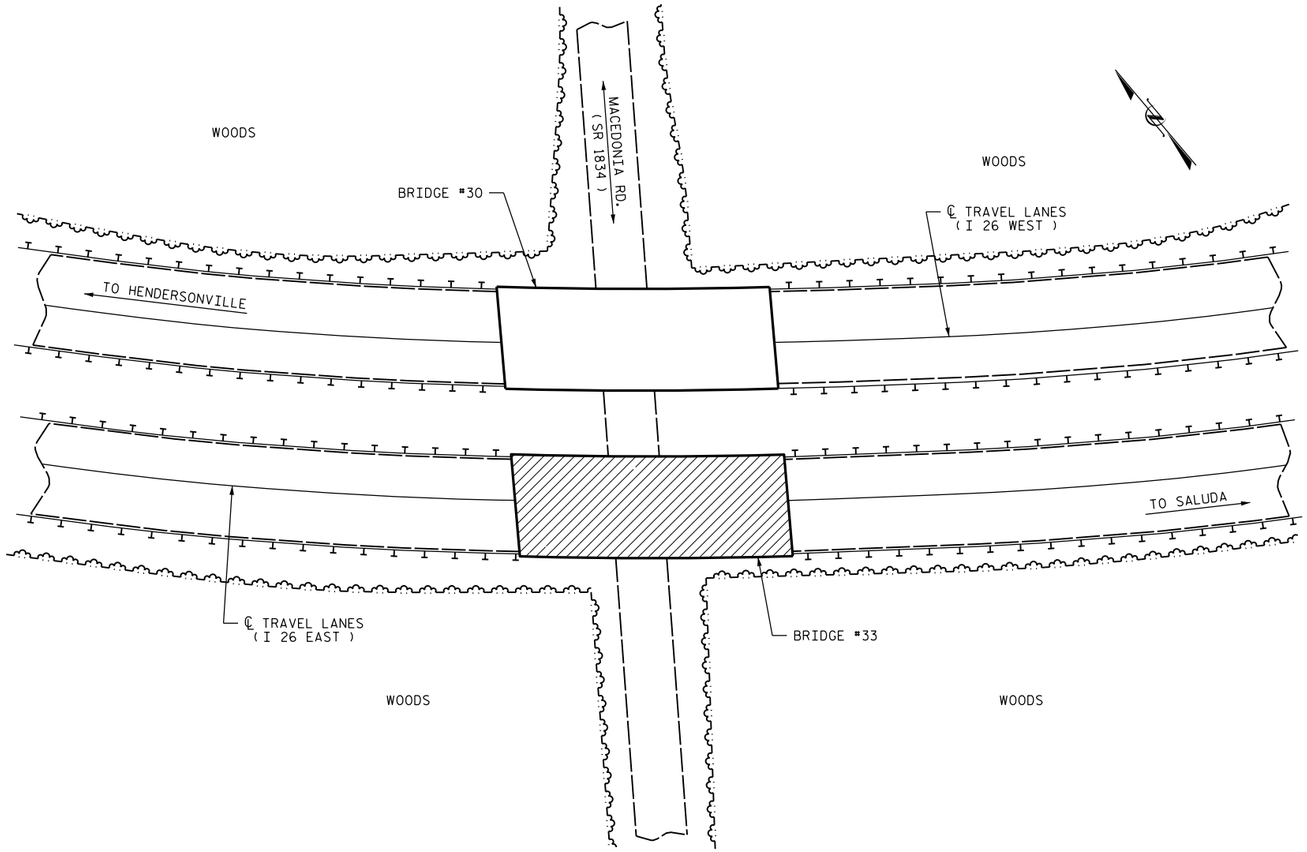

LOCATION SKETCH

NOTES:

EXISTING DIMENSIONS AND BRIDGE CONDITION ARE FROM BEST INFORMATION AVAILABLE. THE CONTRACTOR SHALL FIELD VERIFY THE INFORMATION SHOWN ON THE PLANS AND NOTIFY THE ENGINEER IF ACTUAL DIMENSIONS AND CONDITIONS DIFFER.

IT IS THE CONTRACTOR'S RESPONSIBILITY TO FOLLOW ALL STATE AND FEDERAL SAFETY REQUIREMENTS.

FOR "SUBMITTAL OF WORKING DRAWINGS", SEE SPECIAL PROVISIONS.

FOR "FALSEWORK AND FORMWORK", SEE SPECIAL PROVISIONS.

FOR "CRANE SAFETY", SEE SPECIAL PROVISIONS.

FOR "GROUT FOR STRUCTURES", SEE SPECIAL PROVISIONS.

FOR CONTROL OF TRAFFIC AND LIMITS ON PHASING OF CONSTRUCTION, SEE TRANSPORTATION MANAGEMENT PLAN.

FOR "PILE ENCASEMENT REMOVAL", SEE SPECIAL PROVISIONS.

FOR "PAINTING EXISTING STRUCTURAL STEEL AND STEEL PILES", SEE SPECIAL PROVISIONS.

TOTAL BILL OF MATERIAL

POLLUTION CONTROL	PAINTING OF EXISTING STEEL PILES	REMOVAL OF EXISTING PILE ENCASEMENT	STEEL PILE REPAIR
LUMP SUM	LUMP SUM	CU. YDS.	LBS.
LUMP SUM	LUMP SUM	52	25

PROJECT NO. BP-5500BB
HENDERSON COUNTY
BRIDGE NO. 33

SHEET 2 OF 2

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

GENERAL DRAWING

BRIDGE #33 ON I26 EAST
OVER MACEDONIA RD.
(SR1834)

NORTH CAROLINA PROFESSIONAL SEAL 035635 ENGINEER DAVID N. SNOKE
4/14/14

REVISIONS								SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:			S-17
1			3					TOTAL SHEETS
2			4					19

DRAWN BY : P.C. BREWER DATE : 2/14
CHECKED BY : D.N. SNOKE DATE : 3/14
DESIGN ENGINEER OF RECORD: - DATE : -

14-APR-2014 10:51
S:\PBS\POC\Squad C\Preservation_Projects\BP-5500\BB\Henderson_30\440033_SD_GD.dgn
pbrewer