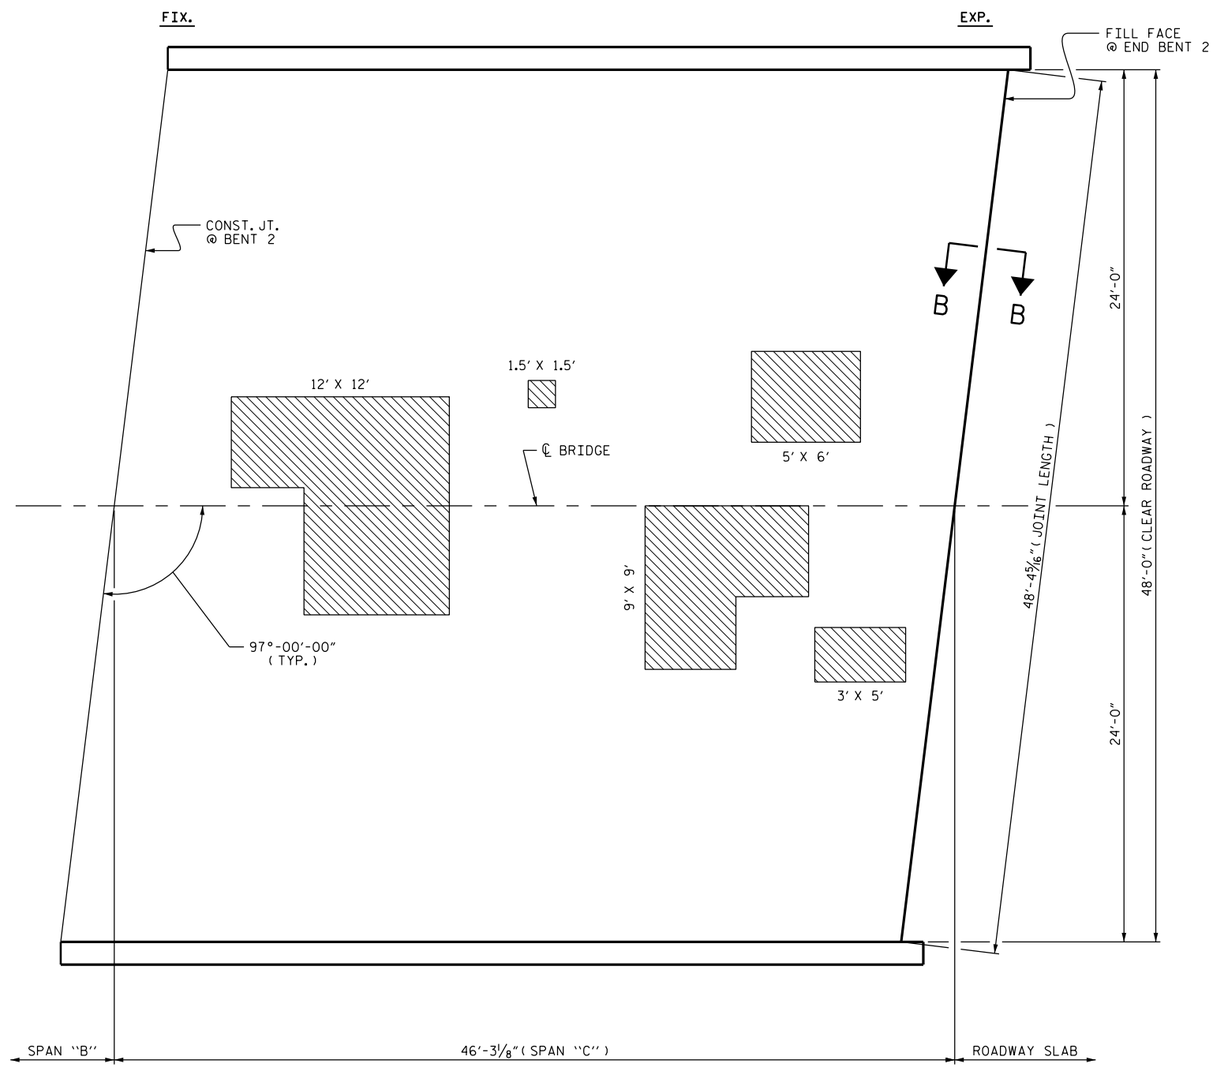

PLAN OF SPAN "C"

(FOR SECTION VIEWS, SEE "JOINT DETAILS" SHEET.)

SPAN "C" QUANTITIES

	ESTIMATE	ACTUAL
CLASS II SURFACE PREPARATION	31 SQ. YDS.	
CLASS III SURFACE PREPARATION	0 SQ. YDS.	
SCARIFYING BRIDGE DECK	249 SQ. YDS.	
HYDRO-DEMOLITION OF BRIDGE DECK	249 SQ. YDS.	

PAYMENT FOR CLASS II & CLASS III SURFACE PREPARATION IS BASED ON THE SQUARE FEET OF ADDITIONAL DEMOLITION REQUIRED FOLLOWING HYDRO-DEMOLITION OF THE BRIDGE DECK. SEE SPECIAL PROVISIONS.

CLASS II SURFACE PREPARATION

SCARIFICATION & HYDRO-DEMOLITION

PROJECT NO. BP-5500DD

SWAIN COUNTY

BRIDGE NO. 16

SHEET 3 OF 4

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

SURFACE PREPARATION

SPAN "C"

NORTH CAROLINA PROFESSIONAL SEAL 035635 ENGINEER DAVID N. SNOKE
4/21/14

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-19
1			3			TOTAL SHEETS
2			4			24

DRAWN BY : P.C. BREWER DATE : 3/14
CHECKED BY : D.N. SNOKE DATE : 4/14
DESIGN ENGINEER OF RECORD: - DATE : -

29-APR-2014 15:16
S:\PRS\POC\Squad C\Preservation_Projects\BP-5500\DD\SWAIN_16\860016_SD_LMC.dgn
pbrewer