NCDOT Prioritization 3.0 Project Summary

SPOT ID: H111067 **Mode:** Highway **Status:** Submitted

US-301

From/Cross Street: NC 20

To: I-95 Exit 25

Length: 6.24

Specific Improvement Type: 1 - Widen Existing Roadway

Project Category: Regional Impact

TIP#:

Fully Funded in Draft STIP? No

Cost to NCDOT: $18,052,000

Description:

Widen Roadway to Four Lanes with a Median

Division(s): Division 6

County(s): ROBESON

MPOS(s)/RPO(s): Lumber River RPO

Project Location

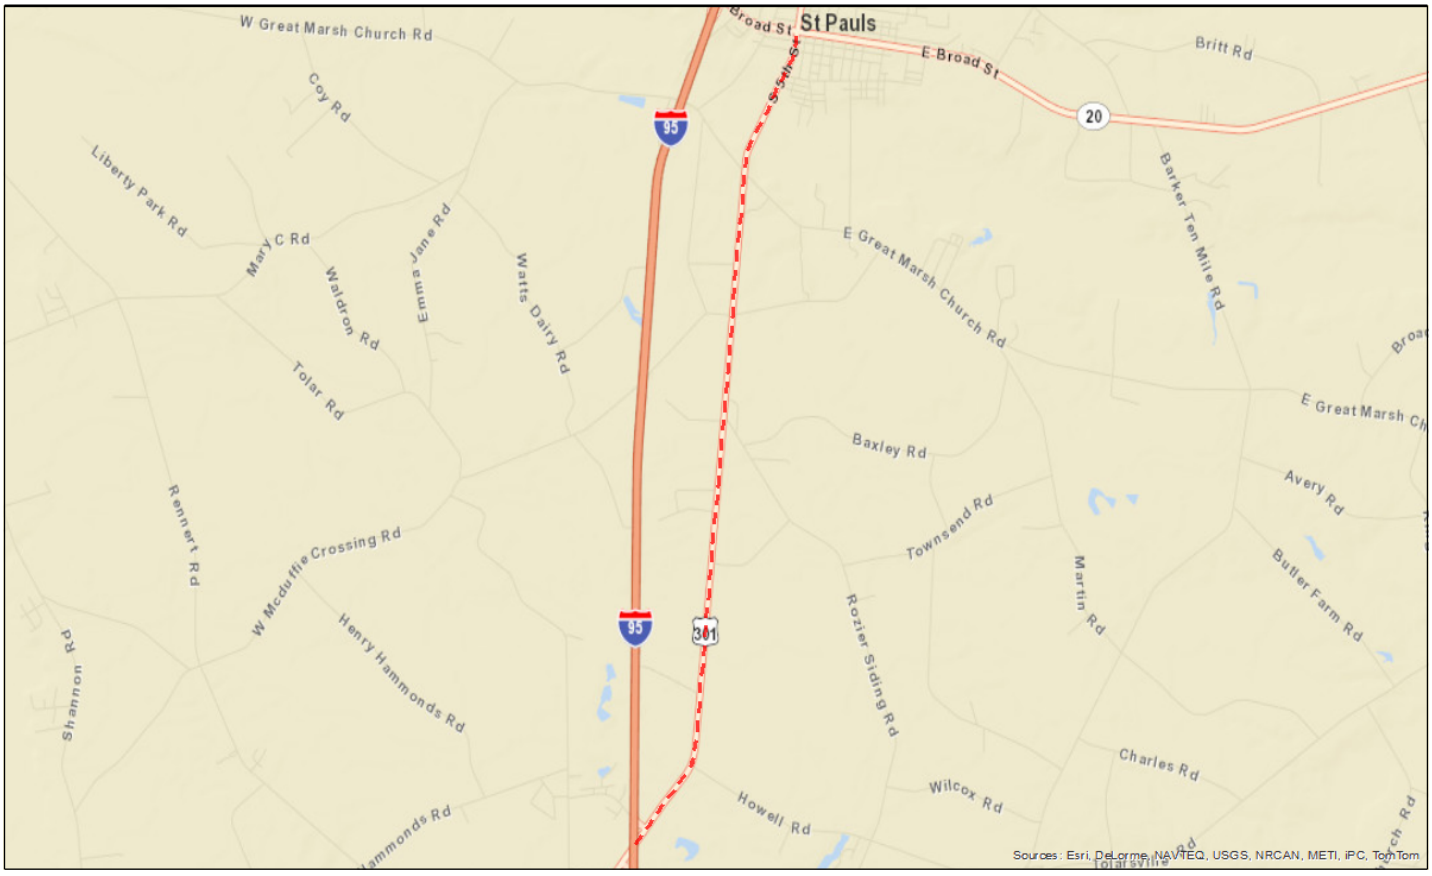

Statewide Mobility Total Score: 0

Quanitative Score	Division Engineer Local Input Points	MPO/RPO Local Input Points
Totals: Weight: 0% Weighted Score: 0	N/A	N/A

Regional Impact Total Score: 0

Quanitative Score		Division Engineer Local Input Points	MPO/RPO Local Input Points
Congestion (V/C) (25%)	13.94	Percent: 15%	Percent: 15%
Safety (10%)	63.28	Points:	Points:
[Travel Time] Benefit/Cost (25%)	0.00		
Accessibility / Connectivity (10%)	7.27		
Totals: Weight: 70% Weighted Score: 10.54			

Division Needs Total Score: 0

Quantitative Score		Division Engineer Local Input Points	MPO/RPO Local Input Points
Congestion (V/C) (20%)	13.94	Percent: 25%	Percent: 25%
Safety (10%)	63.28	Points:	Points:
[Travel Time] Benefit/Cost (20%)	0.00		
Totals: Weight: 50% Weighted Score: 9.12			

Project Data *

Existing Conditions

Existing Cross-Section:	
Speed Limit:	54
Length (miles);	6.24
Facility Type:	Two Lane Highway
Access Control:	None
Functional Classification:	Major Collector
Terrain Type:	Level
Lane Width:	11
Paved Shoulder Width:	2
Roadway has Curb & Gutter?	No
Volume (AADT):	3265.39
Capacity:	15509.91
Volume/Capacity Ratio:	0.21
% Autos:	96%
% Trucks:	4%
Truck Volume:	125.08
Crash Density:	62.54
Crash Severity:	59.46
Critical Crash Rate:	67.87
Crash Frequency:	0
Severity Index:	0
County Tier Designation:	1
Non-Interstate STRAHNET Route?	No
Average Commuting Time:	22
Existing Median Type (for Cost Estimation):	Undivided
Pavement Condition Rating:	70
Actual Congested Speed:	49.84
Travel Time Index:	1.09

Project Benefits

Project Cross-Section:	4C - 4 Lane Divided (23' Raised Median) with Curb & Gutter, Wide Outside Lanes, and Sidewalks
Speed Limit:	45
Length (miles):	6.24
Facility Type:	Arterial
Access Control:	Partial
Functional Classification:	Major Collector
TerrainType:	Level
DOT Design Lane Width:	12
DOT Design Paved Shoulder Width:	0
Travel Time Savings for 30 Years (Total):	-2914451.57
Travel Time Savings for 30 Years (Autos):	-2802817.73
Travel Time Savings for 30 Years (Trucks):	-111633.84
Long-Term Employment:	
% Change in Economy:	
Provides Direct Connection to Transportation Terminal?	No
Does project upgrade how the roadway functions?	No
In CTP or LRTP?	No
CTP/LRTP Name:	
CTP/LRTP Completion Year:	
Submitted by:	Division 6

***** Data reflects calculations which include weighted averages (where applicable) and represent raw output from the Department's SPOT On!ine tool and associated databases.

Project Ownership

Division

Division	Percent	Regional Impact	Division Needs
Division 6	100%	0	0
	0%	0	0
	0%	0	0
TOTAL Division Points		**0**	**0**

MPO/RPO

MPO/RPO	Percent	Regional Impact	Division Needs
Lumber River RPO	100%	0	0
	0%	0	0
	0%	0	0
TOTAL MPO/RPO Points		**0**	**0**

Project Cost and Source

Construction Cost:	$14,364,000	TIP Unit
Right-of-Way Cost:	$3,293,000	Cost Estimation Tool
Utilities Cost:	$395,000	Cost Estimation Tool
Total Project Cost:	$18,052,000	
Other Funding:	$0	None
Cost to NCDOT :	**$18,052,000**	